

AL101 Indoor Alarm Model AL101-2 Dual Indoor Alarm

The Model AL101-2 is an Indoor alarm that accepts two switch contact inputs and provides an audible alarm signal when the external contacts are closed. A red lighted push-button provides the visual alarm indication for each input. The push-button is a momentary switch that, when pressed, mutes the buzzer. The red light remains on until the alarm condition is corrected. The alarm circuit resets automatically. It must be mounted in a non-hazardous location. Use Ktech float switches for the alarm input contacts.

Electrical Specifications

- 120 VAC, 60 Hz, 85mA
- Switch input at terminals 4 & 5 – TANK #1
- Switch input at terminals 6 & 7 – TANK #2
- Buzzer -- 95 dB @1 ft.




**LISTED
OVERFILL
PROTECTION
DEVICES
4YC9**



**Certified to CSA C22.2 No.205 and Conforms to UL2017
CAUTION: REFER TO INSTRUCTIONS BEFORE OPERATING ALARMS**

Intertek

9700099

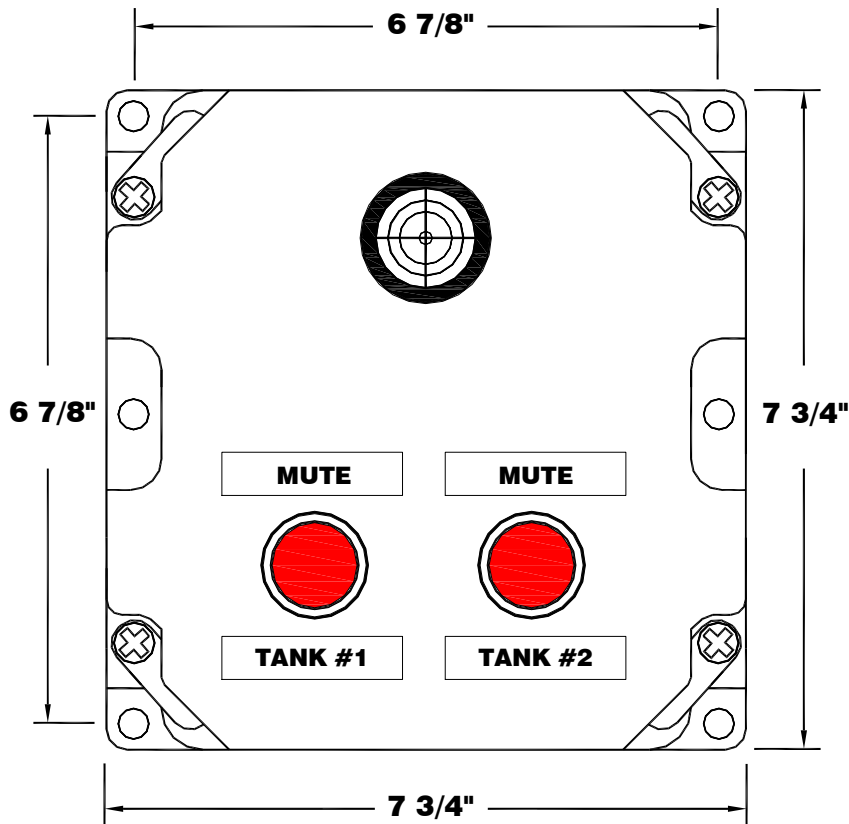

•	•	•	•	•	•	•
1	2	3	4	5	6	7
•	•	•	•	•	•	•

**GROUND
LINE
NEUTRAL
TANK #1
TANK #1
TANK #2
TANK #2**