

## ATE-100 Handheld Pressure Calibrator



LOOK FOR THESE MARKS ON OUR PRODUCTS

### FEATURES

- *Interchangeable pressure and temperature modules*
- *Pressure measurement accuracies of  $\pm 0.025, 0.05$  and  $0.10\%$ , or  $.06/.07\%$*
- *Pressure ranges from  $0.25 \text{ in. H}_2\text{O}$  to  $10,000 \text{ psi}$*
- *Supports most standard RTD probes and thermocouples*
- *Min/max, tare, flow, leak, programmable damping, percent function, trip detect, all standard*
- *High static DP measurement capability*
- *Optional: FM Approval for Class I, Div. 1, Groups A, B, C & D hazardous areas, datalogging, hi/low alarm relays*

The Ashcroft® ATE-100 handheld system introduces a new era in pressure calibration standards. This unique instrument measures pressure, temperature, flow, vacuum, leak, current, voltage and change-of-state for switch testing. A fully equipped ATE-100 system provides all calibration capabilities needed in virtually all pressure measurement and test applications.

Each handheld system consists of a base unit and one or two Quick-Select™ pressure modules. An array of pressure modules is available to cover ranges from  $0.25 \text{ inches H}_2\text{O}$  through  $10,000 \text{ psi}$ . Modules can be inter-changed quickly and easily without the use of tools. In addition to pressure measurement, Quick-Select interface modules are also available to allow the ATE-100 to measure temperature with common RTDs or thermocouple devices.

For the most demanding applications, the ATE-100 can be optionally configured in an intrinsically safe “FM approved” version, for use in Class 1, Div. 1 hazardous environments. In areas where EMI/RFI immunity is required, an optional “CE Mark” version is also available.

With a broad variety of ranges and features, the ATE-100 is one of the most powerful, versatile and useful test and measurement instruments available today.

### The Quick-Select Pressure Module

Quick-Select pressure modules are available in full-scale ranges from  $0.25 \text{ inches H}_2\text{O}$  through  $10,000 \text{ psi}$ . Gauge, vacuum, absolute, differential or compound pressure ranges are available.

Each base unit can accommodate two pressure sensor modules simultaneously. Select from multiple modules which can be interchanged in seconds without the use of tools. When installed in the base unit, a pressure module becomes an integral part of the measurement system, thereby protecting the sensor from damage. Any combination of Quick-Select pressure modules may be used or interchanged as needed in the lab or field.

### The AQS-1 Module

The AQS-1 Quick-Select low pressure module is based on a proprietary, Ashcroft engineered, variable-capacitance sensor. This sensor is available in ranges from  $0/0.25$  to  $0/200 \text{ inches H}_2\text{O}$ . AQS-1 Quick-Select pressure modules are available in accuracies from  $\pm 0.1\%$  to  $\pm 0.06\%$  of span. These Quick-Select pressure modules are available for gauge, differential and compound measurement requirements.

The variable-capacitance sensing element in the AQS-1 incorporates a micro-machined silicon diaphragm. Silicon provides optimum repeatability with minimal hysteresis. The sensor is extremely stable, since the sputtered metal capacitance plates are molecularly bonded to the silicon. This design allows for the elimination of epoxies and other types of bonding and adhesive agents from the sensor assembly.

The AQS-1 sensor is also extremely rugged. It can withstand extreme overpressure without significant error or calibration offset. In addition, the sensor is capable of withstanding significant shock and vibration without damage or loss of measurement output integrity.

### The AQS-2 Module

The AQS-2 Quick-Select pressure module incorporates a piezoresistive, micro-machined silicon sensor. These sensors are available in ranges from  $0/100 \text{ inches H}_2\text{O}$  through  $0/10,000 \text{ psi}$  and are also offered in gauge, absolute, vacuum and compound variants.

## ATE-100 Handheld Pressure Calibrator

316 SS sensor isolation is provided on all AQS-2 modules. AQS-2 Quick-Select pressure modules are available in a variety of accuracies from  $\pm 0.1\%$  of span through  $\pm 0.025\%$  of span.

### Also Measure Temperature

The AQS-RT1, AQS-RT2 and AQS-TC1 interface modules allow the ATE-100 to measure temperature with common RTD or thermocouple temperature measurement devices.

### The Base Units

The base unit provides access to the complete capabilities of the ATE-100 calibration system. These capabilities extend far beyond those of precision pressure measurement. The base unit contains a wide variety of application-specific firmware as well as the ability to measure both current and voltage inputs. In addition, this unit has the ability to interface the system with a computer, data acquisition system or dumb terminal via the standard RS-232 interface.

Each base unit can accommodate two Quick-Select pressure modules simultaneously. In addition, the modules can be interchanged quickly and easily for on-the-fly system configuration as application requirements change.



### PRODUCT SPECIFICATIONS

<b>Ashcroft®</b>									
<b>Model No.:</b>	ATE-100								
<b>Dimensions:</b>	7.88 in. (L) x 4.24 in. (W) x 3.25 in. (H)								
<b>Weight:</b>	Max. 2.2 lbs. w/2 pressure modules installed								
<b>Case Material:</b> High impact ABS									
<b>Sensor Module Capacity:</b> 2 bays for Ashcroft AQS "Quick Select®" sensor modules									
<b>Display:</b>	2 line LCD, 0.37 in. height per line. Can display simultaneous readings from 2 modules								
<b>Electrical Connection:</b> Miniature recessed banana jacks (one set of test leads provided with each ATE-100)									
<b>Operating Temp. Range:</b> Standard: 32° to 120°F Optional: -4 to 120°F									
<b>Storage Temperature:</b> -4° to 158°F									
<b>Update Rate:</b>	130 ms (nominal) with one sensor installed								
<b>Resolution:</b>	$\pm 0.002\%$ of span, 60,000 count (max)								
<b>Warm-Up:</b>	5 minutes for rated accuracy								
<b>Electrical Measurements:</b> 0-20mA or 0-30 Vdc									
<b>Input:</b>	<table border="0"> <tr> <td><b>(volts)</b></td> <td><b>Accuracy</b></td> </tr> <tr> <td>0/10 Vdc</td> <td><math>\pm 0.025\%</math> fs</td> </tr> <tr> <td>0/30 Vdc</td> <td><math>\pm 0.10\%</math> fs</td> </tr> <tr> <td>0-20mA</td> <td><math>\pm 0.03\%</math> fs</td> </tr> </table>	<b>(volts)</b>	<b>Accuracy</b>	0/10 Vdc	$\pm 0.025\%$ fs	0/30 Vdc	$\pm 0.10\%$ fs	0-20mA	$\pm 0.03\%$ fs
<b>(volts)</b>	<b>Accuracy</b>								
0/10 Vdc	$\pm 0.025\%$ fs								
0/30 Vdc	$\pm 0.10\%$ fs								
0-20mA	$\pm 0.03\%$ fs								
<b>Temperature Effect Electrical Measurement:</b> $\pm 0.001\%$ of span per °F over compensated range									
<b>Serial Interface:</b>	Type: RS-232 Baud Rate: 300, 1200, 2400, 9600								
<b>Serial Interface:</b>	Both Quick-Select pressure modules and base unit electronics can be calibrated in the field.								

### OPTIONAL FEATURES

- **Datalogging with Hi-Lo Relay Feature** – Datalogging manually or automatically stores up to 715 measured values for upload to PC. Includes upload utility software. Hi-Lo relay feature allows programming of setpoints for activation of alarms or control valves. (Hi-Lo not available with FM approval.)
- **Enhanced LCD**  
For -4 to 120°F operating range
- **FM Approval** – Class 1, Div. 1, Groups A,B,C & D (Not available with CE Mark)
- **CE Mark**  
EMI/RFI immunity rating (not available with FM approval)

### BASE UNIT PHYSICAL SPECIFICATIONS

<b>Dimensions</b>	
7.88 in. (L) x 4.24 in. (W) x 3.25 in. (H)	
<b>Weight</b>	
Max. 2.2 lbs. w/2 pressure modules installed	
<b>Case Material</b>	
High impact ABS	
<b>Sensor Module Capacity</b>	
2 bays for Ashcroft AQS "Quick Select®" sensor modules	
<b>Display</b>	
2 line LCD, 0.37 in. height per line. Can display simultaneous readings from 2 modules	
<b>Electrical Connection</b>	
Miniature recessed banana jacks (one set of test leads provided with each ATE-100)	

### BASE UNIT OPERATING SPECIFICATIONS

<b>Operating Temperature Range</b>	
Standard: 32° to 120°F Optional: -4 to 120°F	
<b>Storage Temperature</b>	
-4° to 158°F	
<b>Update Rate</b>	
130 ms (nominal) with one sensor installed	
<b>Resolution</b>	
$\pm 0.002\%$ of span, 60,000 count (max)	
<b>Warm-Up</b>	
5 minutes for rated accuracy	
<b>Electrical Measurements</b>	
0-20mA or 0-30 Vdc	
<b>Input (volts)</b>	<b>Accuracy</b>
0/10 Vdc	$\pm 0.025\%$ fs
0/30 Vdc	$\pm 0.10\%$ fs
0-20mA	$\pm 0.03\%$ fs
<b>Temperature Effect Electrical Measurement:</b>	
$\pm 0.001\%$ of span per °F over compensated range	
<b>Serial Interface</b>	
Type: RS-232 Baud Rate: 300, 1200, 2400, 9600	
<b>Serial Interface</b>	
Both Quick-Select pressure modules and base unit electronics can be calibrated in the field.	

### Options

**Datalogging with Hi-Lo Relay Feature** – Datalogging manually or automatically stores up to 715 measured values for upload to PC. Includes upload utility software. Hi-Lo relay feature allows programming of setpoints for activation of alarms or control valves. (Hi-Lo not available with FM approval.)

**Enhanced LCD** – For -4 to 120°F operating range

**FM Approval** – Class 1, Div. 1, Groups A,B,C & D (Not available with CE Mark)

**CE Mark** – EMI/RFI immunity rating (not available with FM approval)

**Power Requirements**

Standard: (2) 9 Vdc Alkaline Batteries (provides up to 30 hours operation per set)

Optional: 110 or 220 Vac transformer to power calibrator from line power

**Certification**

N.I.S.T. Traceable certification document provided for base display unit and sensor modules

## ATE-100 Handheld Pressure Calibrator



### PRESSURE SENSOR MODULE SPECIFICATIONS

#### AQS-1 MODULE

##### Pressure Types

Gauge, differential & compound

##### Available Ranges

(See Chart)

##### Available Accuracies

$\pm 0.06$  (0/1-0/200 in. H<sub>2</sub>O),  $\pm 0.07$  (0/0.25-0/0.5 in. H<sub>2</sub>O) or 0.1% of Span

##### Compensated Temperature Range

20°F to 120°F

##### Temperature Effect

$\pm 0.004\%$  of Span per °F over compensated range (from reference temperature range of 70°  $\pm 3^\circ$ )

##### Repeatability

$\pm 0.01\%$  of span (range 0/1 in. H<sub>2</sub>O or higher)

$\pm 0.02\%$  of span (ranges below 0/1 in. H<sub>2</sub>O)

##### Sensitivity

$\pm 0.002\%$  of span (typical)

##### Media Compatibility

Clean, dry, non-conductive, non-corrosive gas

##### Under/Overpressure Capability

-15 to 50 psi

##### Maximum Static (line) Pressure

100 psi

##### Process Connection

Standard: 1/8 NPT female

##### Other Options

FM Approved (for use with FM approved base unit)

CE Mark (for use with CE Mark rated base unit)

#### AQS-2 MODULE

##### Pressure Types

Gauge, absolute, compound & vacuum

##### Available Ranges

(See Chart)

##### Available Accuracies

$\pm 0.025$ , 0.05 or 0.1 % of Span ( $\pm 0.025$  & 0.05% not available on 0/10,000 psi range)

##### Compensated Temperature Range

20°F to 120°F

##### Temperature Effect

Standard:  $\pm 0.004\%$  of Span per °F over the compensated range (from reference temperature range of 70°  $\pm 3^\circ$ )

Optional: No additional error due to temperature over the compensated range

##### Repeatability

$\pm 0.01\%$  of span

##### Sensitivity

$\pm 0.002\%$  of span (typical)



### Media Compatibility

Any medium compatible with 316 SS isolation.

Optional: Cleaned for Oxygen Service

### Overpressure Capability

200% for ranges up to 1000 psi

150% for ranges over 1000 psi

### Process Connection

Standard: 1/8 NPT female

Optional: 1/8 NPT female with flush port

Welded VCR fitting with standard finish

### Other Options

FM Approved (for use with FM approved base unit)

CE Mark (for use with CE Mark rated base unit)

### TEMPERATURE SENSOR MODULE SPECIFICATIONS

#### AQS-RT MODULE (RTD)

*AQS-RT1 and AQS-RT2 interface modules allow the*

*ATE-100 to measure temperature with an RTD:*

AQS-RT1: Accommodates Pt100, Ni120, Cu120 and other common 2, 3 or 4 wire probes with resistance outputs of 400 ohms or less.

AQS-RT2: Accommodates Pt1000 and other common 2, 3 or 4 wire probes with resistance outputs of 4000 ohms or less.

##### Selectable Units of Measure

°C, °F, °K, °R and ohms

##### Input Receptacle

Accepts TA4F type RTD connector

##### RTD Probes Available

Pt-100 probes, 6" or 12" length, with or without handle. DIN Class A accuracy. Includes mating TA4F connector. Consult factory for details and availability.

##### Options

FM Approved (for use with FM approved base unit)

(CE Mark not available)

#### AQS-TC1 MODULE (Thermocouple)

*The AQS-TC1 interface module allows the ATE-100 to measure temperature with a thermocouple:*

##### Compatibility

Programmed to provide direct temperature readout from types J, K, T, E, R, S, B & N thermocouples or direct millivolt readout from any thermocouple.

##### Reference Junction

Automatic internal or manual external

##### Resolution

Automatic or manually selectable, up to .01°

##### Units of Measure

Selectable; °C, °F, °K, °R and millivolts

##### Receptacle

Accepts "miniature thermocouple connector", Omega® type SMP


##### Options

FM Approved (for use with FM approved base unit)

(CE Mark not available)

# ATE-100 Handheld Pressure Calibrator

## DIMENSIONS

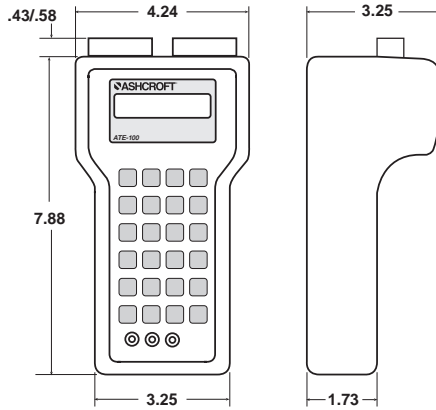

## STANDARD RANGES

AQS-2 psi (gauge & absolute pressure)	AQS-1 H <sub>2</sub> O (gauge/differential pressure)	Other Engineering Units**
5	0.25*	psi in. H <sub>2</sub> O in. Hg ftSW Bar mBar kPa mPa mmHg cmH <sub>2</sub> O mmH <sub>2</sub> O kg/cm <sup>2</sup> User Selectable
10	0.5*	
15	1.0*	
20	2.0*	
25	3.0*	
30	5.0*	
50	10*	
60	15*	
100	25*	
150	50*	
200	100*	
250	150*	
300	200*	
500		
600		
1000		
1500		
2000		
2500		
3000		
5000		
6000		
7500		
10,000		
<b>vacuum</b>		**Note: Engineering units identified above are accessible through the unit select feature. However, readout will default to the primary unit of measure on start-up. Sensor modules scaled in primary units other than in. H <sub>2</sub> O (HQS-1) or psi (HQS-2) are also available. Consult factory.
5		
10		
15		
<b>compound</b>		
±5	±0.125*	
±10	±0.25*	
±15	±0.5*	
-15/+30	±1.0*	
-15/+60	±1.5*	
	±2.5*	
	±5.0*	
	±7.5*	
	±12.5*	
	±25*	
	±50*	
	±75*	
	±100*	

\* Non-isolated, for clean dry gas only

## ACCESSORIES

### POWER SUPPLIES

- 831X016-01 AC adapter to run system off line power (110 Vac, 60 Hz)
- 831X016-02 AC adapter to run system off line power (100 Vac, 60 Hz)
- 831X016-03 AC adapter to run system off line power (220 Vac, 50 Hz)
- 831X019-01 AC adapter to run system off line power (220 Vac, 50 Hz, for CE mark)

### ELECTRICAL ACCESSORIES

- LPSIIa Loop Power Supply (powers 4-20mA current loops)
- SM-1 Voltage Adapter (Converts voltages of 10/250 Vac and 10/400 Vdc to levels acceptable to calibrator electronics; used to test "live" switches)

### CARRYING, TRANSPORT & PROTECTIVE CASES

- 864X071-01 Contoured Form-Fitting Protective Instrument Case with Shoulder Strap
- 864X068-01 Heavy Duty, Watertight, Instrument Carrying/Transport Case\*
- 864X069-01 Soft Carrying Case\*

\*Holds base unit, 5 sensors and tools

## HOW TO ORDER

### Base Display Unit

- 1) Specify Model: ATE-100
- 2) Specify Options: (Datalogging, Enhanced LCD, FM Approval, CE Mark)

### Sensor Modules

- 3) Type (AQS-1 or AQS-2)
- 4) Pressure Range and Unit of Measure (see range chart)
- 5) Pressure Type (see specifications)
- 6) Accuracy (see specifications)
- 7) Specify Options
  - a) "zero temperature error over compensated range" (HQS-2 only)
  - b) Optional fitting (see specifications)
  - c) Clean for Oxygen Service (AQS-2 only)
  - d) FM approval or CE Mark

### Temperature Interface Module

- 8) Type (AQS-RT1, AQS-RT2 or AQS-TC1)
  - a) Specify FM approval if required
- 9) RTD Probe Type (when required. Consult factory for probe P/N)

### Accessories

- 10) Specify required accessories