



Front Cable Exit Option

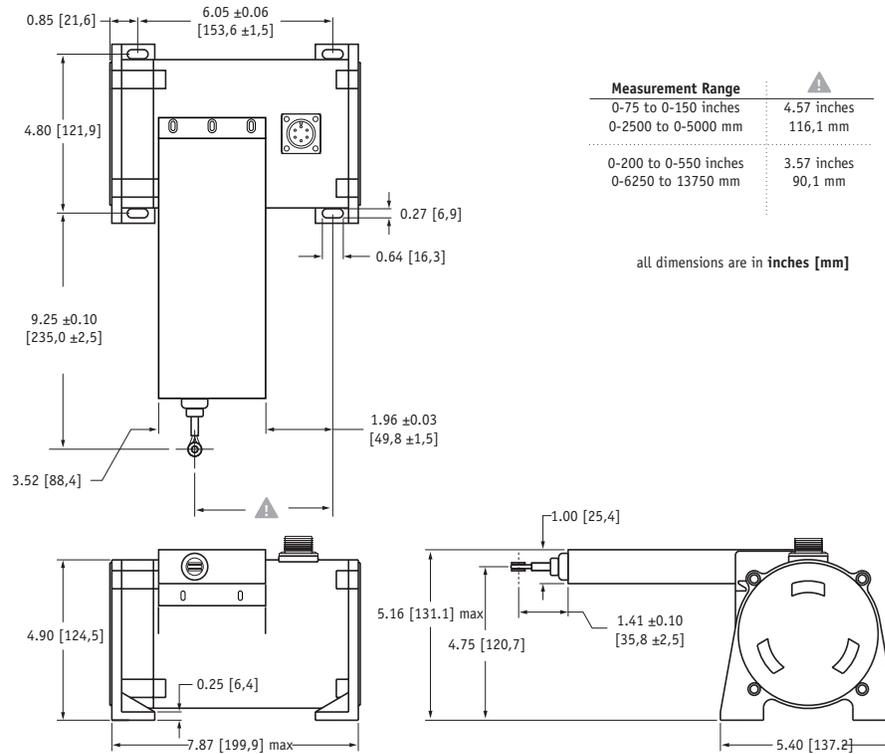


Note: Dimensions not valid for "increased cable tension" option. Consult factory for dimensions.

Top Cable Exit Option

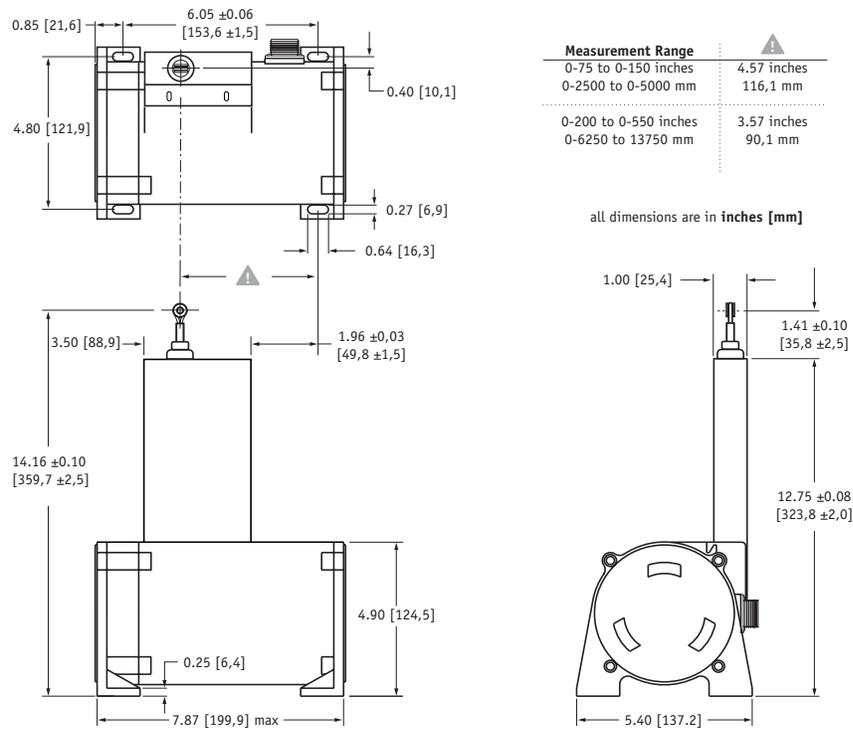


Note: Dimensions not valid for "increased cable tension" option. Consult factory for dimensions.

Rear Cable Exit Option

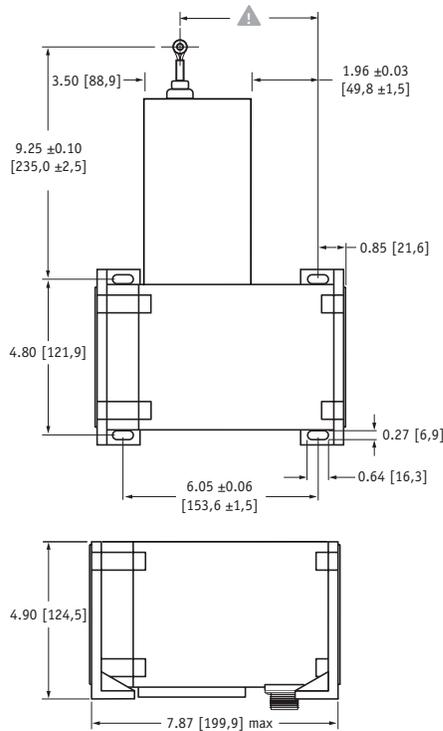


| Measurement Range | Δ |
|-----------------------|-------------|
| 0-75 to 0-150 inches | 4.57 inches |
| 0-2500 to 0-5000 mm | 116,1 mm |
| 0-200 to 0-550 inches | 3.57 inches |
| 0-6250 to 13750 mm | 90,1 mm |

all dimensions are in inches [mm]

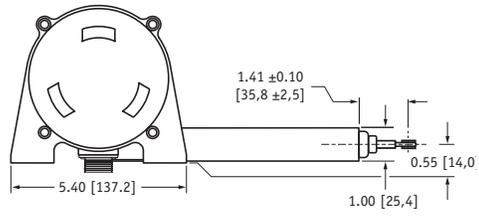

Note: Dimensions not valid for "increased cable tension" option. Consult factory for dimensions.



Bottom Cable Exit Option

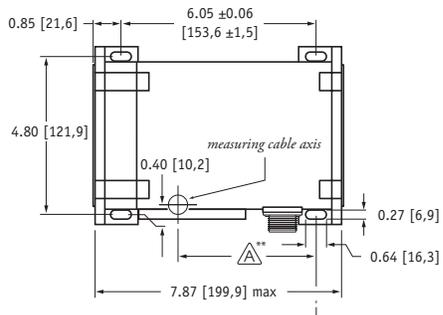

**Note: see "A" dimension on PT9000 outline drawing

| Measurement Range | Δ |
|-----------------------|-------------|
| 0-75 to 0-150 inches | 4.57 inches |
| 0-2500 to 0-5000 mm | 116,1 mm |
| 0-200 to 0-550 inches | 3.57 inches |
| 0-6250 to 13750 mm | 90,1 mm |

all dimensions are in inches [mm]

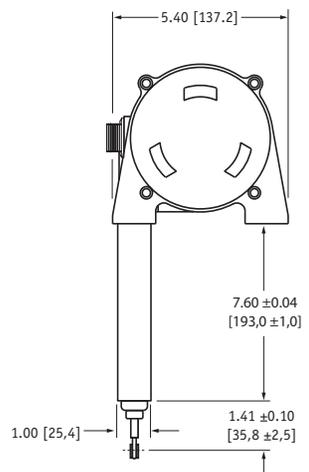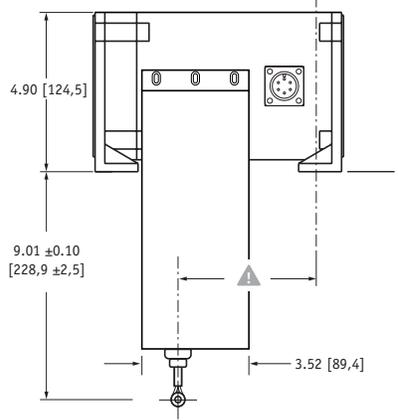

Note: Dimensions not valid for "increased cable tension" option. Consult factory for dimensions.
version: 1.0 last updated: March 30, 2005