


Power Cord for KISTLER equipment

2-core cable suitable for KISTLER equipment (Protective Class II) introduced before September 1979. Temperature range $-5 \dots 70^{\circ}\text{C}$

1505


Euro plug

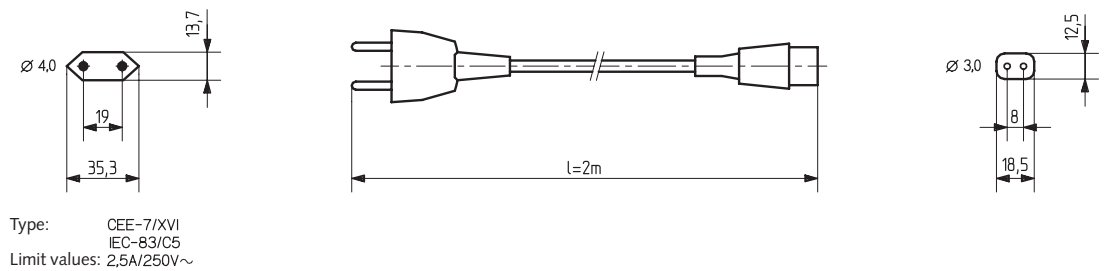

2-core cable suitable for KISTLER equipment (Protective Class II) introduced after September 1979. Temperature range $-5 \dots 70^{\circ}\text{C}$


1503

Euro plug

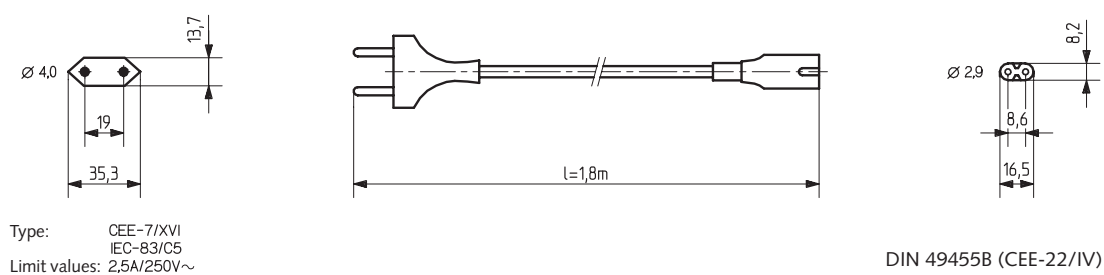

1504

USA plug

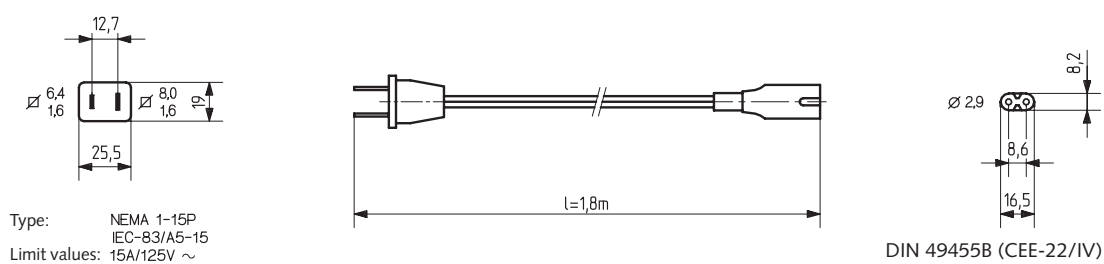


000-350e-12.01 (DB15.017e)

2-core power cord with equipment grounding conductor



Temperature range $-5 \dots 70^{\circ}\text{C}$

1507

Switzerland




Type: SEV Typ12
Limit values: 10A/250V~


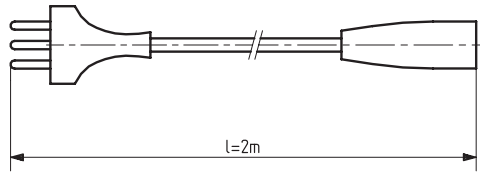


1508

e.g.
USA, Japan, etc.




Type: NEMA 5-15P
IEC-83/A5-15
Limit values: 15A/125V ~


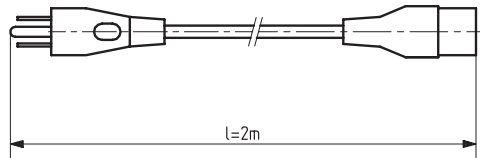


1509

e.g.
Germany,
France,
Spain etc.




Type: CEE-7/VII
IEC-83/C4
Limit values: 16A/250V ~


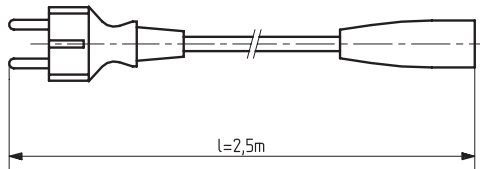


1515A4

e.g.
Argentina,
New Zealand,
Australia




Type: ASC 112
Limit values: 10A/250V ~


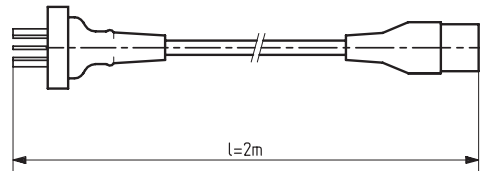


1515A5

e.g.
GB, India,
Hong Kong,
Malta etc.




Type: BS 1363 A
IEC-83/B2
Limit values: 13A/250V ~


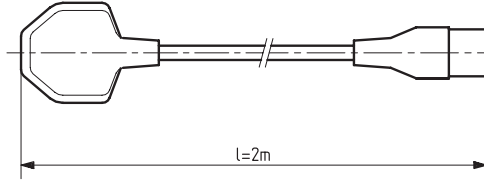


1515A6

e.g.
South Africa etc.




Type: SABS 164
Limit values: 16A/250V ~


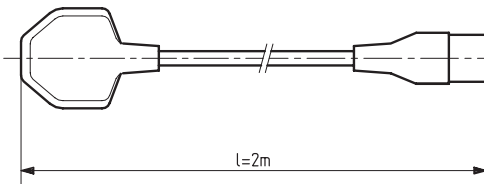


1515A7

Denmark




Type: DK
Limit values: 10A/250V ~

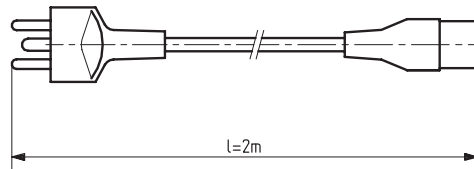

1515A8

e.g.
Chile, Italy etc.



Type: CEI-23-16
Limit values: 10A/250V ~

