



API 7500 G

DC to Frequency Transmitter, Isolated

Field Selectable
One Minute Setup!



Input: 0-50 mV to ± 10 VDC, 0-1 mA to 4-20 mADC
Output: 0-100 Hz to 0-30 kHz MOSFET or TTL

- 24 Selectable Inputs & 30 Selectable Outputs
- Setup via Rotary Switches & Easy-to-use Tables
- 2000 V Full Isolation Input/Output/Power
- Adjustable Low Frequency Cutout
- Input and Output LoopTracker® LEDs
- Functional Test Pushbutton

Applications

- Analog to Frequency for Totalizers & Counters
- Use With API 7010 G for Remote Monitoring

Specifications

Input Ranges

Voltage: 0-50 mVDC to ± 10 VDC

Current: 0-1 mADC to 0-20 mADC including 4-20 mA

Consult factory for other ranges

System voltages must not exceed socket voltage rating

Input Impedance

Voltage: 1 M Ω minimum

Current: 50 Ω typical

Input Loop Power Supply

18 VDC nom., unregulated, 25 mADC, max. ripple, less than 1.5 V_{p-p}

LoopTracker®

Variable brightness LEDs indicate input/output loop level and status

Output Ranges

	Minimum	Maximum	Range Increments
Low range:	0-100 Hz	0-1500 Hz	100 Hz
High range:	0-2 kHz	0-30 kHz	2 kHz

Output Driver

Open drain MOSFET, 24 VDC maximum

I_{sink} 50 mA maximum

V_{on} 0.6 V maximum at 50 mA I_{sink}

Optional 9 V_{p-p} TTL output, specify M02 option

Output Linearity

Better than $\pm 0.4\%$ of span

Cutout Control

Disables output when input falls below preset level. Adjustable from 2% to 25% of range using top accessible, multi-turn potentiometer.

Output Zero and Span

Multiturn potentiometers to compensate for load and lead variations $\pm 15\%$ of span adjustment range typical

Functional Test Button

Sets output to test level when pressed. Potentiometer factory set to approximately 50% of span, adjustable 2% to 100% of span

Response Time

70 milliseconds typical, consult factory for faster response times

Isolation

2000 V_{RMS} minimum

Full isolation: power to input, power to output, input to output

Ambient Temperature Range

-10°C to +60°C operating

Temperature Stability



Better than $\pm 0.02\%$ of span per °C

Power

Standard: 115 VAC $\pm 10\%$, 50/60 Hz, 2.5 W max.

A230 option: 230 VAC $\pm 10\%$, 50/60 Hz, 2.5 W max.

D option: 9-30 VDC, 1.5 W typical

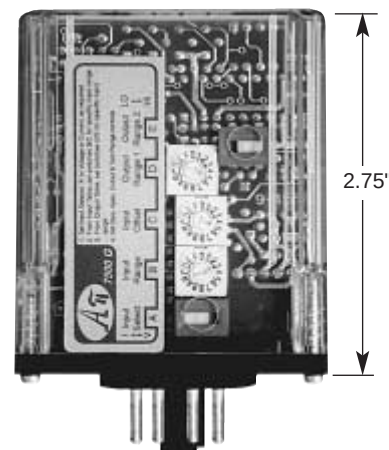

Free Factory
Input & Output
Calibration!

Models and Options

API 7500 G Field rangeable DC to frequency transmitter, isolated, with loop power supply, 115 VAC

Options—Specify on Order

A230 Powered by 230 VAC, 50/60 Hz

D Powered by 9-30 VDC


M02 TTL 9 V_{p-p} powered output instead of MOSFET output

U Conformal coating for moisture resistance

Accessories—See other side

Electrical Connections

Order API 008 or API 008 FS socket separately

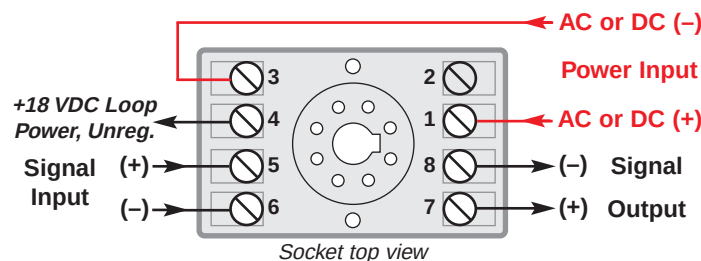

ABSOLUTE PROCESS INSTRUMENTS, Inc.
 1220 American Way
 Libertyville, IL 60048
 USA
www.api-usa.com

Phone: 800-942-0315
 847-918-3510
 Fax: 800-949-7502
 847-968-4891

API 7500 G Frequency to DC Transmitter

FUNCTIONAL DESCRIPTION

The API 7500 G accepts a DC voltage or current input and provides an optically isolated frequency output that is directly proportional to the input.

Common applications include pulse counting or totalization of DC process signals from devices such as flow transmitters, analog signal transmission over long lines such as telephone wires, or analog inputs into PLCs that accept only discreet inputs.

The optical isolation between input and output makes this module useful for ground loop elimination, common mode signal rejection or noise pickup reduction. The API 7500 G uses the latest technology in linear optical isolation for optimum noise immunity and complete freedom from AC artifacts in the output. In addition, the module power supply is isolated, resulting in full 3-way (input, output, power) isolation.

Standard power is 115 VAC. Options include 230 VAC or 9-30 VDC.

The API 7500 G has an open drain MOSFET (open collector) output which requires a user supplied external power supply and pull-up resistor allowing the module to be interfaced with a wide variety of devices. For a 9 V_{p-p} powered output, refer to model API 7500 G M02.

A low frequency cutout potentiometer can be adjusted to disable the output when the input falls below a pre-determined level.

The API 7500 G distinguishes itself from other similar products in that both its input and output can be field-configured without opening the case via external rotary and slide switches. The more common ranges can be selected from the table on the module, however, virtually unlimited combinations are possible. Consult the factory for assistance with special ranges.

The API 7500 G plugs into an industry standard 8-pin socket sold separately. Sockets API 008 and finger-safe API 008 FS allow either DIN rail or panel mounting.

UNIQUE FEATURES

API exclusive features include two **LoopTracker**® LEDs and a **Functional Test Pushbutton**. The LoopTracker LEDs (Green for input, Red for output) vary in intensity with changes in the frequency input signal. Monitoring the state of these LEDs can provide a quick visual picture of your process loop at all times.

The functional test pushbutton provides a fixed output (independent of the input) when held depressed. The test output level can be field-adjusted via a multiturn potentiometer.

Both the LoopTracker LEDs and functional test pushbutton greatly aid in saving time during initial startup and/or troubleshooting.

An 18 VDC unregulated loop excitation power supply is standard and can be used to power passive input devices.

OPERATION

The API 7500 G input select slide switch determines the input impedance for the module, typically 50 Ω for current inputs and 1 MΩ or greater for voltage inputs.

Depending on the Input Range and Input Offset switch positions, the input is filtered, either amplified or attenuated as required, then passed through an optical isolation circuit to the output stage.

The Output Range 1 and Output Range 2 switches determine the exact frequency available to the user.

RELATED PRODUCTS

The following products are also available. Refer to the appropriate data sheets for details.

API 7500 G M02

Same as API 7500 G, but 9 V_{p-p} powered output.

API 7500 G SS

Same as API 7500 G, but low frequency outputs.

API 7580 G



Frequency to DC isolating transmitter

ACCESSORIES

API 008 8-pin socket

API 008 FS 8-pin finger safe socket

API TK36 DIN rail, 35 mm W x 39" L, aluminum

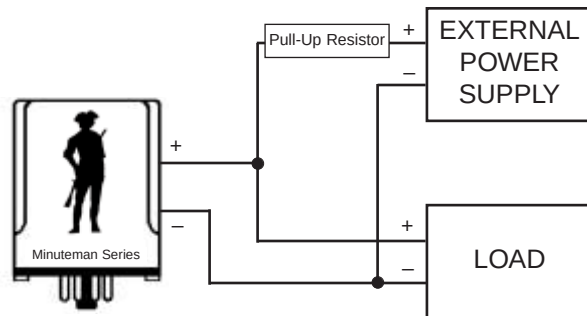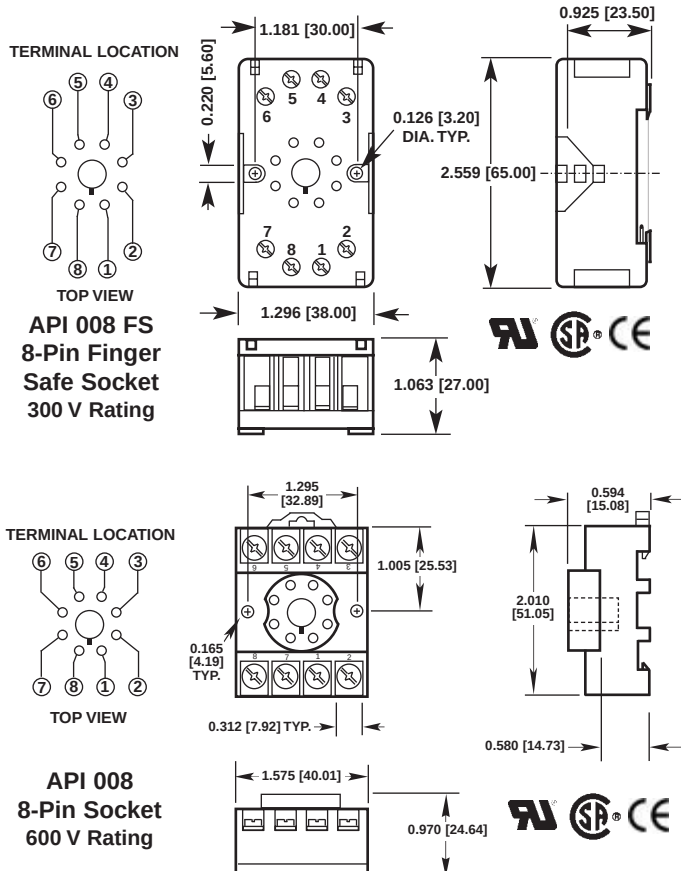

The API 7500 G has an open drain MOSFET (open collector) output, requiring a user supplied external power supply and pull-up resistor.

API maintains a constant effort to upgrade and improve its products. Specifications are subject to change without notice. Consult factory for your specific requirements.

ABSOLUTE PROCESS INSTRUMENTS, Inc.
Phone: 800-942-0315 Fax: 800-949-7502
www.api-usa.com