

IT-677 – 24" (1920 x 1080 Full HD)

NO. DS200640360103 | EN
2014 | V 01.02.00



IT-677 – 24" (1920 x 1080 Full HD)

Highlights

- Digital image transfer (best image quality without time-consuming adjustments)
- Driverless data transfer (plug & play)
- State-of-the-art, energy-saving LED backlighting technology, with optional touch screen
- Rugged design, IP66 (front side)
- Ready-to-use without any additional enclosure
- Many enclosure and mounting options

Ingress protection

Front side IP66, back side IP20


Description

The IT-677 with 24" widescreen monitor and Full HD (1920 x 1080) resolution is today's trend-setting solution, and suitable for industrial applications in the process industry.

The high bright 24" monitor displays perfect process images point-to-point from the PC, in 1920 x 1080 Full HD resolution, and 16:10 aspect ratio – up until now, this is the most sought-after display size in the process industry. Designed as a control panel module, the monitor can easily be front-mounted into stainless steel enclosures or walls; alternatively, it can be rear-mounted without front plate into third-party enclosures.

The standard IT-677 version comes without touch screen, but is also available with intuitive glass or foil touch screen. All displays are lead-, cadmium-, and mercury-free – we take GREEN TECHNOLOGY seriously. For keyboard operation, a plastic-coated Windows keyboard with integrated pointing device is available, e.g. trackball, joystick, touch pad or mouse, which can be operated with one or two hands.

Operating Principle

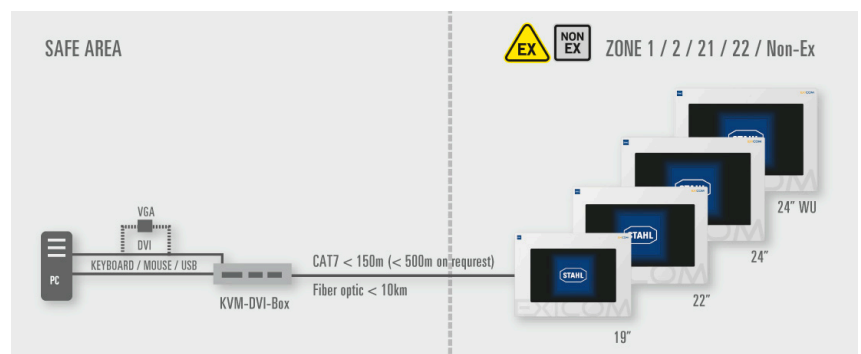

IT-677 – 24" (1920 x 1080 Full HD)

NO. DS200640360103 | EN
2014 | V 01.02.00



Technical Data

Mounting design	Front panel mounting
Display	61 cm (24") TFT color display 16.7 million colors Full HD 1920 x 1080 Aspect ratio 16:9 Brightness 300 cd/m ² Contrast 1000:1 5 wire resistive touch screen optional
Backlighting	LED technology Service life 50,000 h at +20 °C
Display function keys	-
External keyboard	107 keys, incl. trackball / joystick / mouse / touch pad
Data transfer / cable length	KVM box: DVI 2 (up to 1680 x 1050) Copper: up to 500 m (1640 ft) KVM box: DVI 3 (up to 1920 x 1200) Copper: up to 150 m (492 ft) LWL: Multi mode up to 500 m (1640 ft) LWL: Single mode up to 10,000 m (33,000 ft)
Interfaces	1 x Ethernet 10/100BaseTx or LWL 100BaseFx, 100 Mbit 2 x USB (hub) 1 x USB (root) 2 x USB (keyboard, pointing device) 1 x RS-232 Optional interfaces 1 x Reader box for card readers / barcode scanners 1 x FBAS Ex nA (video) 1 x Audio line out WLAN via USB
Dimensions (W x H x D)	660 x 475 x 110 mm (23.62 x 18.7 x 4.33")
Wall section	615 x 435 (+/- 0.5) mm (24.21 x 17.1 (+/- 0.02)")
Mounting position	horizontal / vertical
Weight	16 kg (35.2 lbs)
Power supply	24 VDC (max. = 3 A) 100 - 240 VAC (max. = 1 A)
Permissible ambient temperature ranges	Operation -20 °C up to +60 °C Operation with heater * -30 °C up to +50 °C (option) Storage -30 °C up to +70 °C * The heater has to be designed to ensure that the temperature inside the enclosure of the operating unit does not fall below -20 °C (-30 °C only at the front side)
Heat dissipation	approx. 40 % through front side, approx. 60 % through back side
Relative humidity	10 up to 90 % at +40 °C, non condensing
Material front side	Aluminum front plate, glass, optional glass touch screen or polyester touch screen
Material back side	Galvanized sheet steel
Ingress protection	Front side IP66, back side IP20