

# Analog Output Module HART Ex i / I.S. Outputs, 8 Channels for Zone 1 Series 9466/12



www.stahl.de



- > 8 channels for controlling HART control valves and positioners
- > Intrinsically safe outputs Ex ia IIC
- > Galvanic separation between outputs and system
- > Open-circuit and short-circuit monitoring for each field circuit
- > Module can be replaced in operation (hot swap)
- > New version: Type 9468/32



02007E00

A4

The Analog Output Module HART is used for the connection of up to 8 HART capable positioners or control valves with 0 ... 20 mA or 4 ... 20 mA signals. All outputs are intrinsically safe and short-circuit proof. Each output is individually monitored for open and short circuits.

The integrated HART multiplexer allows bidirectional HART communication between HART field devices and the automation and engineering system.

The interface of the Analog Output Module HART with the internal data bus of the BusRail is designed with redundancy. Analog (non-HART) control valves and positioners can also be operated.



	ATEX / IECEx						NEC 505						NEC 506						NEC 500								
	0	1	2	20	21	22	Class I						Class II						Class III								
Zone	0	1	2	20	21	22	Zone	0	1	2	20	21	22	Division	1	2	1	2	1	2	Division	1	2	1	2	1	2
Ex interface	x	x	x	x	x	x	Ex interface	x	x	x	x	x	x	Ex interface	x	x	x	x	x	x	Ex interface	x	x	x	x	x	x
Installation in		x	x		x <sup>*)</sup>	x <sup>*)</sup>	Installation in		x	x		x <sup>*)</sup>	x <sup>*)</sup>	Installation in	x	x	x <sup>*)</sup>	x <sup>*)</sup>	x <sup>*)</sup>	x <sup>*)</sup>	Installation in	x	x	x <sup>*)</sup>	x <sup>*)</sup>	x <sup>*)</sup>	x <sup>*)</sup>

<sup>\*)</sup> Restrictions see table explosion protection

WebCode 9466A

# Analog Output Module HART Ex i / I.S. Outputs, 8 Channels for Zone 1

## Series 9466/12



### Selection Table

Version	Description	Order number	Weight kg / lbs
Analog Output Module HART	8 channels for controlling HART control valves and positioners	9466 / 12-08-11	0.304 / 0.670
Note	Please order terminal separately - see Accessories		

### Explosion Protection

Global (IECEx)	
Gas	PTB 06.0001X Ex ib [ia] IIC/IIB T4
Europe (ATEX)	
Gas and dust	PTB 99 ATEX 2207 ⊕ II 2 (1) G Ex ib [ia] IIC T4 ⊕ II (1) D [Ex ia] IIIC
Certifications and certificates	
Certificates	IECEx, ATEX, Brazil (Inmetro), Canada (CSA), Kazakhstan (GOST K), Russia (GOST R), Serbia (SRPS), USA (FM), Belarus (operating authorisation)
Ship approval	ABS, BV, ClassNK, DNV, GL, LR, RS

### Safety data

Maximum values for	
Max. voltage $U_o / V_{oc}$	26.2 V
Max. current $I_o / I_{sc}$	86 mA
Max. power $P_o$	561 mW
Cable parameters (ATEX) (for inductive or capacitive circuits)	
Max. connectable capacitance $C_o / C_a$	
IIC	97 nF
IIB	0.75 $\mu$ F
Max. connectable inductance $L_o / L_a$	
IIC	2.71 mH
IIB	15.8 mH
Max. internal capacity $C_i$	0
Max. internal inductance $L_i$	0
Further information	see respective certificate

### Technical Data

Electrical data	
Ex-i / I.S. outputs	
Number of channels	8
Signal	
Signal range	0 ... 20 mA, 4 ... 20 mA + HART (adjustable parameters for each channel)
Minimum signal	0 mA
Maximum signal	21.8 mA
Maximum load resistance	750 / 700 $\Omega$ (at 20 mA / 21.8 mA)
Resolution in the range	14 Bit at 0 ... 21.8 mA
Maximum delay from internal bus to outputs	5 ms
Galvanic separation	
between power supply and system components	1500 V AC
between two input / output modules	500 V AC
between inputs and system components	500 V AC
The inputs and outputs of an I/O module have a common negative conductor.	



# Analog Output Module HART Ex i / I.S. Outputs, 8 Channels for Zone 1 Series 9466/12



## Technical Data

### Electrical data

Accuracy of measurement	
Note	All values in % of the signal span, at 23 °C / 73.4 °F
Measurement deviation	0.06 %
Ambient temperature influence	0.06 % / 10 K
Settings	
Open-circuit and short-circuit monitoring	ON, OFF (for each channel)
Safety position	
Output when communication error	-10 %, 0 %, 100 %, 110 % of the signal, hold last value (adjustable parameters)
Stop time to safety position	0, 1, 2, .. 254, 255 (x 100 ms) (adjustable parameters)
Diagnostics	
Retrievable parameters	Manufacturer, type, version, serial number
Module faults	<ul style="list-style-type: none"> <li>• Internal primary bus faults</li> <li>• Internal redundant bus faults</li> <li>• No response</li> <li>• Module does not correspond to configuration</li> <li>• Hardware fault</li> </ul>
Signal errors for each channel	
Open circuit	Output voltage > 16 V
Short circuit	Output load < 50 Ω
Operator interface	
Operation	LED green "RUN"
Fault	LED red "ERR"
Auxiliary power	
Maximum power consumption	6.1 W (8 channels at 20 mA)
Maximum power dissipation	4.5 W (8 channels at 20 mA and 500 Ω)
Electrical connection	
Ex i field signals	Plug-in terminals 16-pole with catch, 2.5 mm <sup>2</sup> / up to 14 AWG, screw or spring type
Connection diagram	

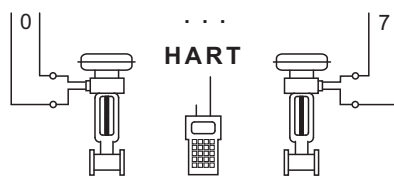

05688E00

### Ambient conditions

Ambient temperature	-20 ... +65 °C / -4 ... +149 °F
Storage temperature	-40 ... +70 °C / -40 ... +158 °F
Maximum relative humidity	95 % (no condensation)
Sinusoidal vibration (IEC EN 60068-2-6)	1 g in frequency range between 10 ... 500 Hz 2 g in frequency range 45 ... 100 Hz
Semi-sinusoidal shock (IEC EN 60068-2-27)	15 g (3 shocks per axis and direction)
Electromagnetic compatibility	Tested according to the following standards and regulations: EN 61326-1 (1998) IEC 1000-4-1...6, NAMUR NE 21

### Mechanical data

Module enclosure	Polyamide 6GF
Fire resistance (UL 94)	V2

# Analog Output Module HART Ex i / I.S. Outputs, 8 Channels for Zone 1

## Series 9466/12



### Technical Data







#### Mechanical data

Degree of protection (IEC 60529)	
Modules	IP30
Connections	IP20


#### Mounting / installation

Installation conditions	
Mounting type	on 35 mm DIN rail NS 35/15
Mounting orientation	horizontal and vertical

### Accessories and Spare Parts

Designation	Figure	Description	Art. no.
Plug-in terminal		2.5 mm <sup>2</sup> / 14 AWG with catch, 16-pole, screw connection, blue, for connecting the field signals to I/O modules, for intrinsically safe field circuits Designation: 1 ... 16 Attention: An additional terminal is necessary for I/O module Series 9470 and 9480. Designation: 17 ... 32	<b>162702</b>
		2.5 mm <sup>2</sup> / 14 AWG with catch, 16-pole, spring connection, blue, for connecting the field signals to I/O modules, for intrinsically safe field circuits including test jacks Designation: 1 ... 16 Attention: An additional terminal is necessary for I/O module Series 9470 and 9480. Designation: 17 ... 32	<b>162695</b>
Labelling strips		"FB Addr ... Mod No ..." for pluggable terminal, sheet with 26 strips	<b>162788</b>
Designation strips		For BusRail, for 1 BusRail with 16 I/O modules	<b>162793</b>
Warning sign		"Clean modules only with a damp cloth."	<b>162796</b>
Partition		For assembly between intrinsically safe and non-intrinsically safe connectors of the I/O modules, in order to adhere to the required 50 mm / 2 in distance	<b>162740</b>

### Dimensional Drawings (All Dimensions in mm / inches) - Subject to Alterations

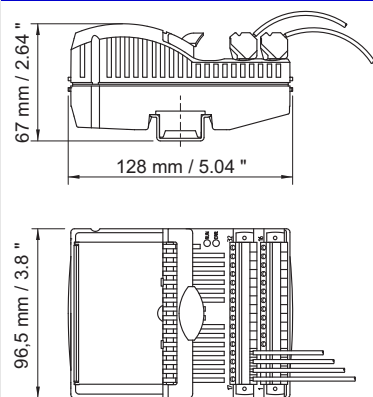

09879E00

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.