DeviceNET®
Ranges: 0-90º to 0-50 Turns
Industrial Grade

RT9DN

Specification Summary:

GENERAL

Full Stroke Ranges	0-0.25 to 0-50 turns
Electrial Interface	CANbus ISO 11898
Protocol	DeviceNet Version 2.0
Accuracy	± 0.30 to 0.15% full stroke
Repeatability	± 0.02% full stroke
Resolution	± 0.003% full stroke
Enclosure Material	powder-painted aluminum or stainless steel
Sensor	plastic-hybrid precision potentiometer
Shaft Loading	up to 35 lbs. radial and 5 lbs. axial
Weight, Aluminum (Stainless Steel) Enclosure	5 lbs. (10 lbs.), max.

ELECTRICAL

Input Voltage	Bus Powered
Input Current	40 mA
Address Setting (Node ID)	0..63 set via DIP Switches—*default setting: 63*
Baud Rate	125K, 250K or 500K set via DIP Switches
EDS file	available @ http://www.celesco.com/download

ENVIRONMENTAL


Enviromental Suitability	NEMA 4/4X/6, IP67/68
Operating Temperature	-40º to 200ºF
Vibration	up to 10 G's to 2000 Hz maximum



Celesco's model RT9DN communicates rotational position feedback via DeviceNET® to your programmable controller. The heart of this sensor is a precision plastic-hybrid position potentiometer which provides a "absolute" position and does not ever have to be reset to a "home" position after a power loss or planned shutdown.

This innovative sensor from Celesco, designed to meet tough NEMA-4 and IP67 environmental standards, is available in full-stroke measurement ranges of 1/4 to 50 turns.


Outline Drawing

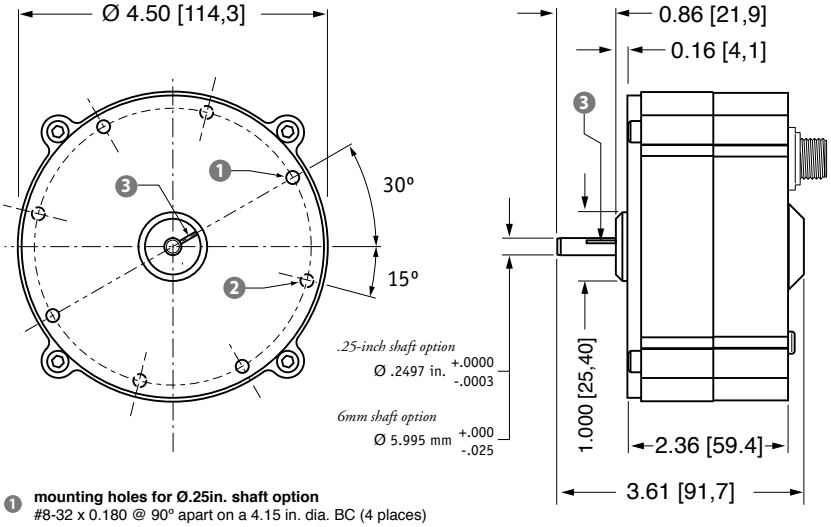

1. **mounting holes for Ø.25in. shaft option**
   #8-32 x 0.180 @ 90º apart on a 4.15 in. dia. BC (4 places)
2. **mounting holes for Ø 6mm shaft option**
   M4 x 4.5mm @ 90º apart on a 105.4 mm dia. BC (4 places)
3. **reference mark**
   full counter-clockwise position - align mark on shaft to mark on face for start of measurement range


ALL DIMENSIONS ARE IN INCHES [MM]

Output Signal

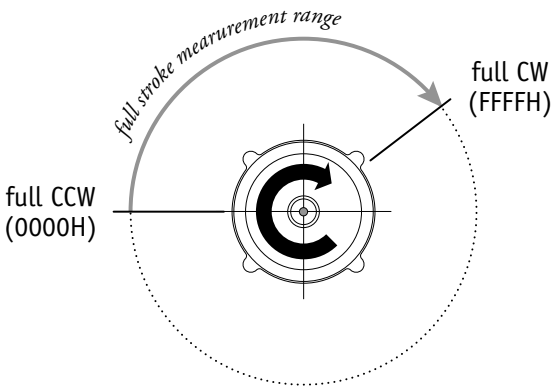


I/O Format:

Data Frame

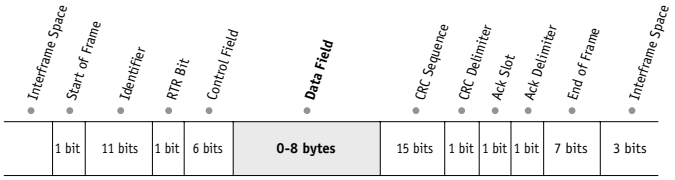

Data Field

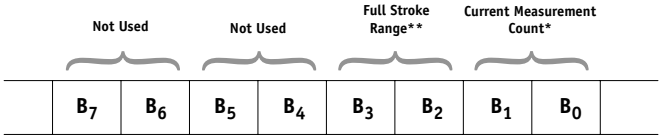

B_0 = LSB current measurement byte
B_1 = MSB current measurement byte
B_2 = LSB full stroke range byte
B_3 = MSB full stroke range byte
B_4 - B_7 = not used

***Current Measurement Count**

The **C**urrent **M**easurement **C**ount (**CMC**) is the output data that indicates the present position of the measuring cable.

The CMC is a 16-bit value that occupies the first two bytes (B_0 and B_1) of the data field. B_0 is the LSB (least significant byte) and B_1 is the MSB (most significant byte).

The CMC starts at 0000H with shaft at the full counter-clockwise position (0° reference mark) and continues in the clockwise direction to the end of the stroke range stopping at FFFFH. This holds true for all ranges.

****Full Stroke Range**

The **F**ull **S**troke **R**ange **(FSR)** is a 16-bit value in the data field that expresses the full range of the sensor in degrees. This value can be used to convert the actual count to units of measurement should the application require it.

The full stroke measurement range occupies the second two bytes (B_2 and B_3) of the data field.

B_2 is the LSB (least significant byte) and B_3 is the MSB (most significant byte).

This value is expressed in degrees.

Example:

Hex Value	*Decimal Equivalent*	*Full Stroke Range*
0168	360	360 degrees

Converting CMC to Degrees

If required, the CMC can easily be converted to a rotational measurement expressed in degrees instead of counts.

This is accomplished by first dividing the CMC by 65,535 (total counts over the range) and then multiplying that value by the FSR:

$$\left(\frac{\text{CMC}}{65{,}535} \right) \times \text{FSR}$$

Example:

If the full stroke range is **1 turn (360 degrees)** and the current position is **OFF2 Hex** (4082 Decimal) then,

$$\left(\frac{4082}{65{,}535} \right) \times 360 \text{ deg.} = 22.4 \text{ degrees}$$

Address Setting (Node ID), Baud Rate and Bus Termination Settings

Address Setting (Node ID)

The Address Setting (Node ID) is set via 6 switches located on the 8-pole DIP switch found on the DeviceNET controller board located inside the transducer.

The DIP switch settings are binary starting with switch number **1** (= 2^0) and ending with switch number **6** (= 2^5).

DIP-1 (2^0)	DIP-2 (2^1)	DIP-3 (2^2)	DIP-4 (2^3)	DIP-5 (2^4)	DIP-6 (2^5)	*address* (decimal)
0	0	0	0	0	0	0
1	0	0	0	0	0	1
0	1	0	0	0	0	2
…	…	…	…	…	…	…
1	1	1	1	1	1	63



Baud Rate

The transmission baud rate may be either factory preset at the time of order or set manually at the time of installation.

The baud rate can be set using switches **7** & **8** on the 8-pole DIP switch found on the DeviceNET controller board located inside the transducer.


DIP-7	DIP-8	baud rate
0	0	125k
1	0	250k
0	1	500k
1	1	125k




Bus Termination

The setting of the internal bus termination resistor may be specified upon order or manually changed by the end user at the time of installation.


The bus termination resistor is activated setting switches **1** & **2** on the 2-pole DIP switch (located on the internal DeviceNET controller board) to the "ON" position.



DeviceNET Controller Board and DIP Switch Location



to gain access to the controller board, remove four Allen-Head Screws and separate case halves

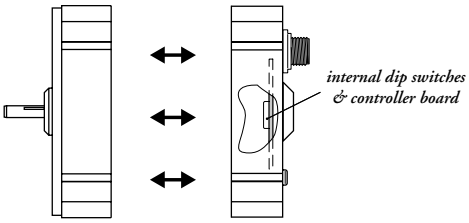

Ordering Information:

Model Number:

RT9DN - _____ - ___ - ___ - ___ - ___ - ___ - ___
order code: ® Ⓐ Ⓑ Ⓒ Ⓓ Ⓔ

Sample Model Number:

RT9DN - 30 - AL - 25 - 500 - TR - SC5

®	range:	30 turns
Ⓐ	enclosure:	powder-painted aluminum
Ⓑ	shaft:	.25-in diameter
Ⓒ	baud rate:	500 k bits/sec.
Ⓓ	terminating resistor:	yes
Ⓔ	electrical termination:	5-meter cordset with straight plug

Full Stroke Range:

® order code:	R25	R50	1	2	3	5	10	20	30	50
clockwise shaft rotations, min:	0.25	0.50	1	2	3	5	10	20	30	50
accuracy (% of f.s.):	0.3%	0.3%	0.3%	0.3%	0.3%	0.2%	0.15%	0.15%	0.15%	0.15%
potentiometer cycle life*:	2.5×10^6	2.5×10^6	2.5×10^6	2.5×10^6	2.5×10^6	5×10^5	2.5×10^5	2.5×10^5	2.5×10^5	2.5×10^5


**–number of times the sensor shaft can be cycled back and forth from beginning to end and back to the beginning before any measurable signal degradation may occur.*

Enclosure Material:

Ⓐ order code:	AL	SS
	powder-painted aluminum	303 stainless steel

Shaft Diameter:

Ⓑ order code:	25	6	25F	6F
	0.25-in. diameter	6 mm diameter	0.25-in. dia. w/flats	6 mm dia. w/flats



Baud Rate:

Ⓒ order code:	125	250	500
	125 kbaud	250 kbaud	500 kbaud

Terminating Resistor:


Ⓓ order code:	TR	NR
	terminating resistor	no terminating resistor

Ordering Information:


Electrical Connection:

order code:


blank	MC5	SC5	NC5
5-pin micro-connector *(no mating plug supplied)*	5-pin micro-connector w/ mating plug	5-pin micro-connector and 5 meter length cordset w/straight mating plug	5-pin micro-connector and 5 meter length cordset w/90° mating plug




connector
(contact view)



0.16" - 0.32" OD Cable (THIN)




length: 16ft [5M]
cable: Thin



length: 16ft [5M]
cable: Thin

mating plug
(contact view)



pin	signal	wire color
1	drain	brown
2	V+	white
3	V-	blue
4	Can-H	black
5	Can-L	grey

INTERTECHNOLOGY
1 Scarsdale Road
Don Mills, ON M3B 2R2
Tel: 416-445-5500 Fax: 416-445-1170 TOLL FREE: 1-800-465-1600
E-Mail: sales@intertechnology.com Website: www.intertechnology.com