
DPT250

Instrument Grade • Incremental Encoder

Short-Range String Encoder • High Resolution
25, 50-inch Stroke Range Options
Powder Painted & Anodized Aluminum Enclosure
Perfect Solution for Industrial & Testing Applications



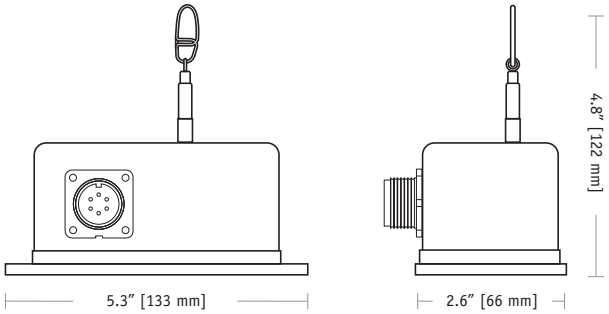

The DPT250 Cable-Extension Transducer offers a highly accurate incremental encoder output signal that can provide both position and velocity information. The output is a digital pulse stream that can provide resolution down to less than a thousandth's of an inch!

Delivering high accuracy and fine resolution without the need for perfect parallel alignment, this compact device offers the additional benefits of ease of installation and ability to interface to any PLC or controller. These features make the DPT250 the perfect choice for many applications that range from hydraulic cylinder positioning to robotic arm motion feedback.

General

Full Stroke Ranges	0-25 to 0-50 inches [0-625 to 0-1250 mm]
Output Signal	incremental encoder (quadrature)
Sensor	optical encoder
Output Driver Options	TTL/CMOS, Open Collector, Line Driver
Accuracy	see ordering information
Repeatability	see ordering information
Resolution Options	25 to 1250 pulses per inch
Measuring Cable	0.019-in. dia. nylon-coated stainless steel
Enclosure Material	powder-painted and anodized aluminum
Weight	2 lbs. max.


Electrical

Input Voltage	see ordering information

Environmental


Operating Temperature	0°F to 160°F (-20°C to 70°C)
Humidity	98% RH, no condensation
Vibration	up to 10g to 2000 Hz
Enclosure	IP 55, NEMA 12

Electrical Output Signal Options

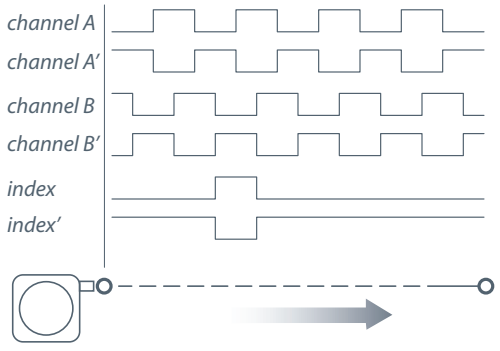

-- see ordering information for available channels

Fig. 1, Top Exit:

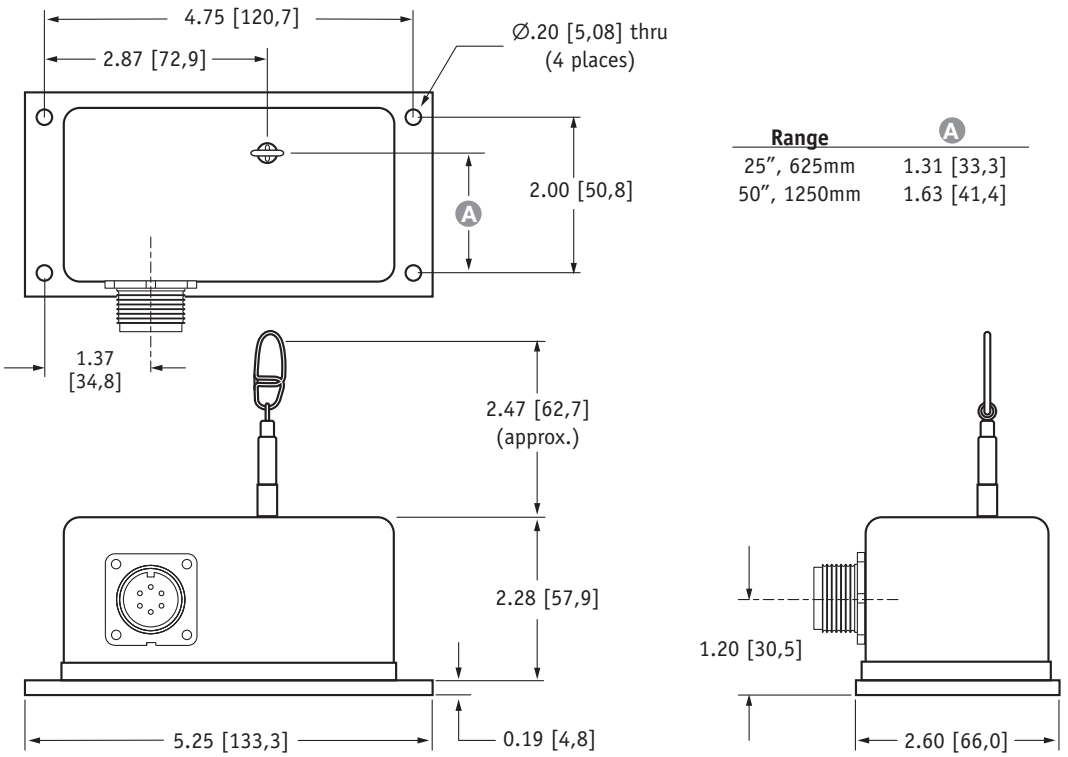

Range	A
25", 625mm	1.31 [33,3]
50", 1250mm	1.63 [41,4]

ALL DIMENSIONS ARE IN **INCHES [MM]** • tolerances are ±0.02 in. [±0,5mm]

Ordering Information:

Model Number:

DPT250 - ____ **-** ____ **1** ____ ____ **-** ____ ____ ____ **0**

order code: Ⓡ Ⓐ Ⓑ Ⓒ Ⓓ Ⓔ Ⓕ Ⓖ

Sample Model Number:

DPT250 - 0025 - 111 - 1130

Ⓡ	range:	25 inches
Ⓐ	measuring cable tension:	standard - 12 oz.
Ⓒ	cable exit:	top
Ⓓ	sensing circuit/channels:	TTL/CMOS, A,B
Ⓔ	resolution:	500 pulses per inch
Ⓕ	electrical connection:	6-pin plastic connector

Full Stroke Range:

Ⓡ *order code:*	0025	0050	0625	1250
full stroke range, min:	25 in.	50 in.	625 mm	1250 mm
accuracy:	±0.010 in. (max)	±.020 in. (max)	±0.25 mm (max)	±0.50 mm (max)
repeatability:	±0.005 in. (max)	±.010 in. (max)	±0.12 mm (max)	±0.25 mm (max)
cable tension* (±30%):	13 oz.	6 oz.	3,6 N	1,6 N
cable acceleration, max.:	11 g	4 g	11 g	4 gs
resolution options:	50, 500, 1000, 1250 pulses per inch	25, 250, 500, 625 pulses per inch	2, 20, 40, 50 pulses per mm	1, 10, 20, 25 pulses per mm

**note: increased cable tension options available for re-orders only (see below)*

Measuring Cable Tension:





Ⓐ *order code:*	1	H	2**	3**
	standard tension	high tension*		
25 inch range:	13 oz.	65 oz.	44 oz.	73 oz.
50 inch range:	6 oz.	33 oz.	22 oz.	36 oz.
625 mm range:	3,6 N	18,1 N	12 N	20 N
1250 mm range:	1,6 N	9,2 N	6 N	10 N
measuring cable:	.019-in. dia. nylon-coated stainless steel		.024-in. dia. stainless steel	

Reorder Only Reorder Only

**–note: spring tension tolerance: ±20% **–note: outline dimensions for these options not controlled on this datasheet.*

Measuring Cable Exit:


Ⓒ order code:	1	2	3	4
	top exit (see fig. 1)	front exit*	rear exit*	bottom exit*








**–note: dimensions for optional cable exits not controlled on this datasheet, please contact factory*


Sensing Circuit / Channels:

Ⓓ order code:	1	2	4	6
description:	TTL / CMOS	open collector	line driver	universal line driver
	Input voltage (V+): 4.5...13.2 Vdc Sink current: 20 mA max. Input current: 80 mA max.	Input voltage (V+): 10.8...26.4 Vdc Sink current: 20 mA max. Input current: 80 mA max.	Input voltage (V+): 5 Vdc Sink current: 20 mA max. Input current: 150 mA max.	Input voltage (V+): 5...30 VDC Source/Sink: 20 mA max. Input current: 50 mA max, no load











Resolution:

Ⓔ order code:	1	2	3	4
25 in. range:	500 ppi	1000 ppi	1250 ppi	50 ppi
50 in. range:	250 ppi	500 ppi	625 ppi	25 ppi
625 mm range:	20 ppmm	40 ppmm	50 ppmm	2 ppmm
1250 mm range:	10 ppmm	20 ppmm	25 ppmm	1 ppmm

Electrical Connection:

Ⓕ order code:	1	3	4
	15-inch, shielded instrumentation cable	6-pin plastic connector with mating plug	18-pin plastic connector with mating plug



15-inch, multiconductor cable





contact view

.30 – .39 in. [8 – 10 mm] cable dia.
16 AWG max conductor size
connector: MS3102E-14S-6P
mating plug: MS3106E-14S-6S





contact view

.26 – .30 in. [6,6 – 7,6 mm] cable dia.
20 – 24 AWG conductor size
connector: Conxall 14282-18PG-300-K
mating plug: Conxall 13282-18SG-326-K

color	TTL/CMOS Open Collector	5 V Line Driver Universal Line Driver
red	input voltage	input voltage
black	common	common
green	channel A	channel A
white	channel B	channel B
blue	-	channel A'
brown	-	channel B'
yellow	-	index
orange	-	index'

pin	TTL/CMOS Open Collector	5 V Line Driver Universal Line Driver
A	input voltage	input voltage
B	common	common
C	channel A	channel A
D	channel B	channel B
E	-	channel A'
F	-	channel B'

pin	TTL/CMOS Open Collector	5 V Line Driver Universal Line Driver
1	input voltage	input voltage
2	common	common
3	channel B	channel B
6	channel A	channel A
7	-	index
11	-	channel B'
12	-	channel A'
15	-	index'

version: 6.0 last updated: November 27, 2012

INTERTECHNOLOGY INC.
1-800-465-1600
19 Waterman Ave.Toronto,Ont. M4B1Y2
Tel:416-445-5500 Fax: 416-445-1170
Toll Free: 1-800-465-1600
Email: sales@intertechnology.com
Website: www.intertechnology.com