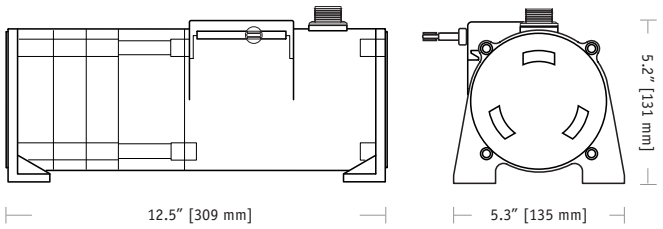
PT9420 (Extended Range)

Extended Ranges • 4...20mA, 0...20mA

Absolute Linear Position to 1700 inches (4300 cm)
Stroke Range Options: 0-600 to 0-1700 inches
VLS Option To Prevent Free-Release Damage
IP68 • NEMA 6 Protection • Hazardous Area Certification





GENERAL

Full Stroke Range Options (on this datasheet)	0-600 to 0-1700 inches
Output Signal Options	4...20 mA (2-wire) and 0...20 mA (3-wire)
Accuracy	± 0.12% full stroke
Repeatability	± 0.05% full stroke
Resolution	essentially infinite
Measuring Cable	nylon-coated stainless steel
Enclosure Material	powder-painted aluminum or 303 stainless steel
Sensor	plastic-hybrid precision potentiometer
Potentiometer Cycle Life	≥ 250,000, min.
Maximum Retraction Acceleration/ Velocity	see ordering information
Weight, Aluminum (Stainless Steel) Enclosure	14 lbs. (28 lbs.) max.

ELECTRICAL

Input Voltage	see ordering information
Input Current	20 mA max.
Maximum Loop Resistance (Load)	(loop supply voltage – 8)/0.020
Circuit Protection	38 mA max.
Impedance	100M ohms @ 100 VDC, min.
Output Signal, Zero Adjust	up to 50% of full stroke range
Output Signal, Span Adjust	to 50% of factory set span

ENVIRONMENTAL

Enclosure	NEMA 4/4X/6, IP 67/68
Hazardous Area Certification	see ordering information
Operating Temperature	-40° to 200°F (-40° to 90°C)
Vibration	up to 10 g to 2000 Hz maximum
Thermal Effects, Zero	0.01% f.s./°F, max.
Thermal Effects, Span	0.01%/°F, max.


EMC COMPLIANCE PER DIRECTIVE 89/336/EEC

Emission / Immunity	EN50081-2 / EN50082-2

The PT9420 is a great value for demanding long-range applications requiring a 4 - 20 mA linear position feedback signal. Sealed to meet NEMA 4 standards, this Cable-Extension Transducer will perform even under the harshest of environmental conditions.


As a member of Celesco's innovative family of NEMA-4 rated cable-extension transducers, the PT9420 offers numerous benefits. It installs in minutes, functions properly without perfectly parallel alignment, and when its cable is retracted, it measures only 6".

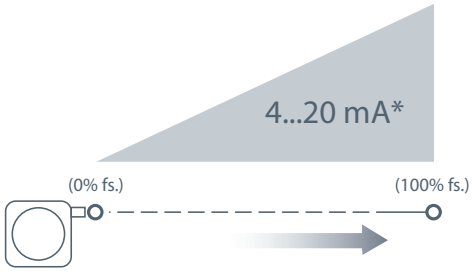
Output Signal:



**Optional 3-wire, 0...20mA output signal available.*

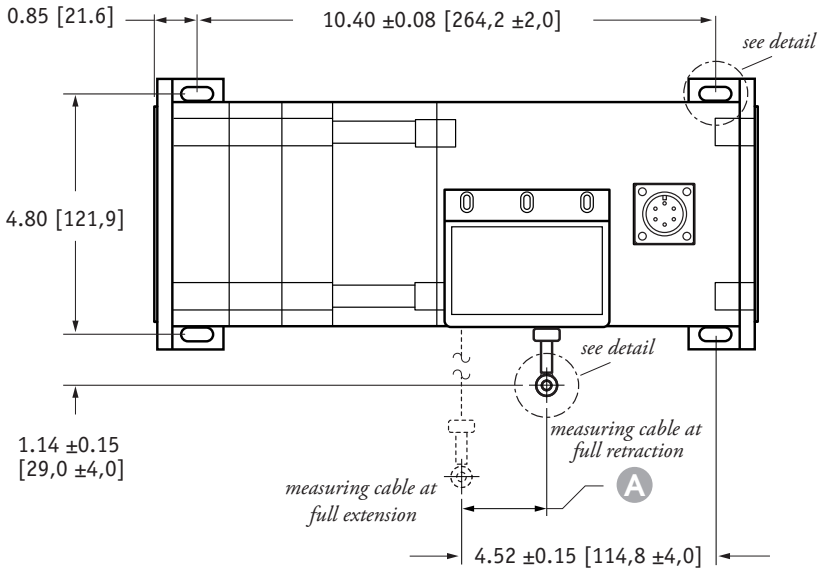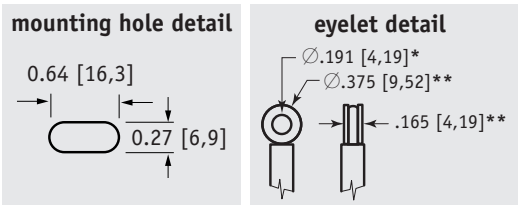
Outline Drawing






A DIMENSION

RANGE	inches [mm]
600	1.76 [44,7]
800	1.58 [40,1]
1000	1.98 [50,2]
1200	1.98 [50,2]
1500	1.86 [47,2]
1700	2.11 [53,6]

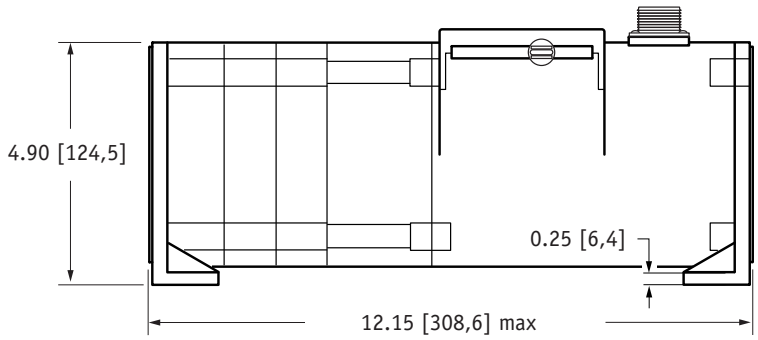

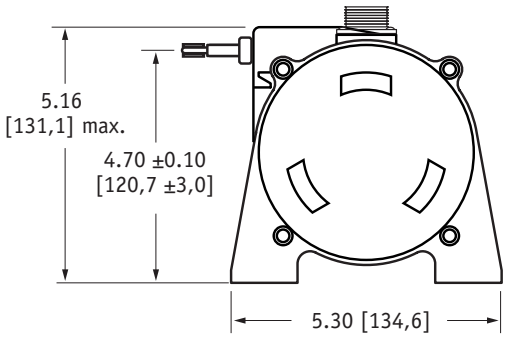

DIMENSIONS ARE IN INCHES [MM]
tolerances are 0.03 IN. [0.5 MM] unless otherwise noted.

* tolerance = +.005 –.001 [+.13 –.03]
** tolerance = +.005 –.005 [+.13 –.13]

VLS Option - Free Release Protection

The patented Celesco Velocity Limiting System (VLS) is an option for PT9000 Series cable extension transducers that limits cable retraction to a safe 40 to 55 inches per second for the single spring option and 40 to 80 inches per second for the higher tension dual spring option.

The VLS option prevents the measuring cable from ever reaching a damaging velocity during an accidental free release. This option is ideal for mobile applications that require frequent cable disconnection and reconnection. It prevents expensive unscheduled downtime due to accidental cable mishandling or attachment failure.

How To Configure Model Number for VLS Option:

VLS 9420 - ____ **-** ____ ____ ____ **-** ____ ____ ____ ____

R A B C D E F G

creating VLS model number (example)...

1. select PT9420 model — **PT9420-1200-111-1110**
2. remove "PT" from the model number — **~~PT~~ 9420-1200-111-1110**
3. add "VLS" — **VLS + 9420-1200-111-1110**
4. completed model number ! — **VLS9420-1200-111-1110**

Ordering Information:

Model Number:

PT9420- ____ Ⓡ **-** ___ Ⓐ Ⓑ Ⓒ **-** 1 Ⓓ Ⓔ Ⓕ 0 Ⓖ
order code:

Sample Model Number:
PT9420 - 1200 - 111 - 1110

Ⓡ	range:	1200 inches
Ⓐ	enclosure/cable tension:	aluminum
Ⓑ	measuring cable:	nylon-coated stainless
Ⓒ	cable exit:	front
Ⓔ	output signal:	4...20 mA, 2-wire
Ⓕ	electrical connection:	6-pin plastic connector

Full Stroke Range:

Ⓡ *order code:*	0600	0800	1000	1200	1500	1700
full stroke range, min:	600 in.	800 in.	1000 in.	1200 in.	1500 in.	1700 in.
cable tension (±35%):	27 oz.	24 oz.	20 oz.	19 oz.	18 oz.	17 oz.

Enclosure Material:

Ⓐ *order code:*	1	3
enclosure material:	powder-painted aluminum	303 stainless steel
max. acceleration:	1g	.33g
max. velocity:	60 inches/sec.	20 inches/sec.





Measuring Cable:

Ⓑ *order code:*	1	2
	nylon-coated stainless steel*	un-coated stainless steel*

**cable diameter:*

stroke range:	0600	0800	1000	1200	1500	1700
nylon-coated cable:	.034 in.	.019 in.	.019 in.	.019 in.	.014 in.	.014 in.
un-coated cable:	.031 in.	.018 in.	.018 in.	.018 in.	.015 in.	.015 in.

Cable Exit:

Ⓒ *order code:*	1	2	3	4
	front	top	back	down
				


Output Signals:

Ⓔ *order code:*	1	2	3	4	5*	6*
output signal options:	4...20 mA	20...4 mA	0...20 mA	20...0 mA	4...20 mA	20...4 mA
						
sensitivity:	16 mA/full stroke ±0.25%		20 mA/full stroke ±0.25%		16 mA/full stroke ±0.25%	
wiring configuration:	2 – wire		3 – wire		2 – wire	
input voltage:	8 – 34 vdc		14 – 29 vdc		14 – 32 vdc	
hazardous area certification:	not certified				CSA • Cenelec	

Output Signal Example:

ordercode = **1** = 4...20 mA

4 mA = 

20 mA = 

Hazardous Area Certifications:

CSA Standard 22.2
Class 1
Groups A, B, C and D





Cenelec
LCIE EEx
ia IIc T4

**IMPORTANT: intrinsically safe when powered from a CSA certified zener barrier rated 28 VDC max, 110 mA max per installation drawing#677984*




Ordering Information (cont.):

Electrical Connection:

F *order code:*


1	2	3	4
6-pin plastic connector w/mating plug	10-ft. [3 M] waterproof cable	6-pin metal connector w/mating plug	25-ft. [7.5 M] instrumentation cable
IP 67, NEMA 4X,6**	**IP 67, NEMA 4X**, 6**	**IP 65, NEMA 4**	**IP 67, NEMA 6**
			
1/2 - 5/16" [14 - 8 mm] cable dia. 16 AWG max conductor size connector: MS3102E-14S-6P mating plug: MS3106E-14S-6S	10 ft. x 0.4-in. dia. [3 M x 10 mm dia.] 18 AWG, type SJTW	3/8-in. [9 mm] max cable dia. 16 AWG max conductor size connector: MS3102E-14S-6P mating plug: MS3106E-14S-6S	25 ft. x 0.2-in. dia. [7,5 M x 5 mm dia.] 24 AWG, shielded

F *order code:*

5	6	7
100-ft. [30 M] waterproof cable	10-ft. [3 M] **pressure tested*** waterproof cable	100-ft. [30 M] **pressure tested*** waterproof cable
IP 67, NEMA 4X,6**	**IP 68, NEMA 4X**, 6P**	**IP 68, NEMA 4X**, 6P**
		
100 ft. x 0.4-in. dia. [30 M x 10 mm dia.] 18 AWG, type SJTW	10 ft. x 0.4-in. dia. [3 M x 10 mm dia.] 18 AWG, type SJTW	100 ft. x 0.4-in. dia. [30 M x 10 mm dia.] 18 AWG, type SJTW

6-pin Mating Plug

pin	2-wire	3-wire
A	8...34 vdc***	14...29 vdc
B	4...20 mA out	common
C	–	0...20 mA out
D	case ground	–



contact view

Waterproof Cable


color code	2-wire	3-wire
WHITE	8...34 vdc***	14...29 vdc
BLACK	4...20 mA out	common
GREEN	case ground	0...20 mA out

Instrumentation Cable

color code	2-wire	3-wire
RED	8...34 vdc***	14...29 vdc
BLACK	4...20 mA out	common
WHITE	n/a	n/a
GREEN	case ground	0...20 mA out

Notes:
- * *–Test pressure: 100 feet [30 meters] H_2O (40 PSID); Test Medium: Air; Duration: 2 hours.*
- ** *–NEMA 4X applies to stainless steel enclosure only.*
- *** *–14-32 VDC for hazardous area option.*


Output Signal Settings:

output signal	*switch setting*	*signal board*
0...20 mA *or* 4...20 mA		
20...0 mA *or* 20...4 mA		

dip-switch location

The output signal direction can be reversed at any time by simply changing the dip-switch settings found on the internal signal board. After the settings have been changed, adjustment of the Zero and Span trimpots will be required to precisely match signal values to the beginning and end points of the stroke.

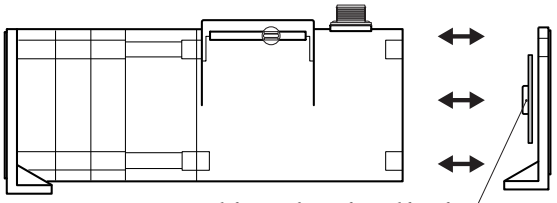To gain access to the signal board, remove four Allen-Head Screws and remove end cover bracket.



internal dip switches and signal board

Caution! Do Not Remove Spring-Side End Cover

Removing spring-side end cover could cause spring to become unseated and permanently damaged.

INTERTECHNOLOGY INC.
1-800-465-1600
19 Waterman Ave.Toronto,Ont. M4B1Y2
Tel:416-445-5500 Fax: 416-445-1170
Toll Free: 1-800-465-1600
Email: sales@intertechnology.com
Website: www.intertechnology.com