Micromachined Servo Accelerometer

ENDEVCO MODEL MSA100A


Model MSA100A


- **3 mg Bias Composite Error**
- **Rugged, Low Vibration Rectification**
- **High Resolution**
- **Range Adjustable**
- **Self Test**
- **Low Profile**



Actual size

MSA100A OUTLINE DRAWING

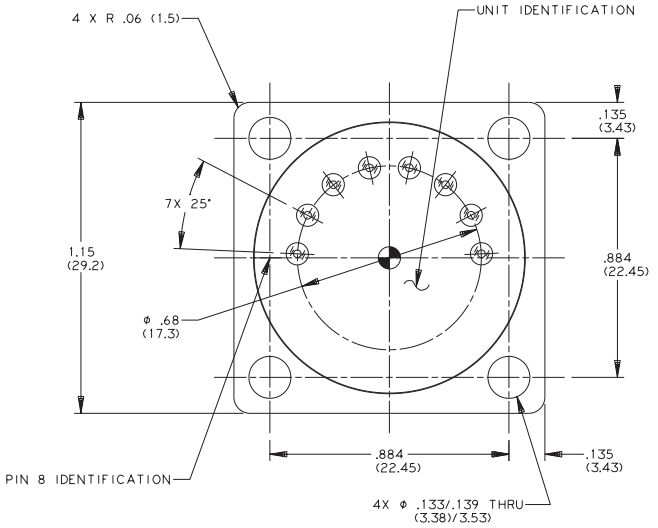

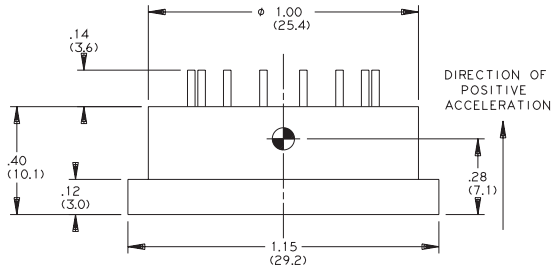

PIN DESIGNATIONS:

pin 8 - (+) exc voltage
pin 7 - temp sensor out
pin 6 - (-) exc voltage
pin 5 - signal gnd (shorted internally to pin 4)
pin 4 - power gnd (shorted internally to pin 5)
pin 3 - self test
pin 2 - range selection
pin 1 - signal output

DESCRIPTION

The ENDEVCO® Model MSA100A Servo Accelerometer utilizes a force rebalanced sensor that offers exceptional ruggedness, high resolution, and low vibration rectification. Temperature output and calibration coefficients are standard features allowing for modeling to 3 mg accuracies.

The Model MSA100A is designed for inertial motion studies in vehicles, tactical grade missile IMU's, flight tests, and tilt/angle measurements.

At the heart of the MSA100A is a three-layer micromachined silicon sensor. The middle layer includes the proof mass which, with applied acceleration, is electrostatically rebalanced to a null position between the upper and lower electrodes. This force rebalancing offers a wide bandwidth, minimal non-linearity and excellent performance in high shock and vibration environments. External resistors are used to adjust full scale range from the standard ±50 g's to lower g levels without affecting the accelerometer's electronics. The MSA100A also has self-test capability which moves the proof mass and outputs a proportional signal.

The micromachined silicon sensor and hybrid electronics are hermetically sealed for environmental protection in a stainless steel case with an industry standard mounting pattern. The Servo Accelerometer is also available with a triangular mounting plate as a Model MSA110A.

U.S. Patent 5,205,171

SPECIFICATIONS

PERFORMANCE CHARACTERISTICS: All values are typical at +75°F (+24°C) and ±15 Vdc excitation and with ±50 g range unless otherwise stated. Calibration data, traceable to the National Institute of Standards, (NIST), is supplied. Reference Note [6] for definitions.

	Units	MSA100A/MSA110A
RANGE[1]	g	±50, Adjustable to ±0.5 [7]
BIAS	mg Max	±250
BIAS COMPOSITE ERROR [2]	mg rms Typ	3
	mg rms Max	5
BIAS TEMPERATURE SENSITIVITY	µg/ °F Typ	330
	µg/ °C Typ	600

ENDEVCO MODEL MSA100A

Micromachined Servo Accelerometer

SPECIFICATIONS—continued

PERFORMANCE CHARACTERISTICS—continued

	Units	MSA100A/MSA110A
SCALE FACTOR	mV/g	200 ±20
SCALE FACTOR COMPOSITE ERROR [2]	ppm Max	1000
SCALE FACTOR TEMPERATURE SENSITIVITY	ppm/°F Typ	50
	ppm/°C Typ	90
NON-LINEARITY	% FSO Typ	±0.1
FREQUENCY RESPONSE (±5% max, ref 100 Hz)	Hz	0 to 300
-90° PHASE SHIFT	Hz Typ	3500
PHASE RESPONSE (0 to 300 Hz)	degree, Typ	-10
	degree, Max	-15
AXIS MISALIGNMENT	% Max	1
VIBRATION RECTIFICATION COEFFICIENT [3] (0 to 2000 Hz)	$\mu g/g^2$ Max	30
VIBROPENDULOSITY	$\mu g/g^2$ Max	10
SELF-TEST	g/volt Typ	-2.5
TEMPERATURE SENSOR OUTPUT@ +75°F (+24°C) [4]	V Typ	0.630
TEMPERATURE SENSOR SENSITIVITY	mV/°F Typ	1.2
	mV/°C Typ	2.1
ACTIVATION TIME	sec Max	0.5

ELECTRICAL

EXCITATION	±13 Vdc to ±18 Vdc	
Bias Voltage Sensitivity	< 1 µg/Vdc	
Scale Factor Voltage Sensitivity	<200 ppm/Vdc	
INPUT CURRENT TYPICAL	(+) supply 19 mA, (-) supply 8 mA	
OUTPUT RESISTANCE	1000 ohms maximum	
INSULATION RESISTANCE	>20 Mohm at 50 Vdc	
OUTPUT NOISE [5] TYPICAL	0.5 to 10 kHz	50 µg rms/√Hz

PHYSICAL

CASE, MATERIAL	304L Stainless Steel
ELECTRICAL CONNECTIONS	Eight solder pins
IDENTIFICATION	Manufacturer's logo, model number and serial number
MOUNTING TORQUE	Holes for 4-40 or M3 mounting screws/ 6 lbf-in (0.7 Nm)
WEIGHT	32 grams maximum

ENVIRONMENTAL

TEMPERATURE RANGE, OPERATING	-65 to +221°F (-55 to +105°C)
VIBRATION	30 grms, 20 to 2000 Hz
SHOCK (half-sine pulse)	5000 g min, 200 µsecond or longer
HUMIDITY	Unaffected. Hermetically sealed
ALTITUDE	Unaffected
MAGNETIC SENSITIVITY ON BIAS	30 µg/ Gauss at 15 Gauss field

CALIBRATION DATA SUPPLIED

BIAS	mV
SCALE FACTOR	mV/g
AXIS MISALIGNMENT	%
TEMPERATURE MODELING	Coefficients for third order fit of Bias and Scale Factor, single order fit for Temp Sensor Output
FREQUENCY RESPONSE	20 to 10 khz

ACCESSORIES

EHW265	(4) Size 4, Flat Washers
EH409	(4) 4-40 X 3/8 inch Cap Screws
EHM464	(1) Hex Wrench

NOTES

1. For best results unit should be calibrated to required lower acceleration ranges when rescaling.
2. Standard deviation of in-run temperature modeling residuals including repeatability and hysteresis
3. Optional 10 $\mu g/g^2$ available on special order.
4. Temperature modeling provides third order coefficients for bias and scale factor.
5. With 50 g full scale.
6. IEEE Std 337-1972. Standard Specification Format Guide and Test Procedure for linear, single axis, pendulous, analog and torque balance accelerometer.
7. Range selection external resistor (R_S) connected from pin 2 to pin 4.

$$R_S = \frac{10{,}000\ \Omega}{\left(\frac{S_d}{S_u}\right) - 1}$$

S_d = desired scale factor, V/g.
S_u = unadjusted scale factor, V/g.

8. Maintain high levels of precision and accuracy using Endevco's factory calibration services. Call Endevco's inside sales force at 800-982-6732 for recommended intervals, pricing and turn-around time for these services as well as for quotations on our standard products.

Continued product improvement necessitates that Endevco reserve the right to modify these specifications without notice. Endevco maintains a program of constant surveillance over all products to ensure a high level of reliability. This program includes attention to reliability factors during product design, the support of stringent Quality Control requirements, and compulsory corrective action procedures. These measures, together with conservative specifications have made the name Endevco synonymous with reliability.

INTERTECHNOLOGY INC. 1-800-465-1600
1 Scarsdale Road
Don Mills, ON M3B 2R2
Tel: 416-445-5500
Fax: 416-445-1170
E-Mail: sales@intertechnology.com