
9323 DOUBLE ENDED BEAM LOAD CELL

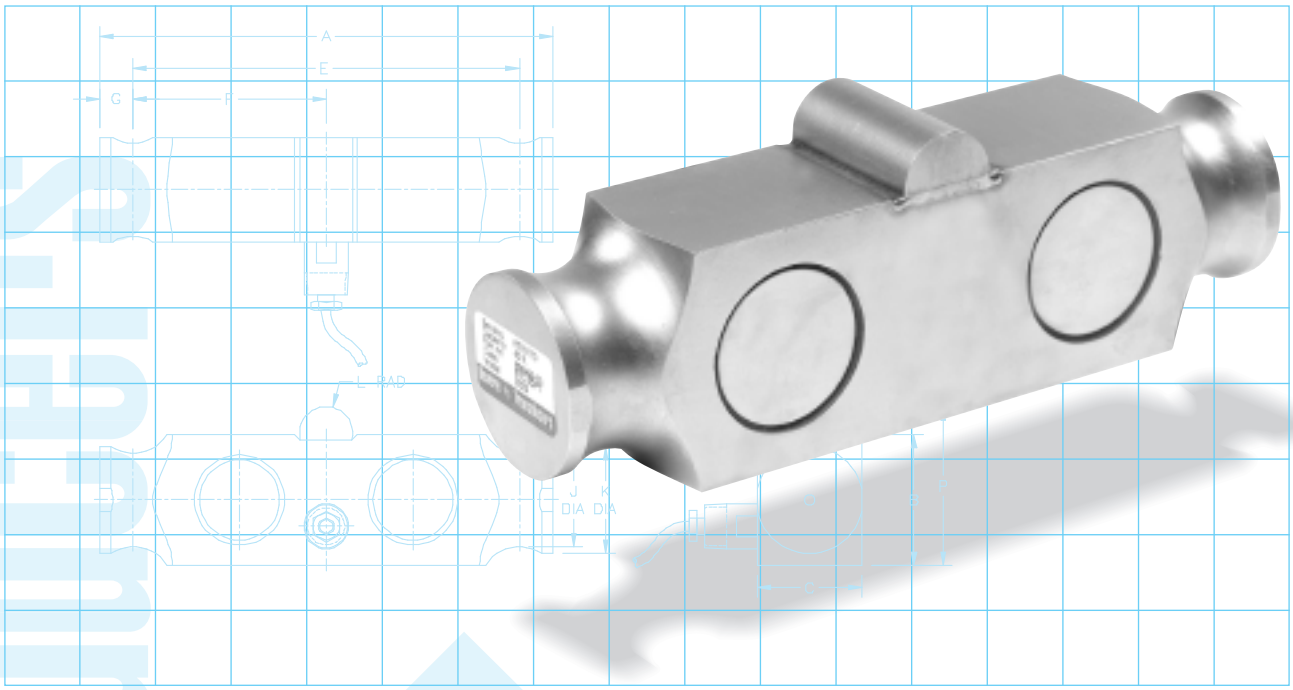

FEATURES:

- Capacities: 20 to 75 K lbs
- Environmental protection: IP67 (DIN 40.050)
- Material: Stainless Steel

APPLICATIONS:

- Weighbridges
- Silos, Tanks and Hoppers

DESCRIPTION:

The 9323 is a Double Ended Beam type load cell.

A reliable sealing and mechanical protection of the strain gauge area is ensured by the use of potting compound with a metal cover.

APPROVALS:

Class IIIL 10000d

Factory Mutual

Revere Transducers
an SI Technologies company

9323: SPECIFICATIONS

Parameter	Symbol	Unit of Measure	Specification
			Imperial
Capacities	E_{max}	lb	20K 25K, 30K, 40K, 50K, 60K, 75K
Accuracy Class			B10
Accuracy Class According to			NTEP Class IIIL
Potentially Explosive Atmospheres options			Factory Mutual
Maximum number of Verification Intervals	n_{lc}		10000d
Minimum Verification Interval	v_{min}		0.60, 0.75, 0.90, 1.20, 1.50, 1.80, 2.25
Combined Error[1]		±%S	0.02
Creep error (20 minutes)		±%S	0.03
Temperature Effect on Zero	TC_O	±%FS/5°C (/°F)	0.0090 (0.0010)
Temperature Effect on Output	TC_S	±%S/5°C (/°F)	0.0072 (0.0008)
Rated Output	FS	mV/V	3 ± 0.003
Compensated Temperature Range	T_{cps}	°C (°F)	-10 to +40 (+14 to +104)
Operating Temperature Range	T_{opr}	°C (°F)	-53 to +93 (-65 to +200)
Environmental Protection			IP67
Cable Length		m (ft)	9 (30)
Cable Type			4 Wire Shielded, shield is not connected to load cell body
Zero Balance		±%FS	1.0
Safe Load Limit	E_{lim}	$\%E_{max}$	150
Ultimate Load	E_{ult}	$\%E_{max}$	300
Safe Side Load Limit		$\%E_{max}$	100
Excitation Voltage		Volts AC or DC	10 Recommended, 15 Maximum
Input Resistance		Ohms	700.0 ± 7.0
Output Resistance		Ohms	700.0 ± 7.0
Insulation Resistance at 50 VDC		Mega Ohms	>5000
Element Material		ASTM	Stainless Steel


Notes:
- We continually improve our products and therefore specifications are subject to change without notice.
- The accuracy may be affected if 4-wire load cell cables are shortened.

[1] Includes the effects of Non-Linearity and Hysteresis.

Wiring color code:

Excitation +	Red
Excitation -	Black
Output +	Green
Output -	White
Shield	Transparent

	Dimensions in inches	
Capacity	20K- 25K	30K - 75K
A	8.00	8.50
B	1.94	2.45
C	1.44	1.95
D	2.72	3.23
E	7.12	7.25
F	3.56	3.63
G	0.44	0.63
H	0.38	0.75
J Rad	0.80	1.75
ØK	1.00	2.00
N	0.70	0.73
P	2.31	3.00
Q	0.38	0.50

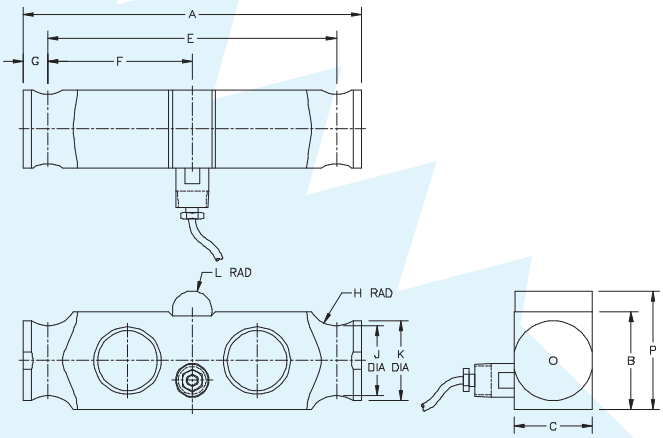

Attention: All dimension tolerances according to ISO 2768m, unless otherwise specified.

Mounting:
Correct mounting of the load cells is essential to ensure optimum accuracy and performance. Further information is available on request.

No Mounts available for 9323.

INTERTECHNOLOGY INC.
1-800-465-1600
1 Scarsdale Rd., Don Mills, ON M3B 2R2
Tel: 416-445-5500, Fax: 416-445-1170
E-Mail: sales@intertechnology.ca