


FUTEK MODEL T5106 *FLANGE TO FLANGE REACTION TORQUE SENSOR*

Drawing Number: F3668	
INCH [mm]	R.O.= Rated Output

WIRING CODE (CC4)			
+Excitation	-Excitation	+Signal	-Signal
RED	BLACK	GREEN	WHITE

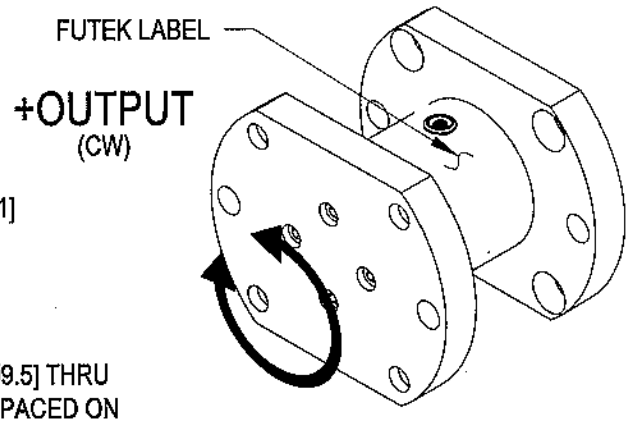

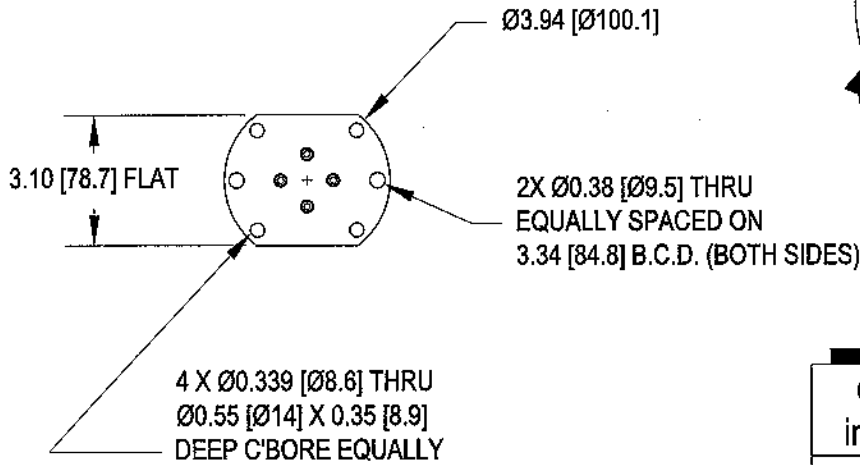

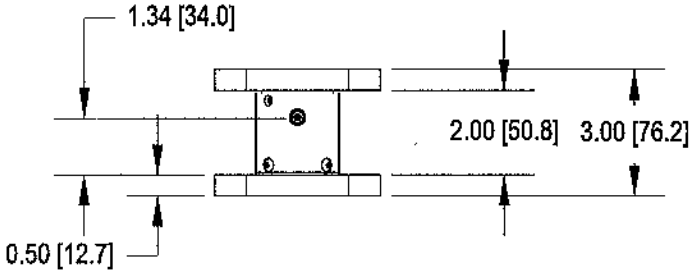

CAPACITY in-oz	CAPACITY Nm	TORSIONAL STIFFNESS in-oz/rad
5*	0.04	325
10*	0.08	700
20*	0.15	1600
50*	0.37	3500
100*	0.75	7300
160*	1.2	11000
400*	3.0	30000
1000	7.5	71000

* OVERLOAD PROTECTION ON 5 to 400 in-oz [0.04 to 3 Nm]

CAPACITY in-lb	CAPACITY Nm	TORSIONAL STIFFNESS in-lb/rad
100	12	77000
200	24	95000
500	60	199000

FOR HIGHER CAPACITIES REFER TO MODELS T5400/T5410

SPECIFICATIONS:

RATED OUTPUT	*1.5 mV/V nom. (5 in-oz) 2 mV/V nom. (10 in-oz to 500 in-lb)*
SAFE OVERLOAD	*150% of R.O.*
ZERO BALANCE	*±1% of R.O.*
EXCITATION (VDC OR VAC)	*18 VDC MAX*
BRIDGE RESISTANCE	*350 Ω nom. (5 to 1000 in-oz) 700 Ω nom. (100 to 500 in-lb)*
NONLINEARITY	*±0.2% of R.O.*
HYSTERESIS	*±0.2% of R.O.*
NONREPEATABILITY	*±0.05% of R.O.*
TEMP. SHIFT ZERO	*±0.002% of R.O./°F [0.0036% of R.O./°C]*
TEMP. SHIFT SPAN	*±0.002% of LOAD/°F [0.0036% of LOAD/°C]*
COMPENSATED TEMP.	*60 to 160°F [15 to 72°C]*
OPERATING TEMP.	*-60 to 200°F [-50 to 93°C]*
WEIGHT	*14 oz [397 g]*
MATERIAL	*Aluminum*

CONNECTOR: 4 Pin Lemo Receptacle EGG.0B.304.CLL

ACCESSORIES AND RELATED INSTRUMENTS AVAILABLE

CALIBRATION (STD)	*5 pt. CW and CCW; 60K Ω (5 to 1000 in-oz) 100K Ω (100 to 500 in-lb) SHUNT CAL. VALUE*
CALIBRATION TEST EXCITATION	*10 VDC*

FUTEK
ADVANCED SENSOR TECHNOLOGY, INC.

This drawing is submitted solely for the information and exclusive use of the original addressee. It is not to be divulged in whole or in part, by any firm or individual without written permission from FUTEK

10 THOMAS
IRVINE, CA 92618 USA
1-800-23-FUTEK (38835)

INTERNET:
http://www.futek.com