



MELT PRESSURE TRANSDUCERS & TRANSMITTERS

Product Specification Sheet

FLANGE MOUNTED PRESSURE TRANSMITTER & TEMPERATURE PROBE Models 335, 435 with FX, FY option



***REFER TO APPENDIX A
FOR WIRING CODES***

FEATURES:


- All-welded stainless steel construction
- State-of-the-art circuitry allows heavier diaphragm and increased fatigue life
- Standard options for every requirement
- HART Communication available (435)

PRESSURE RANGES:

- From 0-25 through 0-10,000 psig (See ordering guide)

ACCURACY:

- 0.5% FSO standard, 0.25% FSO available
- 0.15% FSO available on Models 435%

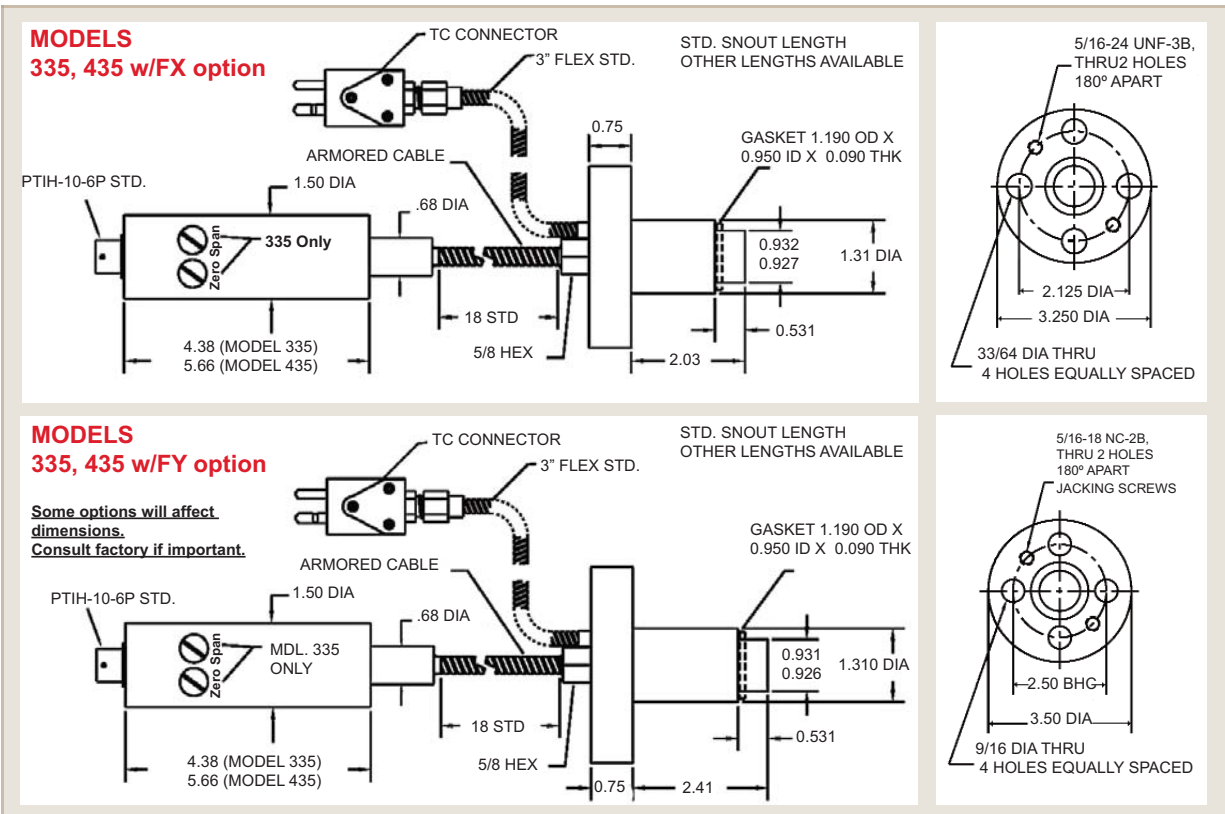

GP:50 reserves the right to make product improvements and amendments to the product specifications stated throughout this brochure without prior notification. Please contact the factory on all critical dimensions and specifications for verification.



MELT PRESSURE TRANSDUCERS & TRANSMITTERS

Specifications reflect standard product, improved performance/mechanical options available. Modifications may alter specs, consult factory for more information.

Accuracy	Static Error Band (Non-linearity, Hysteresis, Non-repeatability, also includes Temperature effects for model 435) ± 0.5% FSO (RSS) (335), ± 0.5% FSO (RSS) ranges less than 500 psi (435), ± 0.2% FSO (RSS) 500 through 3500 psi (435), ± 0.15% FSO (RSS) 5000 through 30000 psi (435)	
Ranging (435 only)	3:1 25 through 2500 psi 5:1 3000 through 30000 psi	
Material in Contact with Pressure Media	316 stainless steel / 15-5 PH diaphragm, Armoloy coated (hard chrome) Diamond, Boron or Titanium Nitride coatings optional	
Proof Pressure	2 times full scale pressure range	
Temperature Limits	Diaphragm 600°F (315°C) Standard Fill	Strain Gauge Housing 176°F (80°C)
Temperature Effects From Fill (335) From Strain Gauge Housing (335) Fill & Housing (435)	Zero - 2 psi/100°F at diaphragm Zero/Span - Less than ±1.0% FSO/100°F (± 2.0% FSO/100°C) Included in accuracy	
Electricals (Model 335) (Model 435) Zero Balance Load Impedance	Excitation Voltage 9-36 Vdc 12-36 Vdc (Model 335) 4.0 mA ±5% FSO at 70°F vertical tip down 1350 ohms max. at 36 Vdc & 750 ohms at 24 Vdc Zero Pot. Adjustment (335) +10% - 80% FSO on ranges below 500 psi	Output at 70° F 4-20 mA ±2% FSO 4-20 mA ± 2% FSO (Model 435) 4.0 mA ±0.2% FSO at 70°F vertical tip down 1200 ohms maximum, at 36 Vdc and 600 ohms at 24 Vdc Span Pot. Adjustment (335) ± 20% FSO on ranges above 500 psi
Connections Pressure Electrical Thermocouple	3.5" OD Flange, 3.25" OD Flange (see ordering guide) PTIH-10-6P connector Standard 2 pole, 7/16" pin spacing	
Enclosed Materials	316 stainless steel	
Mounting Torque	110 inch pounds, maximum	
Identification	Etched stainless steel nameplate welded to body.	

ORDERING GUIDE

Model: X 35 - XX - FX / XX / XX / XX / XX

ELECTRICAL OUTPUT	
1	3.33 mV/V
2	0-5 Vdc
3	4-20 mA

BASE MODEL	
35	Flex Stem with J-Type Thermocouple

PRESSURE RANGE			
PO	25 PSI	UL	2 BAR
PT	30 PSI	UM	3 BAR
PV	50 PSI	UN	5 BAR
PX	75 PSI	UP	7.5 BAR
PZ	100 PSI	UQ	10 BAR
RB	150 PSI	UR	15 BAR
RD	200 PSI	US	20 BAR
RE	250 PSI	UT	30 BAR
RF	300 PSI	UV	50 BAR
RH	500 PSI	UX	75 BAR
RJ	600 PSI	SZ	Custom
RK	750 PSI		
RM	1,000 PSI		

FLANGE TYPE	
X	3.25 Diameter Flange
Y	3.50 Diameter Flange

CAPILLARY TUBE LENGTH	
Blank	18 Inch (457.2mm) Flex
HS	9 Inch (228.6mm) Flex
HY	12 Inch (304.8mm) Flex
HV	24 Inch (609.6mm) Flex
GT	30 Inch (762mm) Flex

DIAPHRAGM OPTIONS	
Blank	15-5 PH Diaphragm
GP	Hastelloy C-276 Diaphragm & Threads
GQ	Boron Hardened Diaphragm
JW	Titanium Nitride Coated Diaphragm & Threads
QS	Diamond Coating (DLC)

FILL TYPES	
Blank	Mercury (Standard - Included)
QJ	Nak Fill (750°F Max)
GW	Nak Fill with Inconel Diaphragm (1000°F Max)
GV	Silicon Oil Fill (500°F Max)
GX	Mineral Oil Fill (500°F Max)

CONNECTOR OPTIONS	
Blank	6-Pin Bendix (PTIH-10-6P)
CC	8-Pin Bendix (PCO2E-12-8P)
CF	1/2" NPT (M) Thread with 36" Leads

* Other Options Available - Consult Factory

INTERTECHNOLOGY
INC.

19 Waterman Ave, Toronto, Ont. M4B1Y2
Ph#416-445-5500 Fax#416-445-1170

Toll Free: 1-800-465-1600

Email: sales@intertechnology.com
Website: www.intertechnology.com