

IT-487 – 24" WU (1920 x 1200)

NO. DS200640340107 | EN
2013 | V 01.02.11



IT-487 – 24" WU (1920 x 1200)

Highlights

- Rugged Panel PCs for temperatures ranging between -20 °C up to +60 °C [-4 °F up to +140 °F]
- Rugged, modular structured product design
- Many enclosure and mounting options

Ingress protection

Front side IP66, back side IP20

Firmware/Software

- OPEN HMI – open for all software applications
- Ready-to-run operating system in 25 languages
- Windows Embedded Standard 2009 / 7 Ultimate
- Optional installation of visualization software e. g. WinCC flexible® / Factory Talk View® / Vijeo Citect®, etc.

Description

The IT-487 with 24" monitor, and 1920 x 1200 (WUXGA) resolution is the widest screen size available for industrial on-site operator stations, and the trend-setting solution in the process industry. The IT-487 is the result of a sophisticated combination of the widescreen technology of the T-series and state-of-the-art PC technology.

As a stand-alone PC, the IT-487 can perform automation tasks on site, as well as all PCS / ERP and MES tasks within the network. The LED-backlit technology provides best image quality and readability of all process images. The 24" monitor is optionally available with intuitive touch screen, operated with gloves or touch pen. The IT-487 can be front-mounted into enclosures (control panel module with anodized aluminum front plate), or rear-mounted (without front frame).

The IT-487 is ready-to-run worldwide, with pre-installed, multilingual Windows Embedded Standard 2009 or -7 Ultimate operating system (QNX, Linux optional) – without time-consuming installation of drivers or operating systems.


All pre-installed operating systems are protected against external manipulations. In the rare case of a system failure, the BACKUP / RECOVERY solution via USB stick allows to immediately restore the original state.

IT-487 – 24" WU (1920 x 1200)

NO. DS200640340107 | EN
2013 | V 01.02.11



Operating Principle

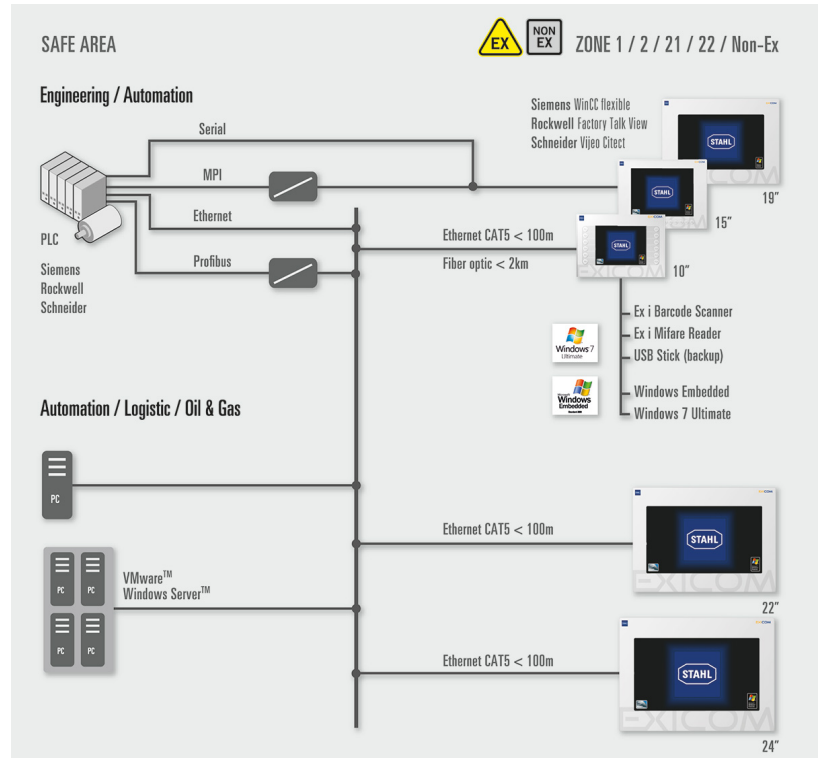

IT-487 – 24" WU (1920 x 1200)

NO. DS200640340107 | EN
2013 | V 01.02.11



Technical Data

Mounting design	Front panel mounting
Display	61 cm (24"WU) TFT color display 16.7 million colors WUXGA 1920 x 1200 Aspect ratio 16:10 Brightness 300 cd/m ² Contrast 1000:1 5 wire resistive touch screen optional
Backlighting	LED technology Service life 50,000 h at +20 °C [-4 °F]
Display function keys	-
External keyboard	Yes (optional), 107 keys, incl. trackball / joystick / mouse / touch pad
Interfaces	1 x Ethernet 10/100BaseTx or FO 100BaseFx, 100 Mbit 2 x USB (Hub) 1 x USB (Root) 2 x USB (keyboard, pointing device) 1 x RS-232 1 x Audio line out Optional interfaces 1 x ReaderBox for card reader / barcode scanner WLAN via USB
Dimensions (W x H x D)	660 x 475 x 110 mm (23.62 x 18.70 x 4.33")
Cutout	615 x 435 (+/- 0.5) mm (24.21 x 17.12 (+/- 0.02)")
Mounting position	horizontal / vertical
Weight	10 kg (22.05 lbs)
Power supply	24 VDC (max. = 3 A) 100 - 240 VAC (max. = 1 A)
Permissible ambient temperature ranges	Operation -20 °C up to +60 °C [-4 °F ... +140 °F] Permanent operation -20 °C up to +50 °C [-4 °F ... +122 °F] Operation with heater version O30* -30 °C up to +50 °C [-22 °F ... +122 °F] Storage -30 °C up to +70 °C [-22 °F ... +158 °F] * The O30 version is only available for the AC version devices !
Heat dissipation	approx. 40 % through front plate, approx. 60 % through back side
Relative humidity	10 up to 90 % at +40 °C [+104 °F], non condensing
Material front side	Aluminum front plate, glass, optional polyester touch screen
Material back side	Galvanized sheet steel
Ingress protection	Front side IP66, back side IP20