
Bulk Container Mixers – Gear Drive
Bung or Bracket Mount
Vertical Motors for Single Containers

Neptune Bulk Container Mixers allow mixing in semi-bulk shipping containers.

Folding Propeller

For HGL, DT, RAB and RGT




Series HGL, 430 rpm

Features

- Mounts to 2-in. coupling or flange.
- 316SS propeller folds to fit through 2-in. opening; opens to 9-in. operating diameter.
- 1/3 HP and 1/2 HP single-phase TEFC units supplied with 8 feet of cord and 3 prong plug.

Model Number	Standard Motor Description	Shaft Diameter
Totally-enclosed fan-cooled (TEFC)		
HGL-2.0	1/3 HP-1-115/230	¾"
HGL-2.2	1/3 HP-3-230/460	¾"
HGL-3.0	1/2 HP-1-115/230	¾"
HGL-3.2	1/2 HP-3-230/460	¾"
HGL-5.0	3/4 HP-1-115/230	¾"
HGL-5.2	3/4 HP-3-230/460	¾"
HGL-6.0	1 HP-1-115/230	¾"
HGL-6.2	1 HP-3-230/460	¾"
Air motor		
HGL-4.0	1/2 HP AIR Air Requirements: 20CFM at 40PSI	¾"
HGL-7.0	3/4 HP to 1 HP AIR Air Requirements: 30-40CFM at 25-35PSI	¾"

For Explosion-proof models, see price list.

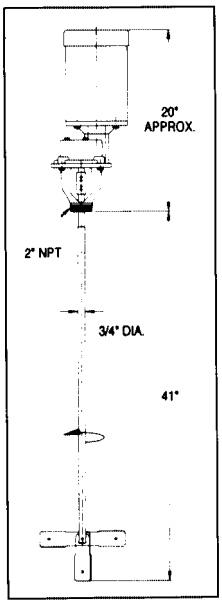

Series HGL



Series DT, 420 rpm

Features

- Mounts to the tank or optional universal bracket.
- 316SS propeller folds to fit through 2-in. opening; opens to 9-in. operating diameter.

Model Number	Standard Motor Description	Shaft Diameter
Totally-enclosed fan-cooled (TEFC)		
DT-1.0	1/2 HP-1-115/230	1"
DT-1.2	1/2 HP-3-230/460	1"
DT-2.0	3/4 HP-1-115/230	1"
DT-2.2	3/4 HP-3-230/460	1"
DT-3.0	1 HP-3-230/460	1"
Air motor		
DT-1.4	1/2 HP AIR Air Requirements: 20CFM at 40PSI	1"
DT-3.2	3/4 HP to 1 HP AIR Air Requirements: 30-40CFM at 25-35PSI	1"

For Explosion-proof models, see price list.

Series DT





Optional Series DT bracket adjusts to fit 32" to 50½" wide containers

MODEL DTA aluminum
MODEL DTS steel

Series RAB, 350 rpm

Features

- Mounts to 2-in. coupling or flange.
- 316SS propeller folds to fit through 2-in. opening; opens to 9-in. operating diameter.
- 1/3 HP and 1/2 HP single-phase TEFC units supplied with 8 feet of cord and 3 prong plug.

Model Number	Standard Motor Description	Shaft Diameter
Totally-enclosed fan-cooled (TEFC)		
RAB-2.0	1/3 HP-1-115/230	¾"
RAB-2.2	1/3 HP-3-230/460	¾"
RAB-3.0	1/2 HP-1-115/230	¾"
RAB-3.2	1/2 HP-3-230/460	¾"
RAB-5.0	3/4 HP-1-115/230	¾"
RAB-5.2	3/4 HP-3-230/460	¾"
RAB-6.0	1 HP-1-115/230	¾"
RAB-6.2	1 HP-3-230/460	¾"
Air motor		
RAB-4.0	1/2 HP AIR Air Requirements: 20CFM at 40PSI	¾"
RAB-7.0	3/4 HP to 1 HP AIR Air Requirements: 30-40CFM at 25-35PSI	¾"

For Explosion-proof models, see price list.

Series RAB

