
Model 986 Portable Housing Option

For 2500 and 2600 Series Controls

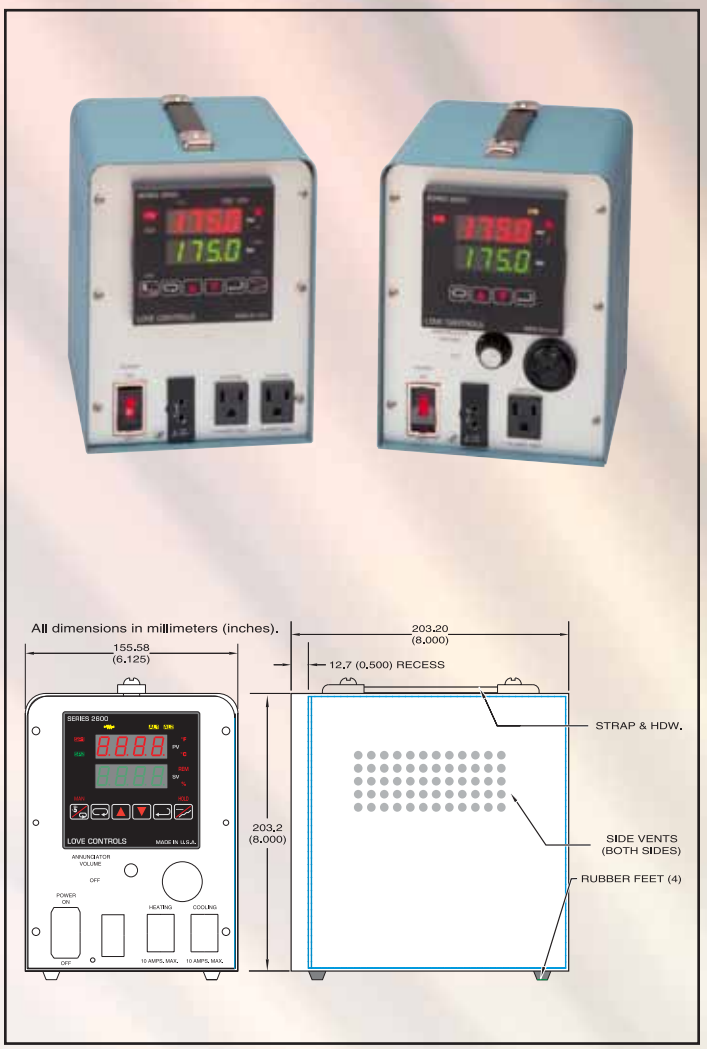

The option 986 portable housing allows use of either of these popular and powerful 1/4 DIN controls as a portable or bench top control. Designed for rugged use, the 986 option allows operation on any standard US 3-prong outlet.

FEATURES

- 10 Amp 120 VAC Outlet on Front Panel
- On-off Switch with Pilot Lamp
- Combination Jack for Standard or Mini Size Thermocouple Plugs
- Self Storing 4 Foot Power Cord
- Optional Alarm has Audible Signal with Volume Control

SPECIFICATIONS

Control Output Ratings: Relay, 10A @ 120 VAC resistive.

Dimensions: 6.125 x 8.0 x 8.0˝ (155.6 x 203.2 x 203.2 mm).

Outlets: US Standard, three prong grounded. Single Set Point units have outlets for both normally open and normally closed contacts.

Alarm: Units equipped with alarm include an aural alarm with front mounted volume control.

Supply Voltage: 120 VAC. Connects with US standard grounded three prong plug. Outlet must be rated for minimum 10A service.

Environmental: Designed for indoor bench top use. Cabinet is open to air and is not dust or splash resistant.

MODELS

Model	Controller Used	Input	Description
25013-986J	25013	Type J T/C	Single Set Point
25013-986K	25013	Type K T/C	Single Set Point
26130-986J	26130	Type J T/C	Single Set Point with Alarm

For Specifications on control unit see the Series 2600 and the Series 2500.

MOD-TRONIC INSTRUMENTS LIMITED
1 Delta Park Blvd, #12 Brampton, ON L6T 5G1
Tel 905-457-6322 or 1-800-794-5883
Fax 905-457-4716 or 1-800-830-7122
sales@mod-tronic.com www.mod-tronic.com