
Industrial & HVAC

Thermocouples and RTD's

Sheath – 316 stainless steel standard

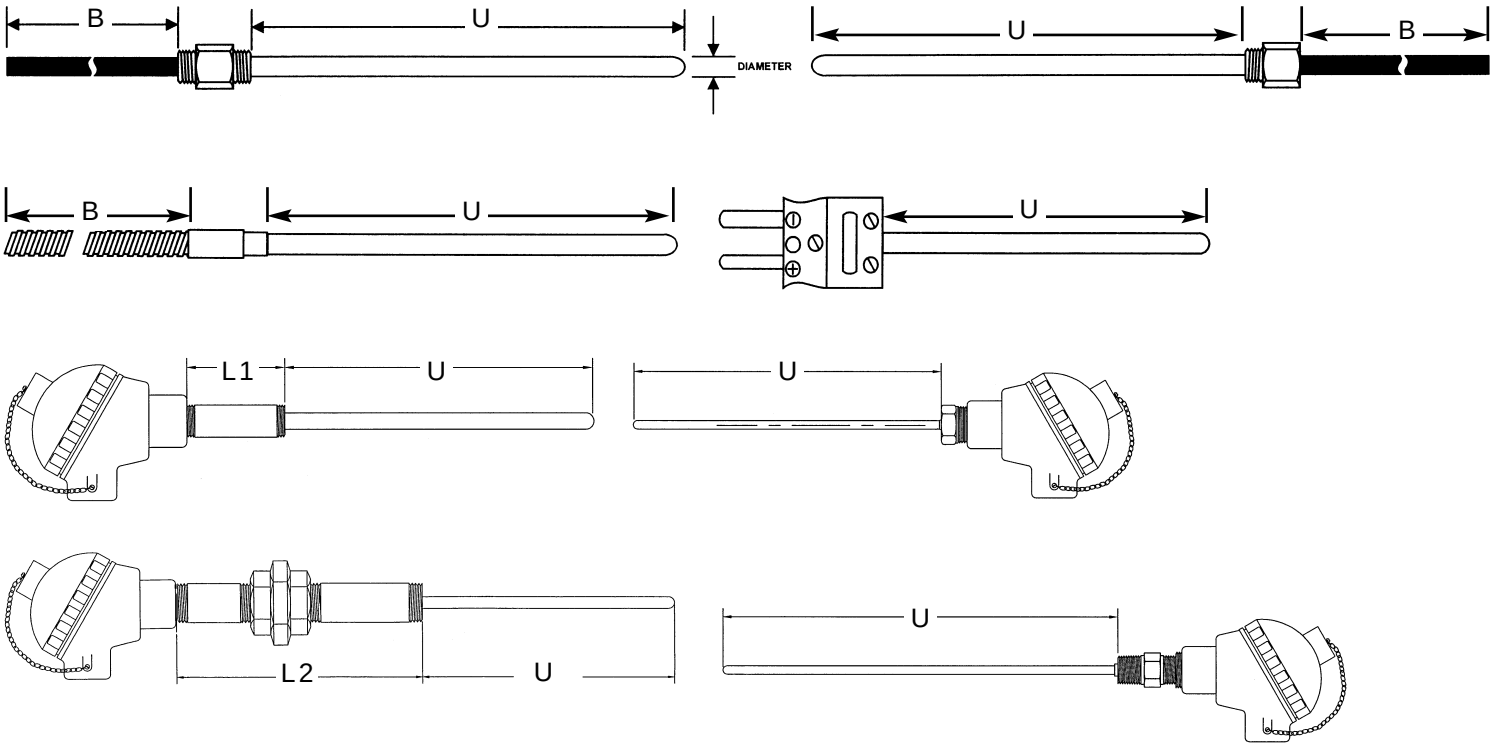

Industrial & HVAC Product Specifications & Options

To order: For each item required, specify the appropriate **codes** or **measurements** from each of the columns below.

Product	Sensor	Probe Length (in.)	Sheath Dia.	Junction	Lead Length (in.)	Lead Type	Termination	Process Connection	Options
A51	1. **J** 2. **JJ**-duplex 3. **K** 4. **KK**-Duplex 5. **T** 6. **TT**-Duplex 7. **RTD** (200°C) 8. **RTDD**-Duplex (200°C) 9. **RT4** (400°C) 10. **RT44** Duplex (400°C) **SP SPECIAL**	U=Specify	1.**1/16"** 2.**1/8"** 3.**3/16"** 4. **1/4"** 5.**5/16"** 6. **3/8"**	**E**-Exposed **G**-Grounded **U**-Ungrounded **3**-3 wire **4**-4 wire	B=Specify N=None	**N**-None **FB**-Fiberglass solid **GS**-Fiberglass Stranded **SB**-Stainless braid over fiberglass **FH**-Flex armour over fiberglass stranded **T**-Teflon solid **TT**-Teflon stranded **P**-PVC solid **PS**-PVC stranded **SP**-Special	**N**-None *Male plug *Female jack **ST**-Strip Leads **SL**-Spade Lugs ***Head Types** **I**-Cast iron **AL**-LG cast AL **ALE**-Cast AL Explosion **FDA**-FDA compliant plastic **E**-Epoxy coated AL **FDAF**-FDA compliant flip top *See page 15 for Selection	**N**-None *__BB2__-1/2" NPT brass *__S2__-1/2" NPT steel *__SS2__-1/2" NPT stainless *__BB4__-1/4" NPT brass *__S1__-1/4" NPT steel *__SS1__-1/4" NPT stainless **FL**-Flange mount **L1**-2" **L2**-4.5" *See page 14 for additional process connectors	**S**-Spring loaded *__T__-Transmitter (ready) **I**-Inconel sheath **304**-304ss sheath **A**-Armour cover leads **B**-Ceramic block **C**-NIST traceable **D**-No transition *See page 16-17 for available temp. transmitters (in-head or rail)
Example: A51	7	3	3	3	120	P	SL	N	S

Toll Free: (800) 567-8686 Tel: 905 477-2133 Fax: (905) 477-4219 Website: www.alphacontrols.com