
Jetstream®


UNx™ Fluid End



- Increase your pressure up to 40,000 PSI
- Replace a damaged or costly fluid end
- Bolt-on installation
- For all popular waterblasters

The Waterblast Superstore **800-231-8192**

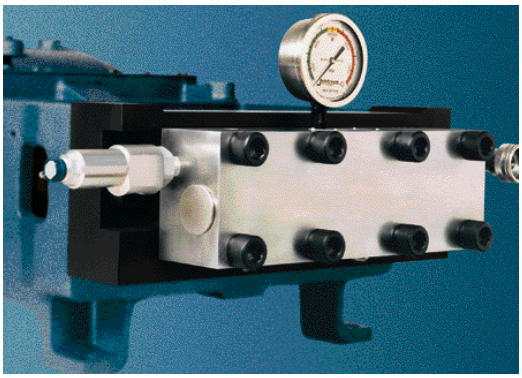






Jetstream UNx™ Fluid End


Engineered for Performance, Flexibility and Maximum Uptime

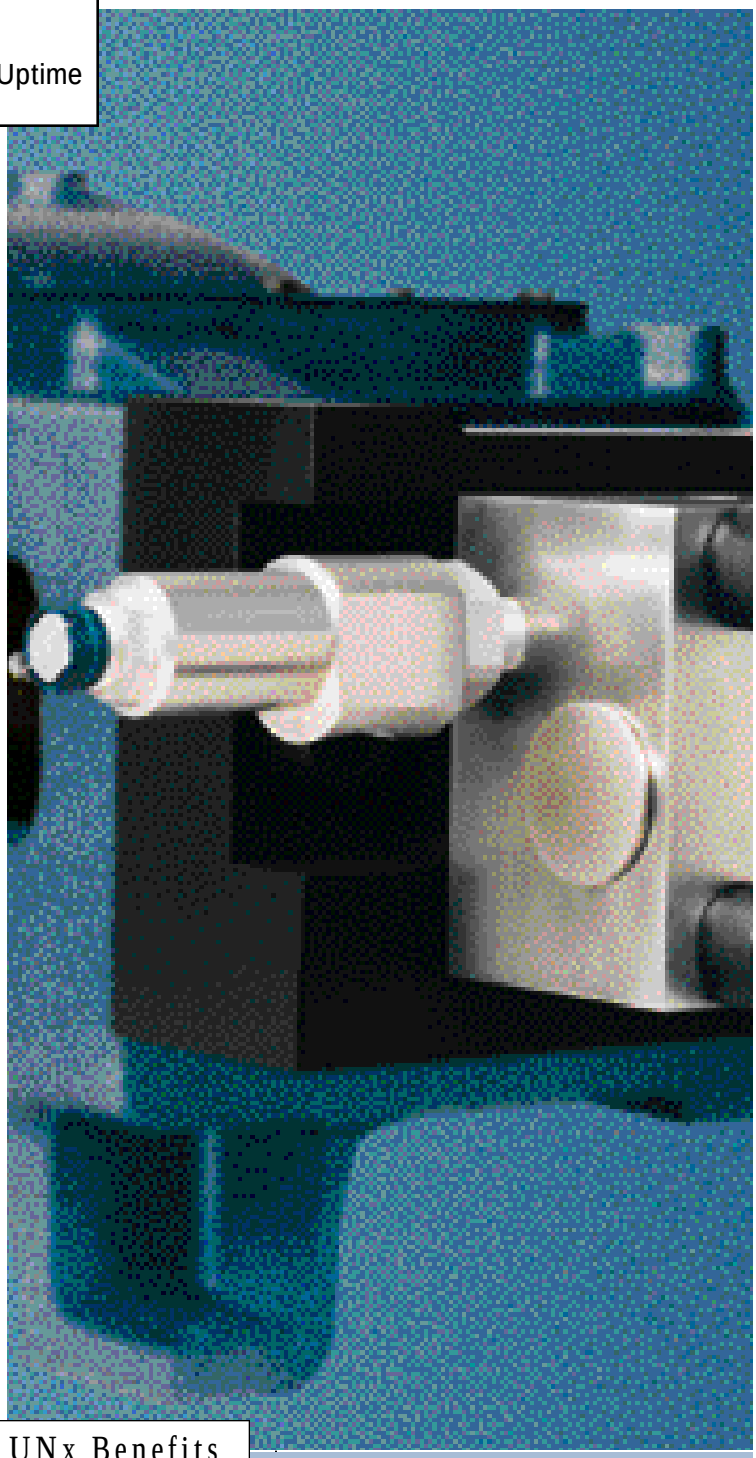


If you need to replace a damaged fluid end or want to increase the operating range of your equipment, the UNx Fluid End is your most cost-effective solution. The UNx has been designed to deliver superior performance, greater flexibility in the field, maximum uptime and significantly reduced maintenance.

90% of maintenance on a waterblast unit is on its pump's fluid end. Since its wear components have been simplified and combined into a cartridge form, the UNx is easy to maintain, even while on the job. Operators can perform maintenance without incurring excessive downtime, eliminating the need for back-up equipment or shop-only maintenance.

Jetstream's long-life plunger packing, Uni-Valve in line valves and simple on site pressure conversions gives it unparalleled simplicity, versatility and reliability.

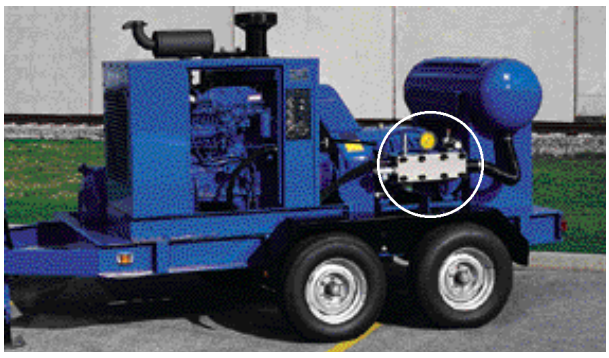


UNx Benefits



Uni-Pak Plunger Packing Set

- One piece packing/one piece brass
- Tapered packing for longer life
- Automatically water lubricated/no oil or pump needed
- All work completed from rod box

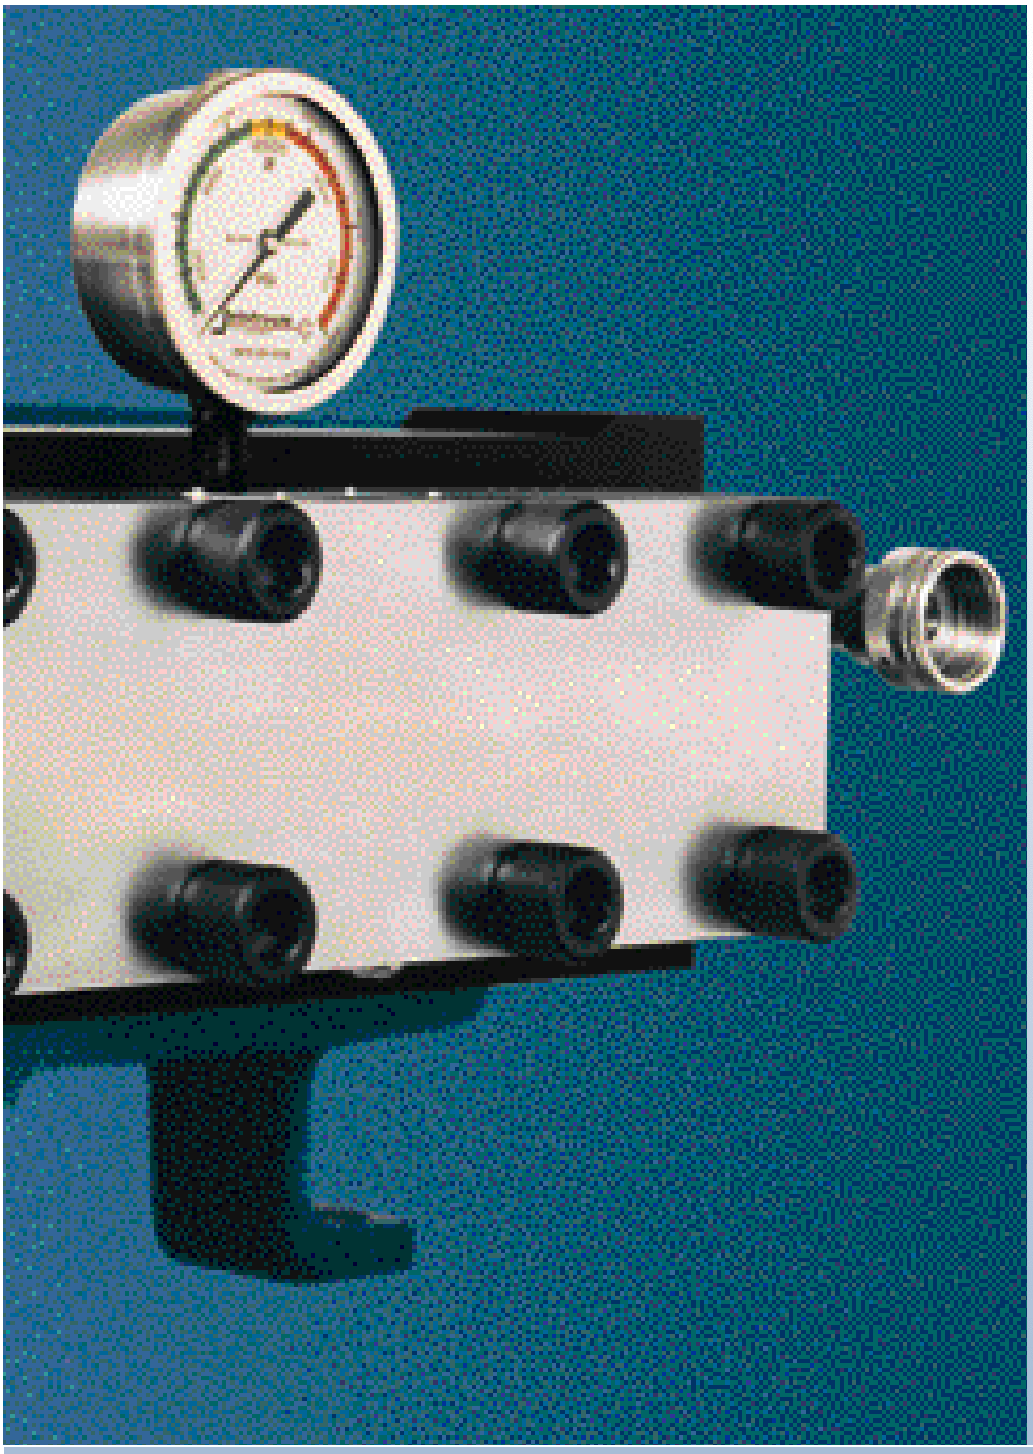


Fewer Parts, Fewer Problems

Fewer parts in the UNx increases reliability and reduces maintenance by as much as 50%. The UNx has only 37 parts . . . regardless of its pressure rating. Compare the simplicity of the UNx with the complex fluid ends of other manufacturers.


Ours

37 Parts

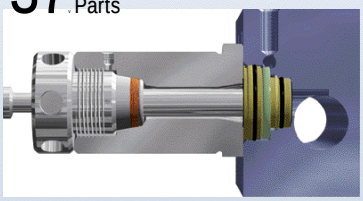


Theirs*


81 Parts




89 Parts



104 Parts




*Based on quantities given in respective manufacturer's service manuals.



In-Line Uni-Valve Cartridge

- High volumetric efficiency for all pressures
- “slip-fit” for easy access
- No special tools required
- Completely repairable and serviceable
- All seals monitored by weep hole
- Swing-down hinged manifold allows full access to components




On Site Pressure Conversion

- Up to 40,000 psi
- Allows for high pressure/ low volume or high volume/ low pressure
- Convert in the field without excessive downtime
- Allows one pump to handle a variety of applications

The UNx Advantage – Available in Three Configurations

As Bolt–on Fluid End Replacement for Other Waterblast Pumps*




Butterworth74/300
Weatherford FE85



Butterworth L77



Butterworth L375



Butterworth L450/200




Wheatley HP 125
Tritan 5127



NLB 10150 &10200



NLB10125
Weatherford FE145
WBD-150N




NLB 1012/D

*Available for other pumps not shown. Consult factory for details.

As Standard on all Jetstream Bareshaft Pumps


- A wide variety of pumps to meet your pressure and flow needs.
- Replace old, worn-out pumps
- Build your own system
- Utilize your existing engine and skid
- Available in sizes up to 300 HP and 40,000 psi
- Installation and assembly instruction provided
- Simple, safe and easy to maintain

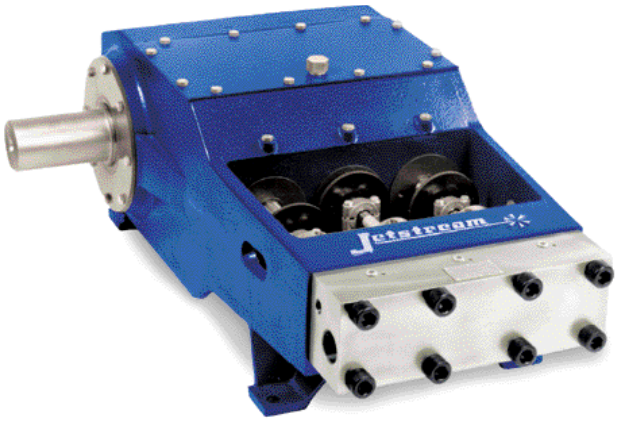

As Standard on all Jetstream Units

- Choose from diesel, electric, propane or gas
- Select skid mount, 4-wheel steerable, gooseneck trailer or cart



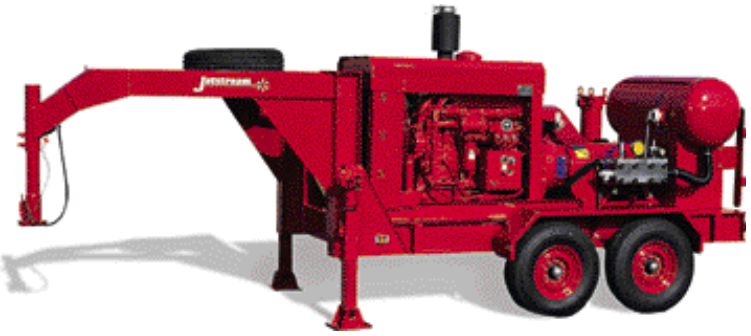

Jetstream ENVIRONMENTAL PRODUCTS GROUP

Jetstream of Houston, Inc.
4930 Cranswick, Houston, TX 77041
(713) 462-7000 (800) 231-8192
(713) 462-JETS Fax
www.waterblast.com

Specifications subject to change without notice.
Jetstream® is a registered trademarks of Jetstream of Houston, Inc.
Effective 9/99 Printed in U.S.A.
©1999 Jetstream of Houston, Inc.