SG Swivel


A Rugged, Versatile Rotary Swivel


Applications

- Tube lancing machines
- Waterblast equipment
- Floor and surface cleaners
- High pressure hose reels
- Hydro-demolition
- Rotary nozzles

Features

- 0° or 90° inlet port
- Easily maintained high pressure seal
- Three heavy duty ball bearings
- Stainless steel construction
- Flow capacity of 50 - 110 gpm (190 - 420 l/min) possible
- Low torque, easy to rotate
- Operating pressure to 20 Kpsi, 1380 bar

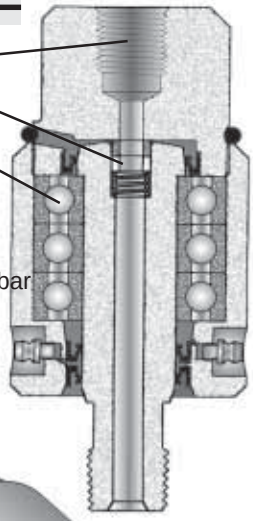

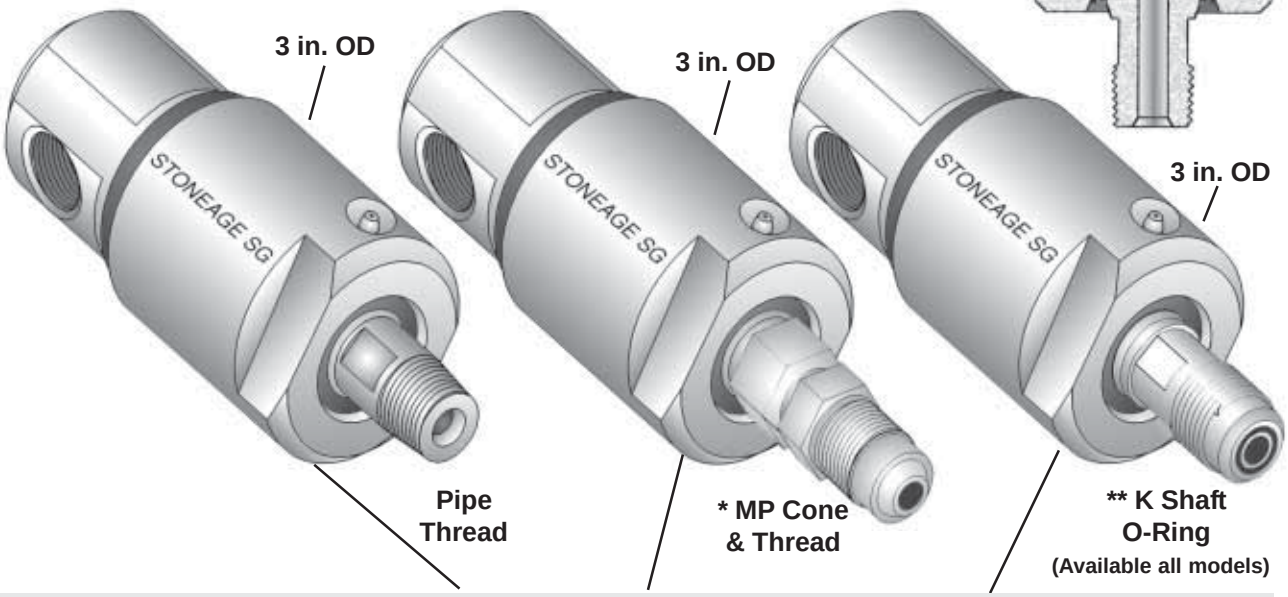

SPECIFICATIONS	SG P8P8	SG P12P12-M	SG A12AV12	SG A16A16	SG CCN P12K	SG CCN A12K
Max. Pressure	15 Kpsi 1000 bar	15 Kpsi 1000 bar	20 Kpsi 690 bar	20 Kpsi 1380 bar	15 Kpsi 1000 bar	20 Kpsi 1380 bar
Rotation Speed, Max.	600 rpm	500 rpm	600 rpm	500 rpm	2,000 rpm	2,000 rpm
Flow Rating	2.3 Cv	5.0 Cv	2.0 Cv	5.0 Cv	2.3 Cv	2.0 Cv
Flow Capacity	50 gpm 190 l/min	110 gpm 420 l/min	50 gpm 190 l/min	110 gpm 420 l/min	50 gpm 190 l/min	50 gpm 190 l/min
Inlet Port	1/2 npt	3.4 npt	3/4 MP*	1 MP*	3/4 npt	3/4 MP*
Shaft Connection	1/2 npt	3/4 npt	3/4 MP*	1 MP*	K **	K **
Length Overall	6.6 in. 17 cm	6.6 in. 17 cm	7.9 in. 20 cm	9.0 in. 23 cm	7.0 in. 17 cm	7.0 in. 20 cm
Weight	8.4 lb 3.8 kg	8.4 lb 3.8 kg	8.8 lb 4.0 kg	8.8 lb 4.0 kg	8.4 lb 3.8 kg	8.4 lb 4.0 kg
Seal Type	1/2 in. OD Plastic	5/8 in. OD Plastic	1/2 in. OD Plastic	5/8 in. OD Plastic	Carbide	Carbide

Maintenance Kits & Tools

- **SG 600 Service Kit -** SG-P8P8 & SG-A12AV12
- **SG 600-M Service Kit -** SG-P12P12-M & SG-A16A16
- **SG 600-H -** SG-P16P12-H
- **SG 600-CCN Service Kit -** SG-CCN models
- **SG 610 Overhaul Kit -** SG-P8P8 & SG-A12AV12
- **SG 610-M Overhaul Kit -** SG-P12P12-M & SG-A16A16
- **SG 610-H Service Kit -** SG-P16P12-H
- **SG 610-CCN Overhaul Kit -** SG-CCN models

STONEAGE® WATERJET TOOLS
Durango, Colorado Phone 970-259-2869
www.stoneagetools.com FAX 970-259-2868

© 10/02