

Performance Specifications

RATIO:	1:1
MAXIMUM G.P.M. (LPM):	47 (178)
DISPLACEMENT GALLONS (Liters) PER CYCLE:	.170 (.64)
AIR INLET:	1/4" NPTF (f)
FLUID INLET:	ANSI Class 150, 1" Pipe Flange
FLUID OUTLET:	ANSI Class 150, 1" Pipe Flange
MAX. OPERATING PRESSURE PSI (bar):	120 (8.3)
SUSPENDED SOLIDS MAX. DIA. IN. (mm):	1/8-inch (3.2)
WEIGHT - LBS. (Kg):	20.2 (9.2) Polypropylene 28.5 (12.9) Kynar® (PVDF) For Cast Iron center section models, add 8.5 lbs. (3.81 kg.)
MAX. DRY SUCTION LIFT:	15 ft. (Rubber fitted)


PERFORMANCE CURVES

6661XX-XXX-C 1" NON-METALLIC DIAPHRAGM PUMP

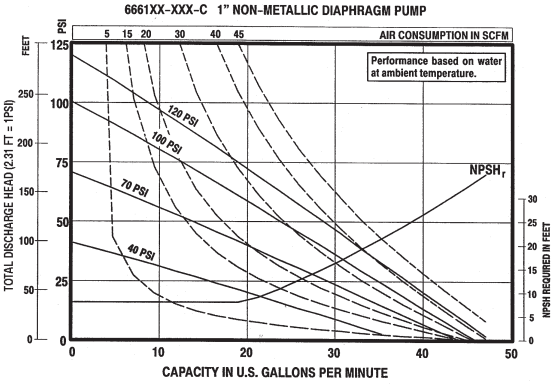

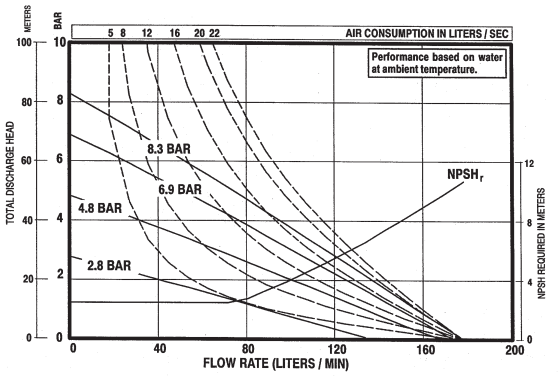

Dimensional Data

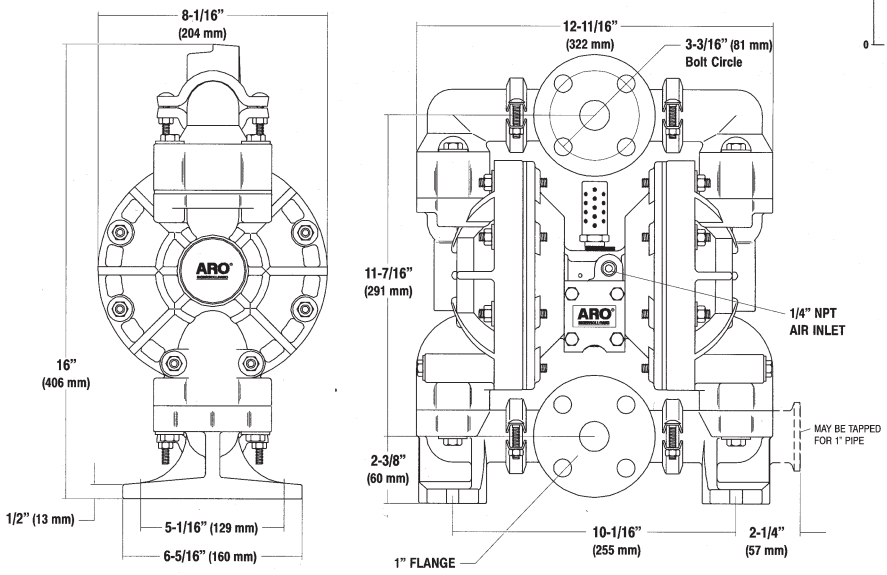

Accessories

Recommended Filter/Regulator

(See Page 38)

Filter / Regulator: P29221-610

67078 - Polypropylene Flange Kit 1" NPT (F)



P29221-610

For complete airline connection kit, see page 34, item "B".
Pulsation Dampener, see page 24.

For Diaphragm Pump Accessories see pages 34-36.

For recommended key models, refer to the ARO diaphragm pump price book (Form 2240-2). If the specific model you seek is not in the price book, consult the factory for further selection assistance.

Ordering

Best Selling Models / *6661A3-3EB-C, 6661A3-344-C, 6661B3-344-C, 6661A4-444-C*

All hardware is 300 Series Stainless Steel.

Base Model					Air Motor	Wetted Parts		Check Valve Seats	Ball Check/ Diaphragm	
6	6	6	1		X	X	-	X	X	X
1" Pump					A Aluminum B Cast Iron	3 Polypropylene 4 Kynar (PVDF)		3 Polypropylene 4 Kynar (PVDF) 8 Stainless Steel (400, hardened)	22 Nitrile/Nitrile 33 Viton/Viton 44 Teflon/Teflon EB Santoprene/Santoprene	

Perfect for aggressive chemicals

Get in the ZONE

ARO | One Aro Center | P.O. Box 151 | Bryan, Ohio 43506-0151
(419) 636-4242 | (419) 633-1674 Fax | www.arozone.com