
Pump Performance

Air Inlet Pressure Range . . . . . 30 - 120 PSI (2 - 8.3 bar)
Fluid Pressure Range. . . . . 1200 - 4800 PSI (81.6 - 326.5 bar)
Max. Rec’d Cycles Per Minute . 60
Displacement Per Cycle . . . . . 14.5 in^3 (237.6 cm^3)
Cycles Per Gallon (Liter) 16 (4.2)
Flow @ 60 Cycles / Minute. . . . 3.7 GPM (13.9 lpm)
Noise Level @ 60 Psi . . . . . 89.8 db(A)

Pump Specifications

Lower Pump Material . . . . . 316 Stainless Steel
Plunger Material . . . . . See “Plunger Options” Below
Cylinder Material. . . . . See “Plunger Options” Below
Air Motor. 66523-B
Motor Repair Kit 66614
Motor Diameter. . . . . 8”
Stroke . . . . . 6”
Air Inlet . . . . . 3/4” NPT(F)
Exhaust Port. . . . . 1-1/4” NPT(F)
Two-Ball Pump Model 66300-X4X
Lower Pump Repair Kit 637305-X43
Material Inlet . . . . . 1” NPT(F) 2” NPT(M)
Material Outlet . . . . . 1” NPT(F)
Weight. . . . . 68.1 lbs. (30.9 kgs.)

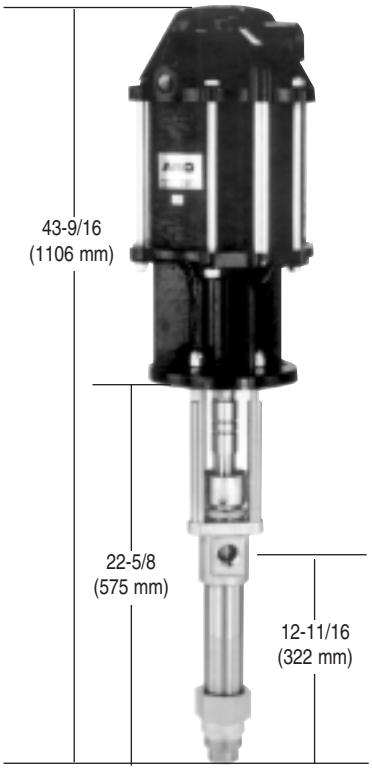

650883-X4X-B

Ordering

6 5 0 8 8 3 - X 4 X - B

Packings
3 : Teflon
C : UHMW-PE
G : UHMW-PE/Leather Staggered
P : UHMW-PE/Teflon Staggered (Upper), UHMW-PE (Lower)
R : Teflon/UHMW-PE Staggered (Upper), Teflon (Lower)

Plungers
D : 17-4 S. S. Hard Chrome Plated
G : 17-4 S.S. “Ultra” Coated

Accessories

Air F/R/L:	28353
Airline Oil:	62274
Air Motor Muffler:	92460
Wet Sol:	66333-B
Floor/Follower Adapter:	67136
Rams:	Page 14
Floor Mounts:	65138

