
Pump Performance

Air Inlet Pressure Range . . . . . 30 - 90 PSI (2 - 6.1 bar)
Fluid Pressure Range. . . . . 3450 - 1,350 PSI (91.8 bar)
Max. Rec’d Cycles Per Minute . 60
Displacement Per Cycle . . . . . 59.9 in^3 (981.5 cm^3)
Cycles Per Gallon (Liter) 3.8 (1.01)
Flow @ 60 Cycles / Minute. . . . 15 GPM (56.7 lpm)
Noise Level @ 60 Psi . . . . . 82 db(A) w/muffler

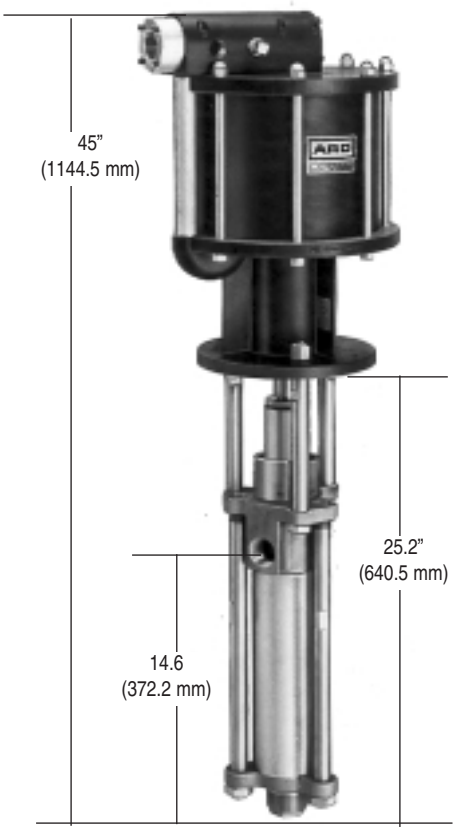

613123-XXF-C

Pump Specifications

Lower Pump Material . . . . . 304 Stainless Steel
Plunger Material . . . . . 15-5 Stainless Steel (Chrome Plated)
Cylinder Material. . . . . 15-5 Stainless Steel (Chrome Plated)
Air Motor. 66651-B
  Motor Repair Kit 637110
  Motor Diameter. . . . . 10”
  Stroke . . . . . 6”
  Air Inlet . . . . . 3/4” NPT(F)
Lower Pump End Series. 66942-XXF
  Lower Pump Repair Kit 637211-XXX
Material Inlet . . . . . 2” NPT(M)
Material Outlet . . . . . 1-1/4” NPT(F)
Weight. . . . . 125 lbs. (56.8 kgs.)

Ordering

6 1 3 1 2 3 - X X F - C

Packings

C6 : UHMW-PE
K3 : CG-Filled Teflon with, Buna N Energizer
L6 : Mineral-Filled Teflon
P6 : UHMW-PE/Teflon (Upper), UHMW-PE (Lower)
R6 : Teflon/UHMW-PE (Upper), Teflon (Lower)

Accessories

Air F/R/L:	28353
Wall Mount:	66542
Airline Oil:	62274
Muffler:	66718
Wet Sol:	66333-B

