
Pump Performance

Air Inlet Pressure Range . . . . . 30 - 120 PSI (2 - 8.3 bar)
Fluid Pressure Range. . . . . 270 - 1350 PSI (18.3 - 91.8 bar)
Max. Rec'd Cycles Per Minute . 75
Displacement Per Cycle . . . . . 11 in^3 (180.2 cm^3)
Cycles Per Gallon (Liter) 21 (5.5)
Flow @ 60 Cycles / Minute. . . . 2.8 GPM (10.5 lpm)
Noise Level @ 60 Psi . . . . . 80 db(A)

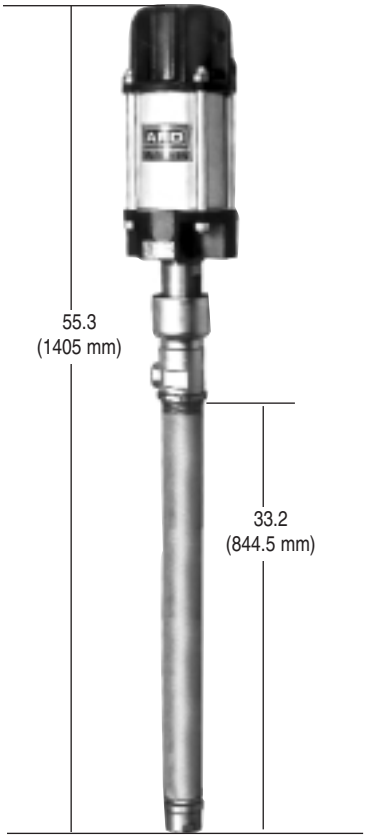

650409
650409-4

Pump Specifications

Lower Pump Material . . . . . 316 Stainless Steel
Plunger Material . . . . . 316 Stainless Steel
Cylinder Material. . . . . Stainless Steel
Air Motor. 65444-B
Motor Repair Kit 61268
Motor Diameter. . . . . 4-1/4"
Stroke . . . . . 4"
Air Inlet . . . . . 1/2" NPT(F)
Lower Pump Series . . . . . 65106 for 650409
. . . . . 65106-4 for 650409-4
Lower Pump Repair Kit . . . . . 637010 for 650409
. . . . . 637010-4 for 650409-4
Material Inlet . . . . . 1-1/4" NPSM(F)
Material Outlet . . . . . 3/4" NPT(F)
Weight. . . . . 45 lbs. (203 kgs.)

Ordering

6 5 0 4 0 9 Packings: Teflon (Upper & Lower)
6 5 0 4 0 9 - X

Packings
4 : UHMW-PE (Upper & Lower)

Accessories

Air F/R/L:	C28241-810
Wall Mount:	66100
Airline Oil:	62274
Muffler:	91790
Wet Sol:	66333-B

