
Pump Performance

Air Inlet Pressure Range . . . . . 30 - 120 PSI (2 - 8.3 bar)
Fluid Pressure Range. . . . . 1350 - 5400 PSI (92.8 - 367.3 bar)
Max. Rec’d Cycles Per Minute . 60
Displacement Per Cycle . . . . . 7.5 in^3 (122.9 cm^3)
Cycles Per Gallon (Liter) 30.9 (8.1)
Flow @ 60 Cycles / Minute 1.9 GPM (7.2 lpm)
Noise Level @ 60 Psi . . . . . 84.8 db(A)

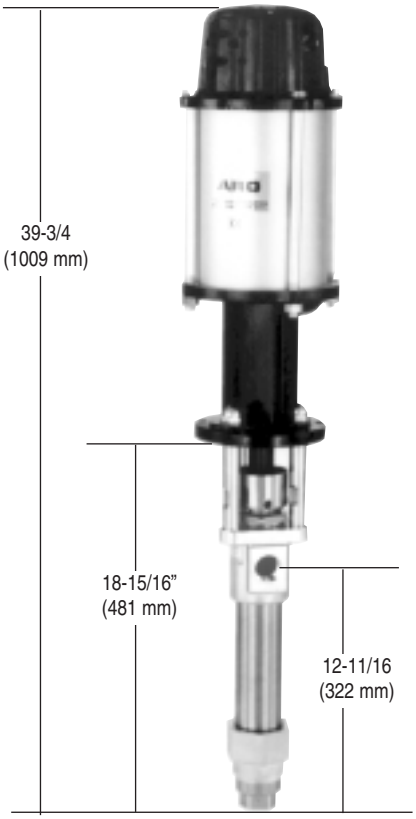

650684-X4X

Pump Specifications

Lower Pump Material . . . . . 316 Stainless Steel
Plunger Material . . . . . See “Plunger Options” Below
Cylinder Material. . . . . See “Plunger Options” Below
Air Motor. 65665-B
Motor Repair Kit 61355
Motor Diameter. . . . . 6”
Stroke . . . . . 6”
Air Inlet . . . . . 1/2” NPT(F)
Two-Ball Pump Model 66301-X4X
Lower Pump Repair Kit 637306-X43
Material Inlet . . . . . 1” NPT(F) 2” NPT(M)
Material Outlet . . . . . 1” NPT(F)
Weight. . . . . 46.2 lbs. (21 kgs.)

Ordering

6 5 0 6 8 4 -X 4 X

Packings
- **3** : Teflon
- **C** : UHMW-PE
- **G** : UHMW-PE/Leather Staggered
- **P** : UHMW-PE/Teflon Staggered (Upper), UHMW-PE (Lower)
- **R** : Teflon/UHMW-PE Staggered (Upper), Teflon (Lower)

Plungers
- **3** : 17-4 S. S. Hard Chrome Plated
- **B** : 17-4 S.S. “Ultra” Coated

Accessories

Air F/R/L:	C28241-810
Airline Oil:	62274
Air Motor Muffler:	91790
Wet Sol:	66333-B
Wall Mounts:	66100
Floor/Follower Adapter:	67136

