
Pump Performance

Air Inlet Pressure Range . . . . . 30 - 90 PSI (2 - 6.1 bar).
Fluid Pressure Range. . . . . 2700 PSI (183.6 bar) Max.
Max. Rec’d Cycles Per Minute . 60
Displacement Per Cycle . . . . . 40.4 in^3 (662 cm^3)
Cycles Per Gallon (Liter) 5.7 (1.5)
Flow @ 60 Cycles / Minute. . . . 10.5 GPM (39.6 lpm)
Noise Level @ 60 Psi . . . . . 88 db(A) w/muffler

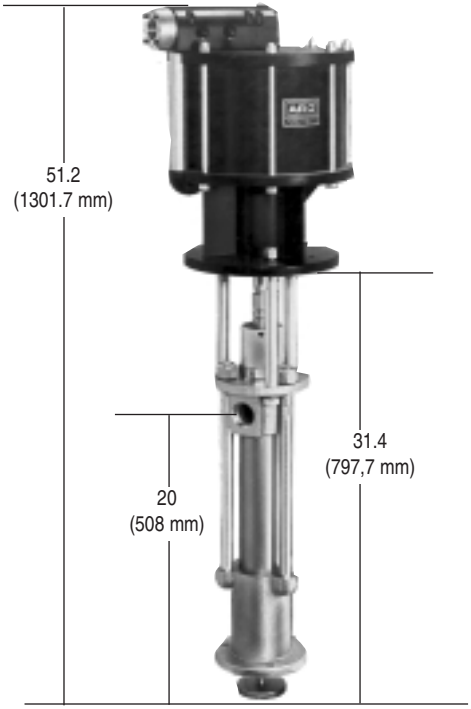

650971-XXE-C

Pump Specifications

Lower Pump Material . . . . . Carbon Steel
Plunger Material . . . . . Carbon Steel
Cylinder Material. . . . . Carbon Steel (Nickel Plated)
Air Motor. 66506-B
Motor Repair Kit 637112
Motor Diameter. . . . . 12”
Stroke . . . . . 6”
Air Inlet . . . . . 3/4” NPT(F)
Exhaust Port. . . . . 1-1/4” NPT(F)
Chop Check Pump Model. 66236-XXE-B
Lower Pump Repair Kit 637128-XX4-B
Material Inlet . . . . . Bolted Flange
Material Outlet . . . . . 1-1/2” NPT(F)
Weight. . . . . 147 lbs. (66.8 kgs.)

Ordering

6 5 0 9 7 1 -X X E - C

Packings / Springs

34 : Glass-Filled Teflon (Upper & Lower), Multiple Wave Spring
C4 : UHMW-PE (Upper & Lower), Multiple Wave Spring
F4 : UHMW-PE/Leather Staggered (Upper), UHMW-PE (Lower), Multiple Wave Spring
J3 : Polyurethane (Upper), UHMW-PE (Lower), No Spring
P4 : UHMW-PE/Teflon Staggered (Upper), UHMW-PE (Lower), Multiple Wave Spring
R4 : Teflon/UHMW-PE Staggered (Upper), Teflon (Lower) Multiple Wave Spring

Accessories

Air F/R/L:	28353
Airline Oil:	62274
Air Motor Muffler:	66718
Wet Sol:	66333-B
Floor Mount:	65139
Rams	Page 14

