
Pump Performance

Air Inlet Pressure Range . . . . . 30 - 120 PSI (2 - 8.3 bar)
Fluid Pressure Range. . . . . 1290 - 6450 PSI (87.7 - 438.7 bar)
Max. Rec'd Cycles Per Minute . 60
Displacement Per Cycle . . . . . 2.8 in^3 (45.8 cm^3)
Cycles Per Gallon (Liter) 82.5 (21.7)
Flow @ 75 Cycles / Minute .9 GPM (3.4 lpm)
Noise Level @ 60 Psi . . . . . 80 db(A)

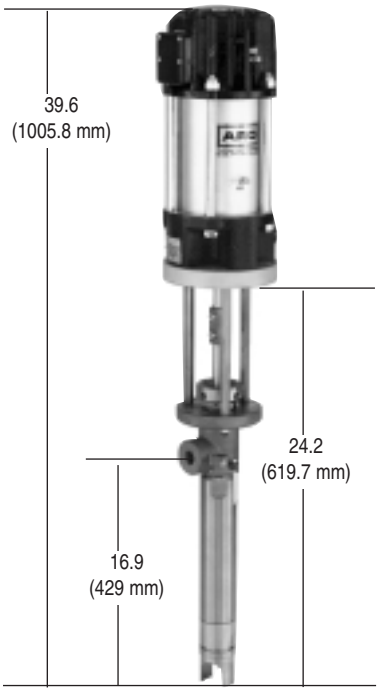

67120-P4X

Pump Specifications

Lower Pump Material . . . . . Carbon Steel
Plunger Material . . . . . 17.4 Stainless Steel (Chrome Plated)
Cylinder Material. . . . . Carbon Steel (Nickel Plated)
Air Motor. 65440
Motor Repair Kit 61268
Motor Diameter. . . . . 4-1/4"
Stroke . . . . . 4"
Air Inlet . . . . . 1/2" NPT(F)
Exhaust Port. . . . . 1/2" NPT(F)
Lower Pump End Series:
Model 67120-P43 . . . . . 67100-P43
Model 67120-P48 . . . . . 67100-P48
Lower Pump Repair Kits:
Model 67120-P43 . . . . . 637290-P43
Model 67120-P48 . . . . . 637290-P48
Material Inlet . . . . . Follower Plate Mounted
Material Outlet . . . . . 1/2" NPT(F)
Weight. . . . . 44 lbs. (20 kgs.)

Ordering

6 7 1 2 0 - P 4 X

Packing
P : UHMW-PE/Teflon Staggered (Upper), UHMW-PE (Lower)

Plungers
3 : HD SS w/chrome plating and standard lower packing
8 : HD SS w/chrome plating and cup type lower packing

Accessories

Air F/R/L:	C28241-810
Airline Oil:	62274
Air Motor Muffler:	91790
Wet Sol:	66333-B
Follower Plate:	Page 17
A.S.A.P. Packages:	650540-1
	650542-1

