Performance Specifications

1/2", 3/4" & 1" Ports




28367

Max. Inlet Pressure:	200 PSIG (13.8 bar)
Operating Temperature Range:	0° to 125° F (-18° to 52° C)
Filter Element:	40 Micron
Bowl:	Polycarbonate with metal guard
Lubricator:	Combination Fog-Type / Drop-Type

Ordering

PORT SIZE NPT	MODEL	WEIGHT LBS. (kg)	COMPONENTS FILTER	COMPONENTS LUBRICATOR	PIPE NIPPLE
Select the basic model number which represents the port size desired. If other options are desired, order each component separately.					
1/2"	**28342**	6.61 (3)	25341-020	26341-020	Y27-54-C
3/4"	**28352**	6.52 (2.96)	25351-020	26351-020	Y27-55-C
1"	**28362**	6.13 (2.78)	25361-020	26361-020	Y27-56-C

GRAPHIC SYMBOL




NOTE: Shipped unassembled. For assembled unit, change the last digit from 2 to 7. Example: 28347


Dimensional Data

Heavy Duty Series

Filter-Regulator-Lubricator

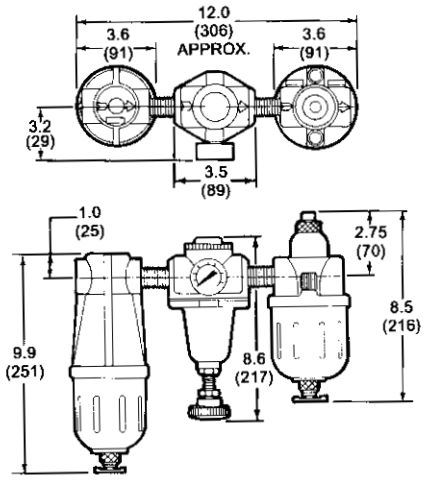

Filter-Regulator

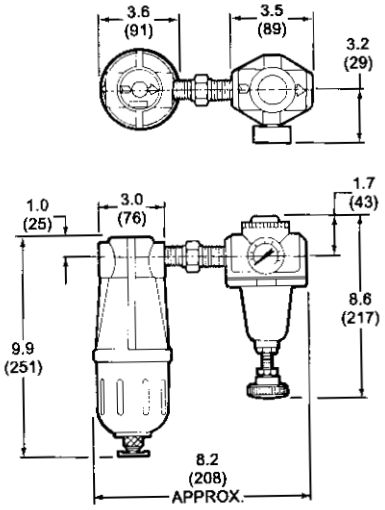

Filter-Lubricator

