Performance Specifications

Filter-Regulator-Lubricator

Max. Inlet Pressure:	150 PSIG (10.4 bar)
Operating Temperature:	0° to 125°F (-18° to 52°C)
Filter Element:	20 Micron
Pressure Range in Regulator:	5 to 125 PSIG (.4 to 8.6 bar)
Gauge:	0 to 150 PSI
Gauge Port:	1/8 NPT



Lockout Valve 104253-2

C28121-800




Ordering

Select the basic model number which represents the port size and bowl option required. if other options are required, order each unit separately. Units are shipped assembled. For BSP threads, consult factory.

Port Size NPT	Models With T-Mounts	Models Without T-mounts	Weight lbs. (kg.)	Components Filter	Regulator	Lubricator
Push Drain • Polycarbonate Bowl with Bowl Guard						
1/8"	C28111-800	C28112-800	5.54 (1.88)	F25111-200	R27111-600	L26111-100
1/4"	C28121-800	C28122-800	5.42 (2.46)	F25121-200	R27121-600	L26121-100
Automatic Drain • Polycarbonate Bowl with Bowl Guard						
1/8"	C28111-801	C28112-801	5.54 (1.88)	F25111-201	R27111-600	L26111-100
1/4"	C28121-801	C28122-801	5.42 (2.46)	F25121-201	R27121-600	L26121-100

Notes: **Order lock-out valve separately and attach to filter inlet with clamp kit (104263).**

To order modular model with pipe nipples, place a "3" in the sixth position of the model number. Example: C28XX3-XXX

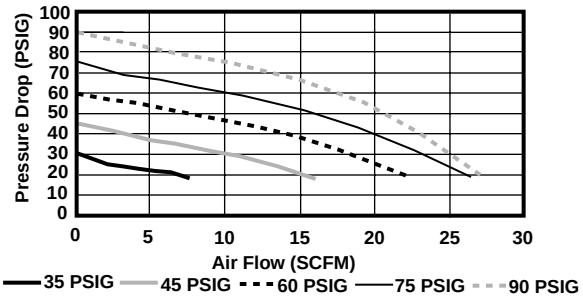

Dimensional Data

Dimensions Inches (mm)

