
Features


The modular FRL with pipe nipple capability!

Individual components have threaded ports, allowing either modular configurations ***or*** pipe nipple connections.



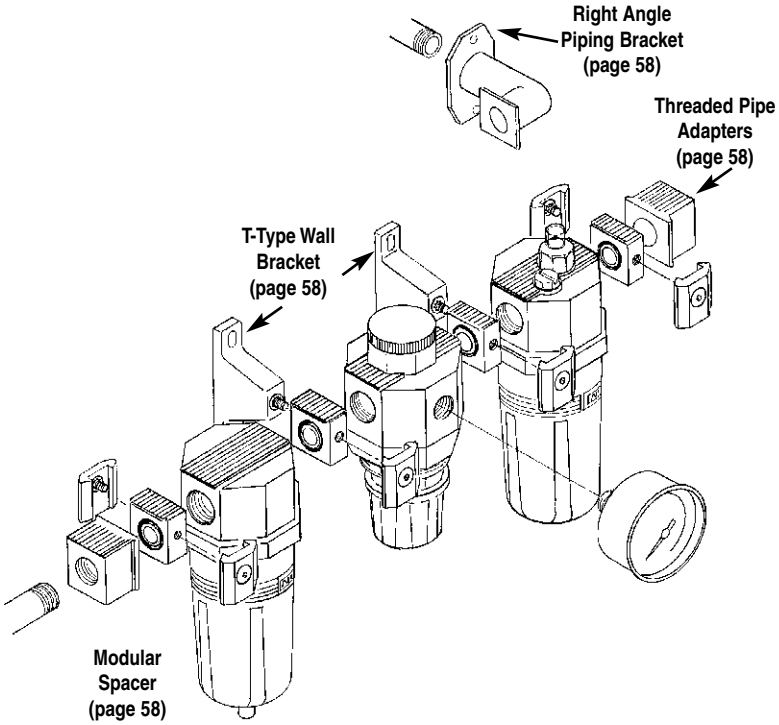

Modular Connection

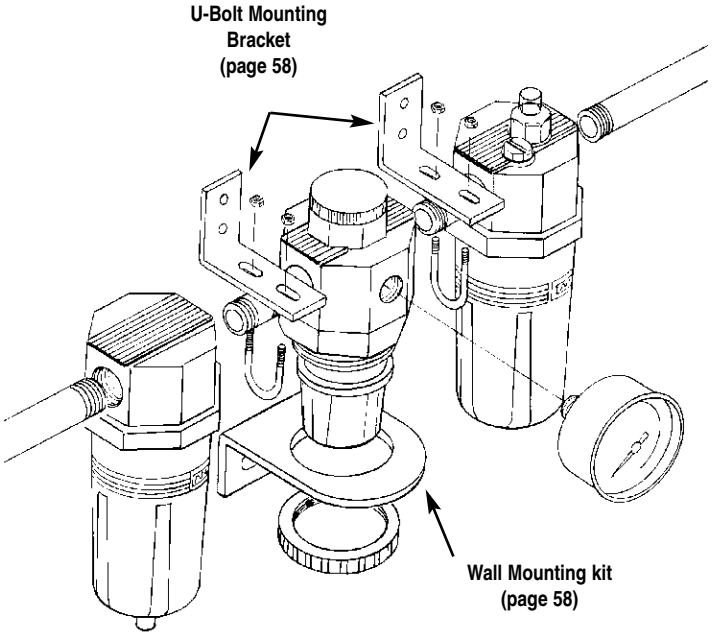



Pipe Nipple Connection

Performance Specifications


1/4", 3/8" & 1/2" Ports

Max. Inlet Pressure:	Polycarbonate Bowl - 150 PSIG (10.4 bar) Metal Bowl - 175 PSIG (12 bar)
Operating Temperature Range:	Polycarbonate Bowl - 0° to 125° F (-18° to 52°C) Metal Bowl - 0° to 175°F (-18° to 79°C)
Filter Element:	40 micron
Pressure Range in Regulator:	5 to 125 PSIG (.3 to 8.6 bar)
Gauge:	0 to 160 PSI
Gauge Port:	1/4" NPT
Filter Drain:	Manual (standard); Automatic (optional)



C28241-800
(Modular)

GRAPHIC SYMBOL



Ordering


Select the basic model number which represents the port size and bowl option required. Modular models listed include Gauge and "T" Brackets, and are shipped assembled. Pipe nippled models include Gauge and Nipples, and are shipped unassembled. If other options are required, order each unit separately.


For BSP threads, add -B to end of model number.


NOTE: To order modular models without "T" Brackets, place a "2" in sixth position of model number. Example: CXXXX2-XXX. See page 58 for Mounting Brackets for pipe nippled models.

NOTE: Not all menu combinations are valid. See price book to verify.

PORT SIZE NPT	MODELS MODULAR	MODELS *NIPPLED*	WEIGHT lbs. (kg)	COMPONENTS FILTER	COMPONENTS REGULATOR	COMPONENTS LUBRICATOR
Models & Dimensions, in. (mm)						
push drain • metal bowl with sight glass						
1/4"	**C28221-810**	***C28223-810***	5.5 (2.5)	F25221-110	R27221-600	L26221-110
3/8"	**C28231-810**	***C28233-810***	5.4 (2.4)	F25231-110	R27231-600	L26231-110
1/2"	**C28241-810**	***C28243-810***	5.3 (2.4)	F25241-110	R27241-600	L26241-110
push drain • polycarb. bowl with bowl guard						
1/4"	**C28221-800**	***C28223-800***	5.5 (2.5)	F25221-100	R27221-600	L26221-100
3/8"	**C28231-800**	***C28233-800***	5.4 (2.4)	F25231-100	R27231-600	L26231-100
1/2"	**C28241-800**	***C28243-800***	5.3 (2.4)	F25241-100	R27241-600	L26241-100
automatic drain • metal bowl with sight glass						
1/4"	**C28221-811**	**	5.5 (2.5)	F25221-111	R27221-600	L26221-110
3/8"	**C28231-811**	**	5.4 (2.4)	F25231-111	R27231-600	L26231-110
1/2"	**C28241-811**	**	5.3 (2.4)	F25241-111	R27241-600	L26241-110
automatic drain • polycarb bowl with bowl guard						
1/4"	**C28221-801**	**	5.5 (2.5)	F25221-101	R27221-600	L26221-100
3/8"	**C28231-801**	**	5.4 (2.4)	F25231-101	R27231-600	L26231-100
1/2"	**C28241-801**	**	5.3 (2.4)	F25241-101	R27241-600	L26241-100

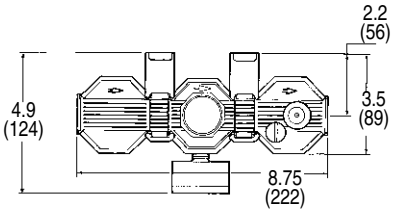

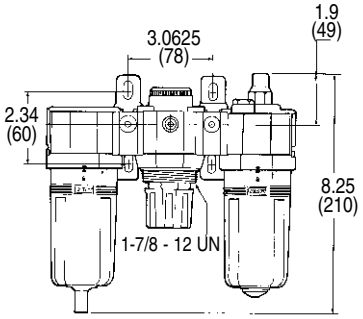



NOTE: Three piece modular models include (2)**104171** T-Brackets and (1) **100067** Gauge. Pipe Nippled models include (1) **100067** Gauge and (2) appropriate size pipe nipples. For pipe nippled FRL combo units with automatic drain, order individual filter, regulator and lubricator components and pipe nipples.