Performance Specifications

1/4", 3/8" & 1/2" Ports

Max. Inlet Pressure:	Polycarbonate Bowl - 150 PSIG (10.4 bar) Metal Bowl - 175 PSIG (12 bar)
Operating Temperature Range:	Polycarbonate Bowl - 0° to 125° F (-18° to 52°C) Metal Bowl - 0° to 175° F (-18° to 79°C)
Filter Element:	40 micron
Filter Drain:	Manual (standard); Automatic (optional)
Pressure Range in Regulator:	5 to 125 PSIG (.3 to 8.6 bar)
Gauge:	0 to 160 PSI
Gauge Port:	1/4" NPT



C28241-610 (Modular)

Ordering

Select the basic model number which represents the port size and bowl option required. Modular models listed include Gauge and "T" Brackets, and are shipped assembled. Pipe nippled models include Gauge and Nipple, and are shipped unassembled. If other options are required, order each unit separately.

For BSP threads, add -B to end of model number.


NOTE: To order modular models without "T" Brackets, place a "2" in sixth position of model number. Example: CXXXX2-XXX. See page 58 for Mounting Brackets for pipe nippled models.


NOTE: Not all menu combinations are valid. See price book to verify.




Filter/Regulator Lubricator

PORT SIZE NPT	MODELS MODULAR	MODELS *NIPPLED*	WEIGHT lbs. (kg)	COMPONENTS PIGGYBACK	COMPONENTS LUBRICATOR
Models & Dimensions, in. (mm)					
push drain • metal bowl with sight glass					
1/4"	**C28221-610**	***C28223-610***	4.1 (1.9)	P29221-610	L26221-110
3/8"	**C28231-610**	***C28233-610***	4.0 (1.8)	P29231-610	L26231-110
1/2"	**C28241-610**	***C28243-610***	3.9 (1.8)	P29241-610	L26241-110
push drain • polycarb. bowl with bowl guard					
1/4"	**C28221-600**	***C28223-600***	4.1 (1.9)	P29221-600	L26221-100
3/8"	**C28231-600**	***C28233-600***	4.0 (1.8)	P29231-600	L26231-100
1/2"	**C28241-600**	***C28243-600***	3.9 (1.8)	P29241-600	L26241-100
automatic drain • metal bowl with sight glass					
1/4"	**C28221-611**	**	4.1 (1.9)	P29221-614	L26221-110
3/8"	**C28231-611**	**	4.0 (1.8)	P29231-614	L26231-110
1/2"	**C28241-611**	**	3.9 (1.8)	P29241-614	L26241-110
automatic drain • polycarb bowl with bowl guard					
1/4"	**C28221-601**	**	4.1 (1.9)	P29221-604	L26221-100
3/8"	**C28231-601**	**	4.0 (1.8)	P29231-604	L26231-100
1/2"	**C28241-601**	**	3.9 (1.8)	P29241-604	L26241-100

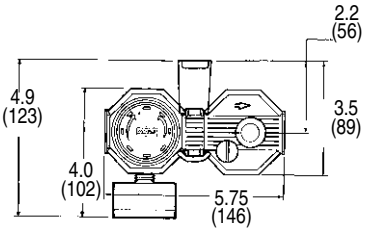

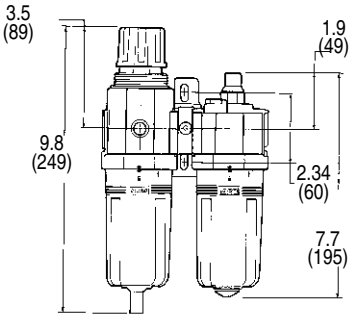



NOTE: Two piece modular models include (1)**104171** T-Brackets and (1) **100067** Gauge. Pipe Nippled models include (1) **100067** Gauge and (1) appropriate sized pipe nipple. For pipe nippled FRL combo units with automatic drain, order individual filter/regulator and lubricator components and pipe nipples.