Features

3/4", 1", 1-1/4 & 1-1/2" Ports

ARO Super-Duty High Flow lubricators are designed for application in compressed air systems where a constant ratio of oil-to-air is desired over widely varying air flows. They provide lubrication to air tools, cylinders, and other air-powered equipment. Recommended for lengthy, complex piping systems or multiple points of lubrication.

- Bodies feature aluminum die-cast construction for corrosion resistance.
- Oil feed adjustment has a screw driver adjustment that offers tamper-resistant capability. Automatic flow sensing delivers oil in proportion to air flow.
- Bowl is aluminum with glass sight gauge and has a spiral ramp thread to permit quick disconnect for easy maintenance.
- Optional quick-fill adapter and fill pump are available for lubricator filling and maintenance. See accessories below.



L26481-110

Performance Specifications

Max. Inlet Pressure:	250 PSIG (17 bar)	**Body:**	Aluminum
Oper. Temp. Range:	0° to 175° F (-18° to 79° C)	**Sight Glass:**	Pyrex
Oil Capacity:	32 oz. (946 ml)	**Seals:**	Buna-N
Weight:	3/4" = 4.60 lbs. (2.09 kg), 1" = 4.30 lbs. (1.95 kg) 1-1/4" = 3.94 lbs. (1.79 kg), 1-1/2" = 3.58 lbs. (1.62 kg)		
***Flow:**	3/4" = 190 SCFM (90 dm^3/s), 1" = 200 SCFM (94 dm^3/s) 1-1/4" = 220 SCFM (104 dm^3/s), 1-1/2" = 220 SCFM (104 dm^3/s)		

* Flow is at 90 PSIG (6.2 bar) inlet and 5 PSIG (.4 bar) pressure drop.


Ordering


Select basic model representing the port size desired. Add number representing filter options required.


PORT SIZE	BASIC MODEL
3/4"	L26451-X X X
1"	L26461-X X X
1-1/4"	L26471-X X X
1-1/2"	L26481-X X X

Adjustment	Bowl Option	Fill Option
1 = Standard	1 = Metal Bowl w/Sight Glass	0 = Standard

Dimensional Data

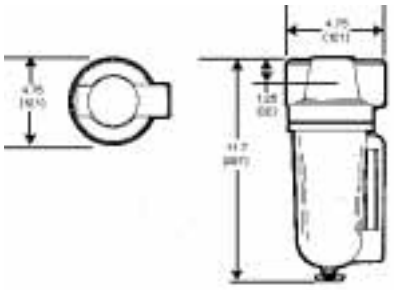

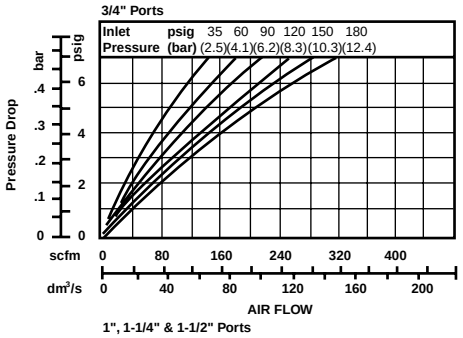

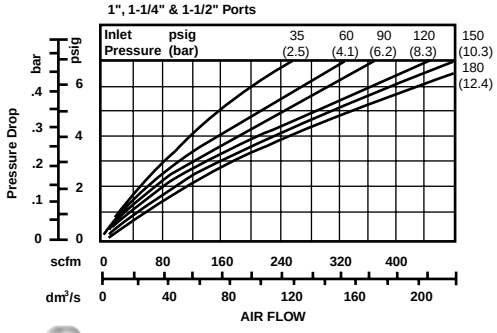

Accessories

MODEL	DESCRIPTION	MODEL	DESCRIPTION
104118	Service Kit	29235	Quick-Fill Adapter (1/8"-27 Threads)
29665	ARO Lubricating Oil. (See page 71).	104115	U-Bolt Mounting Bracket
104124	Sight Feed Dome Kit	104241	Twist Drain Kit
104163	Sight Gauge Kit		



29665



29235