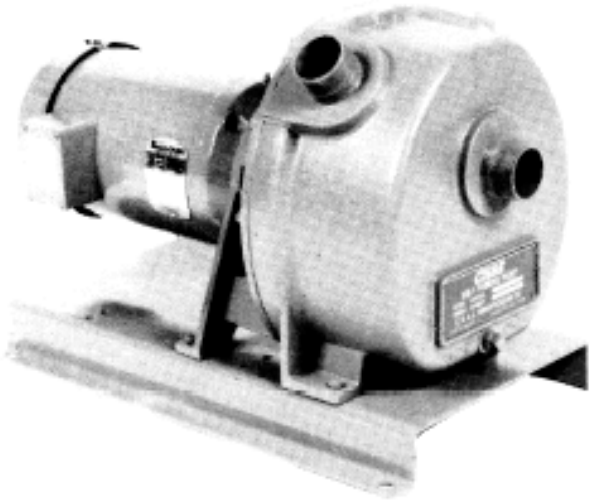



2” & 3”
Self-Priming
Centrifugal Pumps

Electric Power

Backed by CH&E
Limited Warranty

Pump	4338E	4339E
Size	2” x 2” Female NPT	3” x 3” Female NPT
Construction	Aluminum	Aluminum
Impeller	Cast Iron – 5 Vane – Passes ¾” Spherical Solids	Cast Iron – 5 Vane – Passes ¾” Spherical Solids
Volute	Aluminum	Aluminum
Seal	Single Grease Seal – Spring (SS) Loaded Carbon Ceramic Faces	Single Grease Seal – Spring (SS) Loaded Carbon Ceramic Faces
Cover	Aluminum	Aluminum
Gaskets	Rubber	Rubber
“O” Rings	Ethylene-Propylene	Ethylene-Propylene
Suction Elbow	Aluminum	Aluminum
Electric Motor	1.5 HP TEFC	1.5 HP TEFC
Speed	1750 RPM	1750 RPM
Phase	Single/Three	Single/Three
Voltage	Single: 115/230; Three: 230/460	Single: 115/230; Three: 230/460
Dimensions	Skid: 24 x 16 x 18	Skid: 25 x 16 x18
Shipping Weight	Single: 140 lbs.; Three: 150 lbs.	Single: 150 lbs.; Three: 160 lbs.

2” & 3” Self-Priming Centrifugal Pumps

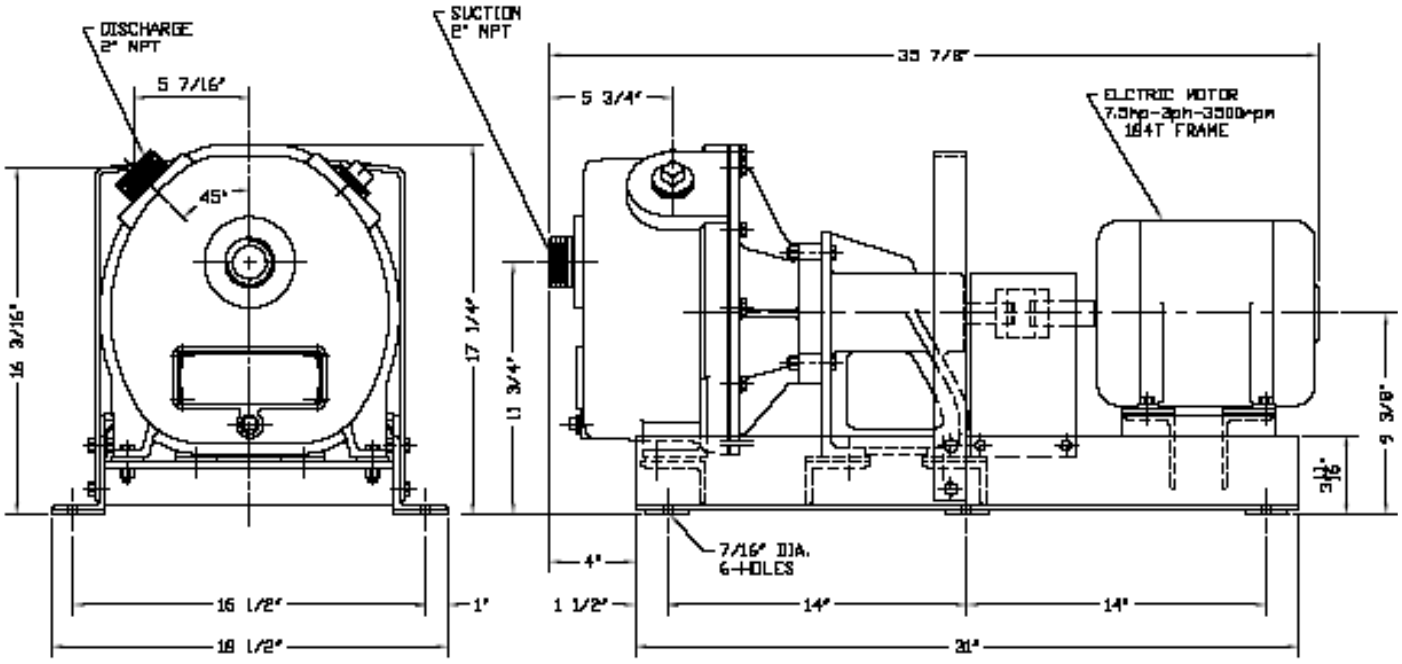

OPTIONAL EQUIPMENT

- **Cast Iron Pump Case**
- **Motor Starter, mounted and wired**
- **Explosion-Proof Motor**
- **Wheel Kit with Handle**

WARNING:
DO NOT USE IN EXPLOSIVE ATMOSPHERE OR FOR PUMPING VOLATILE FLAMMABLE LIQUIDS. CONTACT THE FACTORY FOR EXPLOSION-PROOF MODELS.

