

Available on Skid or Wheels

2” Self-Priming Centrifugal Pump


Gas Engine Powered

Backed
By CH&E
Limited Warranty

Models and Specifications

Pump	4704	4712
Size	2” x 2” Female NPT	2” x 2” Female NPT
Construction	Aluminum	Aluminum
Impeller	Cast Iron – 5 Vane – Passes 1/8” Spherical Solids	Cast Iron – 5 Vane – Passes 1/8” Spherical Solids
Volute	Class 30 Cast Iron	Class 30 Cast Iron
Seal	Single Grease Seal (SS) Loaded Carbon Ceramic Faces	Single Grease Seal (SS) Loaded Carbon Ceramic Faces
Cover	Aluminum	Aluminum
Gaskets	Rubber	Rubber
Suction Elbow	Class 30 Cast Iron	Class 30 Cast Iron
Power	Honda GX240	Briggs 2024
Horsepower	8	8
Fuel Tank Capacity	1.6 gallons	1 gallon
Continuous Runtime	3.9 hours	1.1 hours
Shipping Dimensions – LxWxH – inches	Skid – 27 x 15 x 22	Skid – 27 x 15 x 22
Shipping Weight / Net Weight lbs	Skid – 175/160	Skid – 160/145

2” Self-Priming Centrifugal Pumps

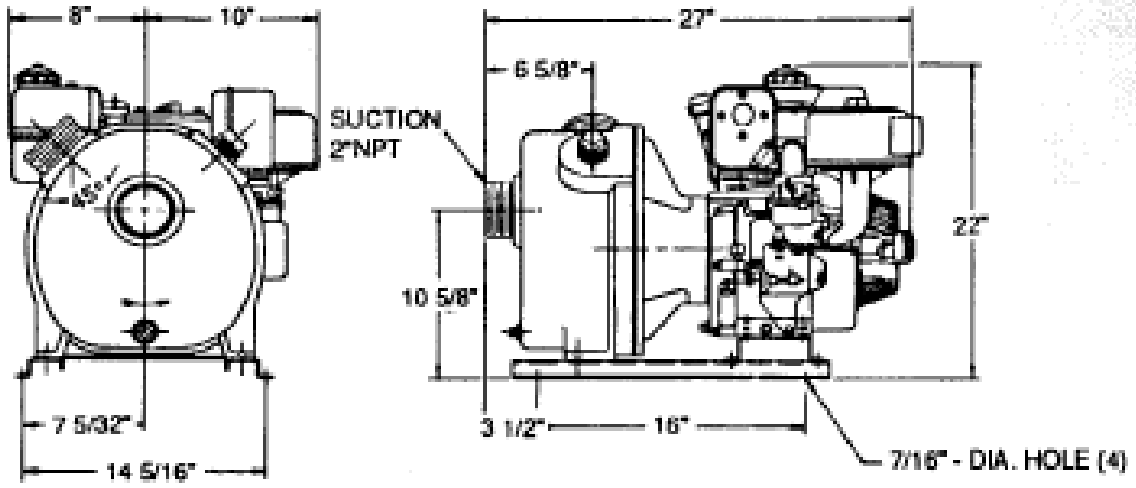

STANDARD EQUIPMENT


- 90° Flanged Discharge Elbow
- Structural Steel Skid Base

STANDARD ON ENGINE

- High Temp. & Low Oil Shutdown
- Hour Meter – Tachometer – Hour Meter
- Ammeter – Oil Pressure Temp. Gauge
- Key Switch

OPTIONAL EQUIPMENT

- Wheel Kit with Handle
- Electric Start, Charging Circuit, Battery Box, and Cables (w/o Battery)

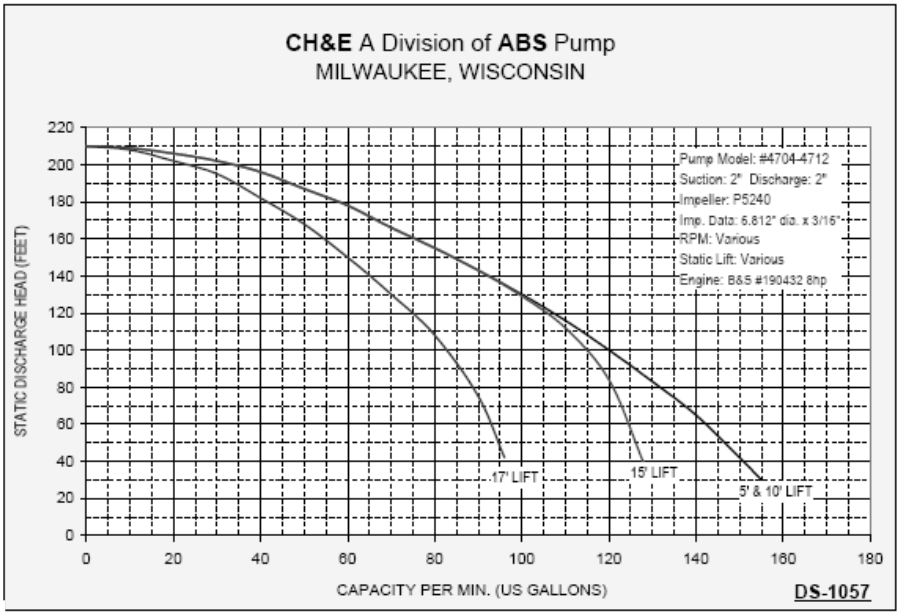

WARNING
DO NOT USE IN EXPLOSIVE ATMOSPHERE OR FOR PUMPING VOLATILE FLAMMABLE LIQUIDS