

Available on wheels or skid

2 Inch
Diesel Diaphragm

Diesel Powered


Backed By CH&E
Limited Warranty

Models and Specifications

MODEL (Aluminum/Cast Iron)	5452/6452	5457/6457
Suction & Discharge	2 inch	2 inch
Max. Suction Lift (feet)	25	25
Max. Discharge Head (feet)	25	25
Power	Hatz 1B20	Yanmar L48EE
Horsepower	6	4.2
Fuel Tank Capacity (US Gal.)	3 Liters (.79)	2.5 Liters (.66)
Continuous Run Time/Tank (Hr.)	3	3
Starting Method	Recoil	Recoil
Shipping Dimensions L x W x H (inches)		
Wheels	42 x 25 x 25	42 x 26 x 26
Skid	39 x 25 x 25	39 x 25 x 26
Shipping Weight (lb.)		
Aluminum Net Wt./Shipping Wt.	170/205	170/205
Cast Iron	220/255	220/255

WARNING
DO NOT USE IN EXPLOSIVE ATMOSPHERE OR FOR PUMPING VOLATILE FLAMMABLE LIQUIDS

2” Diesel Diaphragm Pumps

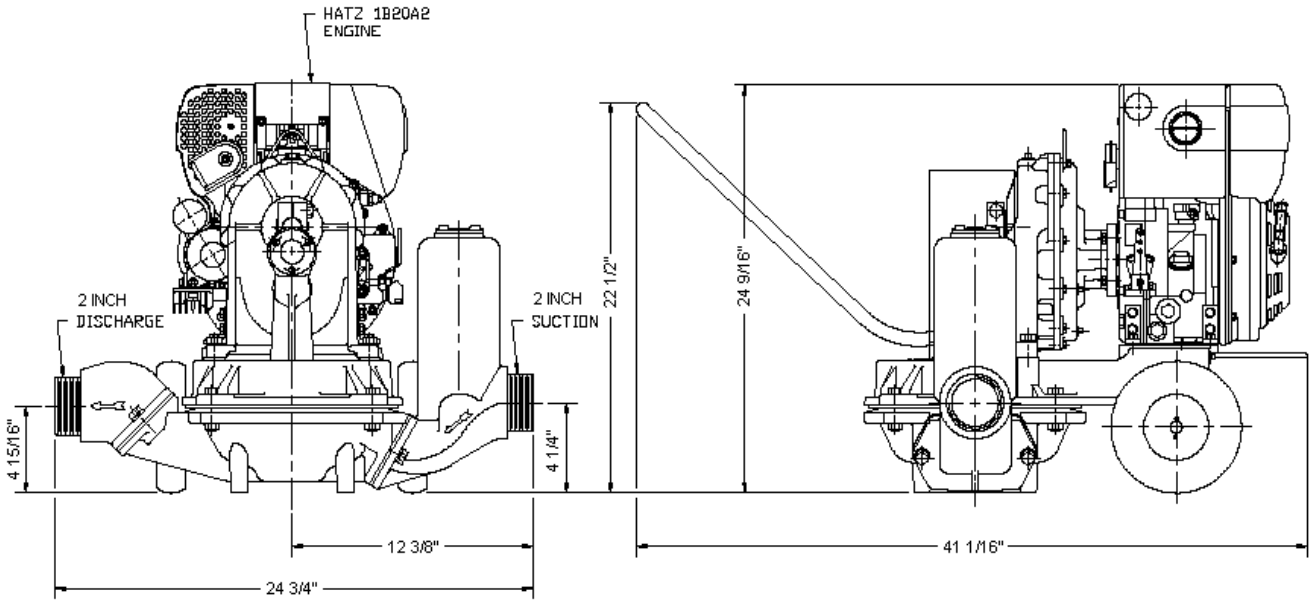

BUILT TO LAST

- Aluminum or Cast Iron wetted ends
- Large opening Flap Valves
- Fast, Sure Self Priming
- Self Cleaning Water Flow
- Enclosed Gears in Oil Bath
- Diaphragm and Valves in Rubber, TPE, Neoprene, Buna and Viton

MORE PRODUCTIVE PUMPING FOR:

- Seepage Dewatering
- Sandy- Muddy- Mucky- Water
- High Suction Lift
- Cleaning Septic Tanks
- Pumping Industrial Waste
- Pumping Marine Tanks
- Small Well Point Systems

