

4 Inch
Diaphragm Pumps

Electric Motor Power

Backed By CH&E
Limited Warranty

Available on trailer, skid, or wheel mounted.


MODEL AND SPECIFICATIONS

Aluminum	5ACE2-1	5ACE2-3
Suction & Discharge	4 inch	4 inch
Max. Suction Lift (feet)	25	25
Max. Discharge Head (feet)	25	25
2 HP. Electric Motor **Frame Size** **Phase** **Voltage (60 Cycle)** **Speed**	TEFC 182T Single 115/230 1750 RPM	TEFC 145T Three 230/460 1750 RPM
Pump Construction	Cast Iron	Cast Iron
Shipping Weight / Net Weight (lbs.) **Wheels** **Skid** **Trailer**	 560/510 510/460 960/910	 560/510 510/460 960/910
Dimensions (L x W x H) inches **Wheels** **Skid** **Trailer**	 53 x 34 x 43 42 x 34 x 43 79 x 50 x 50	 53 x 34 x 43 42 x 34 x 43 79 x 50 x 50


FEATURES:

- All Cast Iron and Steel
- Relief valves in discharge connection to reduce surging
- Waterbox and Valves located in straight line to give self-cleaning action
- Roller Bearing Crankshaft

WARNING
DO NOT USE IN EXPLOSIVE ATMOSPHERE OR FOR PUMPING VOLATILE FLAMMABLE LIQUIDS CONTACT FACTORY FOR EXPLOSION PROOF VERSIONS

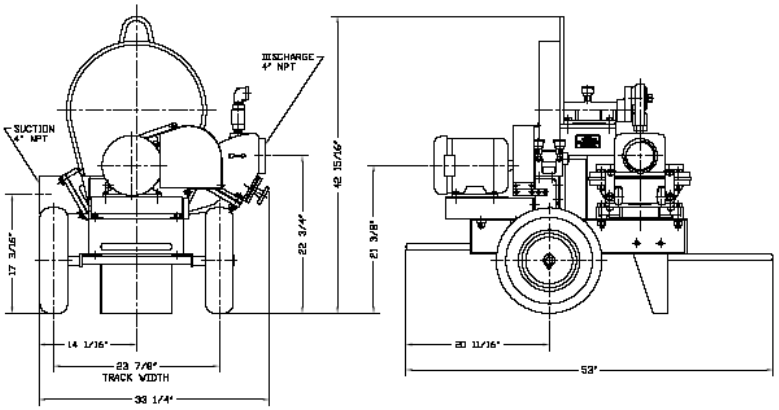

(Wheel Mounted)

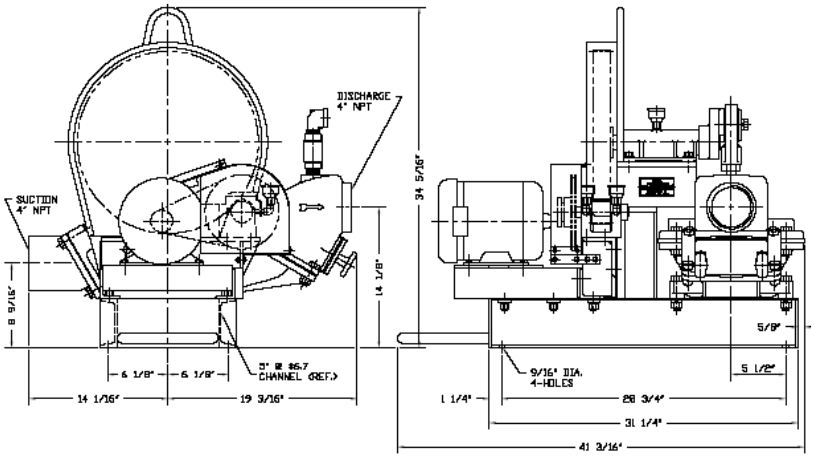

(Skid Mounted)

4 Inch Electric Motor Diaphragm Pumps

STANDARD EQUIPMENT

- Skid Mounting
- Rubber Diaphragm and Flap Valves

OPTIONAL EQUIPMENT

- Manual Motor Starter (mounted and wired)
- A.C. Motor, variable frequency controls
- Dynamic variable speed, D.C. Motor
- Explosion-Proof Motor
- 25 Gallon Tank
- Flange connectors
- Buna N. Diaphragm and Flap Valves
- Neoprene Diaphragm and Flap Valves
- Viton Diaphragm and Flap Valves
- Single Discharge Manifold
- Fenders on trailer mounted units

