

HOSE QUICK DISCONNECT COUPLING

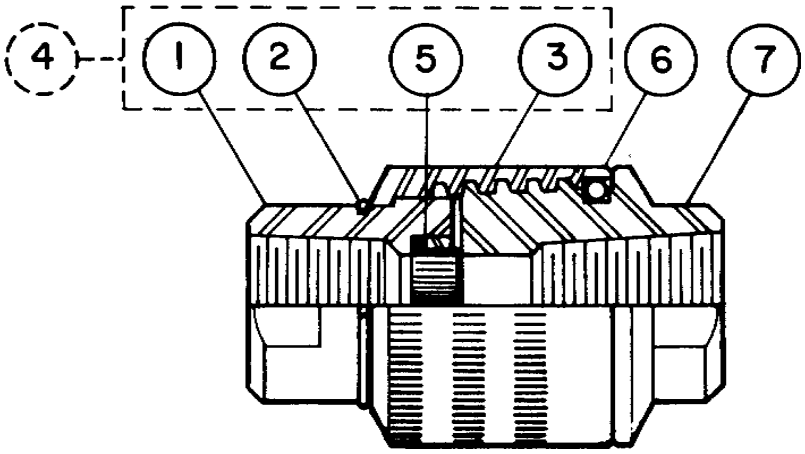


ITEM	QTY	JETSTREAM IMPROVED™ PART NO.	JETSTREAM IMPROVED™ PART NO.	DESCRIPTION
		50733		PLATED STEEL ASSEMBLY
			50001	STAINLESS STEEL ASSEMBLY
1	1	50712	50556	COUPLING HALF, FEMALE
2	1	25690	25690	RING, RETAINER
3	1	50713	50006	NUT
4	1	50756	50729	COUPLING HALF, FEMALE ASSY.
5	1	50698	50698	SEAL, MOLDED
6	1	25657	25657	O-RING, THREAD LOCK
7	1	50711	50009	COUPLING HALF, MALE

UPGRADE TO JETSTREAM'S TWISLOK™ COUPLING




Switch to the toughest quick-connect hose coupling on the market.

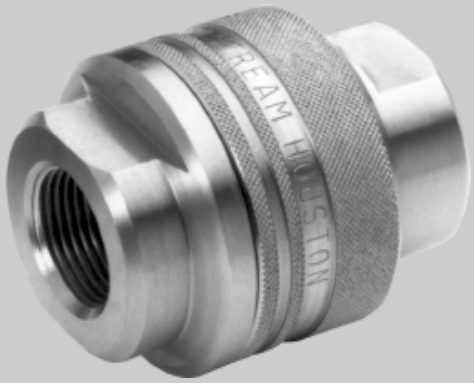

- **Acme threads withstand the roughest field treatment**
- **Heavy-duty cartridge-style seal**
- **Seal surface protected when disconnected**
- **3/8", 1/2" 3/4" and 1" NPT**
- **10,000 and 15,000 psi rated**
- **Stainless steel**

JETSTREAM NO-BLO™ (RUBBER) WATERBLAST HOSE

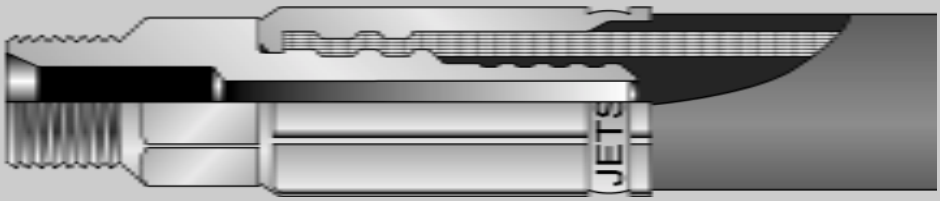

Do not risk serious operator injury from an end fitting blowing off. Use Jetstream NO-BLO™ waterblast hose.

- **NO-BLO™ end fittings that will not blow off, for maximum safety**
- **Operating pressures to 20,000 psi with burst pressures to 50,000 psi**
- **Sizes 1/4" to 1" I.D.**