Teflon Probe
F3S 3/22 L-10 E T

CE


Level control for:

- waxes
- granulates
- paints
- hot-melt adhesives
- chemicals

Technical data:

Material	Teflon(PTFE), nickel-coated brass
Type of protection	IP64 / EN 40050
Mounting position	As desired, vertical position preferred
Permissable ambient temperature	0°C to +130°C
Cable length	1.25 m

Dimensions:

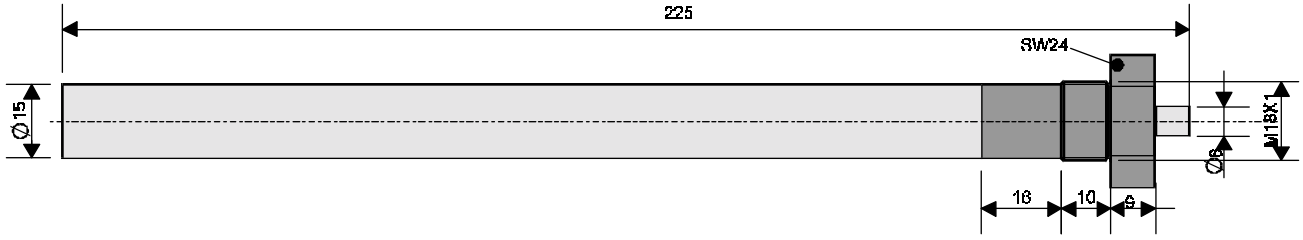

Operating Instructions:

Mounting instructions
The probe is only to be used together with the type V-25-80/120 device. Certain clearances are to be adheredto when two probes are in a single container. The probe cable is not to be laid parallel to the driving cables.

Operation
The scope of use compromises the liquid and solid medium with a maximum temperature of 130°C. During the functional test (setting), it is imperative that the test only be carried out using the medium which was actually called up. During setting, the connected probes must be free of medium which is to be monitored.

Maintenance
The probes are maintenance-free. Devices are only to be repaired or overhauled by the manufacturer.

General
Our devices are of a high technical quality. we reserve the right to make technical alterations which are designed to meet technical progress.

Tippkemper Elektronik GmbH & Co KG
Zum Kreuzweg 12 D-59302 Oelde Tel. +49 (0) 25 29 / 93 01-50 Fax. +49 (0) 25 29 / 93 01-49