MX81 Series

AC SOCKET / PRESSURE TAB MOUNT


TRIMAX Circuit Protectors




SPECIFICATIONS


- **Insulation Resistance**
  100MΩ at 500VDC
- **Dielectric Strength**
  2000VAC / 1 minute
- **Body Material**
  Nylon 66 UL 94V-0
- **Approvals**
  15A, 250VAC: UL and CSA

DIMENSIONS in mm

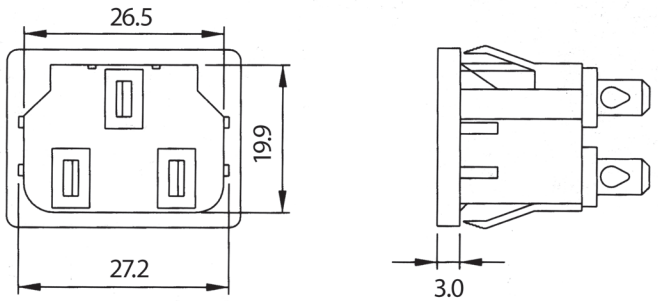








PANEL CUTOUT



Panel Thickness:
0.8–3.0

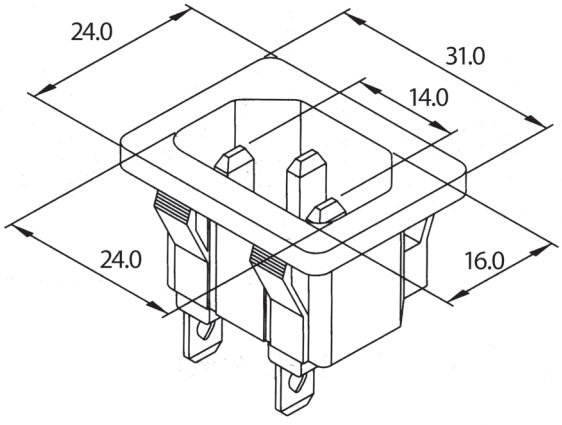

OPTIONS SELECTION

Series select by number	Terminals select by letter	
MX81 AC Sockets with Pressure Tab Mount	**A** .187" (4.8mm) Solder/QC Tabs	
	B .157" (4.0mm) Solder Tabs	
	C .098" (2.5mm) Solder Tabs	
	D .25" (6.3mm) QC Tabs	

Example: MX81 | B

MX81 with .157" (4.0mm) Solder Tabs

TRIMAX Circuit Protectors
A division of Pelco Component Technologies

2747 Route 20 East, Cazenovia, NY 13035
315-655-8476 ■ www.trimaxcb.com