NK
ULTRASONIC LEVEL SWITCH

Flow
Pressure
Level
Temperature
measurement
monitoring
control

N1



- **No Moving Parts**
- **Ryton® (PPS), ABS or Polypropylene**
- **N/O or N/C Switch Function**
- **Easy to Use**
- **High Temperature Version Available (-40°F to 220°F)**

USA
KOBOLD Instruments Inc.
1801 Parkway View Drive
USA-Pittsburgh, PA 15205
+1 412-788-2830
Fax +1 412-788-4890
E-mail: info@koboldusa.com

CANADA
KOBOLD Instruments Canada Inc.
9A Aviation
Pointe-Claire, QC H9R 4Z2
+1 514-428-8090
Fax +1 514-428-8899
E-mail: kobold@kobold.ca

Visit KOBOLD Online at
www.kobold.com


Model:
NK

The NK Ultrasonic Level Switch is used to monitor liquid levels and protect pumps. The ultrasonic function enables the switch to be used wherever traditional monitoring methods fail. The NK can monitor almost all homogeneous liquids regardless of viscosity, density or conductivity.

The NK utilizes a fork-shaped sensor which contains two piezoelectric crystals facing each other. One of the crystals acts as the ultrasonic transmitter, and the other as a receiver. If the air gap between the points of the fork fills with liquid, the ultrasound passes from one crystal to the other. On receiving the signal, the integral electronics activate a relay output. The devices are equipped with an SPDT relay output. The required function (normally open or normally closed) may be selected using the appropriate connections. The relay is activated in the wet state.




Dimensions

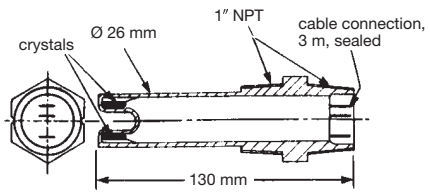

NK Standard sensor with relay output – Technical data:

Material:
NK-5000: ABS Plastic
NK-6000: Polypropylene
NK-7000: Ryton (PPS)
Pressure: Max. 50 PSIG
Operating Temp:
NK-5000/6000: –4°F to 150 °F
NK-7000: -40 to 220°F
Power Input: 18–30 VAC or VDC
Current: 10 mA ± 5 mA dry (DC)
25 mA ± 10 mA wet
Power consumption: 0.6 W at 24 V
1.2 W at max. 30 V
Cable: 10ft., PVC Jacketed
Switch Type: SPDT Relay
Max. Voltage: 100 VAC/VDC
Max. Current: 2 amps
Protection: NEMA 4X/IP65 (cable entry)
Delay: 100 msec dry/wet
0.5–1 sec wet/dry

Function schematic NK-7000

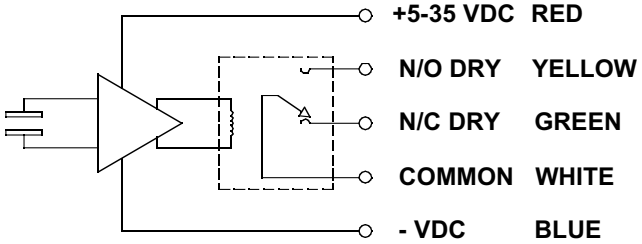

Ordering Information

Material	Description
NK-7000	Ryton (PPS)
NK-5000	ABS Plastic
NK-6000	Polypropylene

Subject to change without prior notice.