
# Compact Electric AutoJet® Spray Gun For Marking and Dispensing

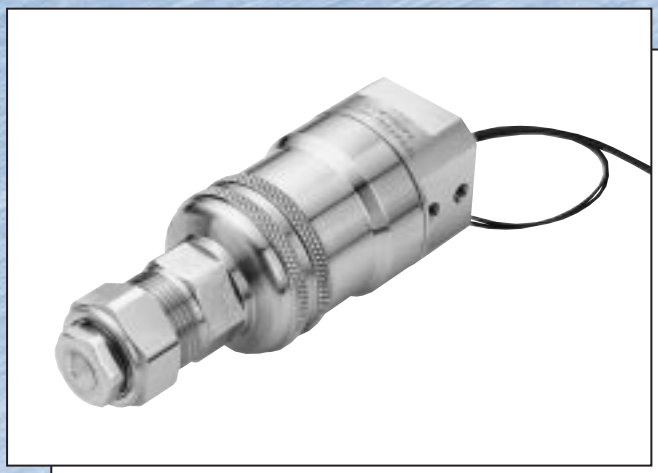


## Typical Applications

- *Marking Glass and Automotive Products*
- *Lubricating Stamping Dies*
- *Lubricating Medical Devices*

The new compact electric AA28JJAU AutoJet spray gun, from Spraying Systems Co., provides an air-atomized spray for precisely controlled marking or sealing. It features a soft, shut-off seat that's located in the fluid cap to provide positive shut-off and a clean and accurate spray. It can be used for continuous spraying or for high-speed cycling — up to 2,000 cycles per minute.

The AA28JJAU AutoJet spray gun has a quick-change fluid module that contains all moving and wear-prone parts to minimize downtime. Spray gun mounting and connections are not disturbed during changeout. Plus, there are no packings in contact with moving parts that can wear and tear. In addition, every spray gun is shipped with an adjusting tool and a seat removal tool to aid in spray gun maintenance.

All fluid wetted parts of the AA28JJAU AutoJet spray gun are constructed of stainless steel for maximum chemical resistance. The in-line spray gun is available in two versions — with a shut-off needle or with a clean-out needle. With the shut-off version, there is a choice of two air caps and five fluid caps. With the clean-out needle, there is a choice of two air caps and one fluid cap.

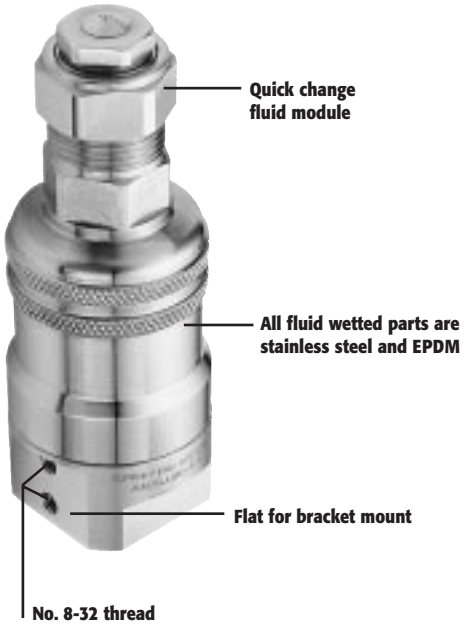


***For precisely controlled spraying***


*Spraying Systems Co.®*

# Compact Electric AutoJet® Spray Gun Specifications

### Performance Data

| | |
|---|---|
| Length | 3-3/4" (95 mm) |
| Weight | 11 oz. (0.3 kg) |
| Power | 24 V.D.C., 0.5 AMPS |
| Maximum Liquid Pressure | 125 psi (9 bar) |
| Maximum Air Pressure | 100 psi (7 bar) |

### Dimensions

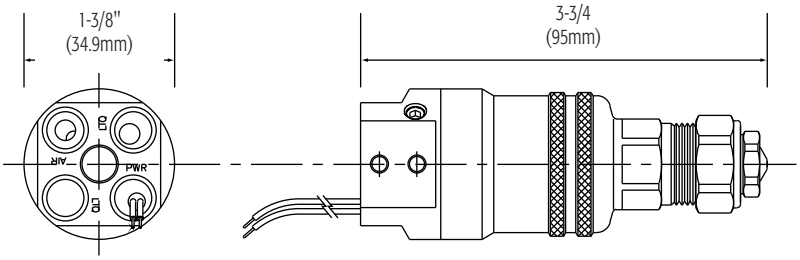


### Ordering Information

| AA28JJAU-46090 with Shut-Off Needle | |
|---|---|
| Fluid Cap 46251- | Air Cap CP-46093 |
| 1050-ES-SS | |
| 1250-ES-SS | |
| 1650-ES-SS | 64-SS |
| 2050-ES-SS | 70-SS |
| 2850-ES-SS | |

| AA28JJAU-46090-12 with Clean-Out Needle | |
|---|---|
| Fluid Cap 46251- | Air Cap CP-46093 |
| 1650-ES-SS | 64-SS |
| | 70-SS |

### How to Order:

Specify Model Number. Example: AA28JJAU-46090 (with shut-off needle) or AA28JJAU-46090-12 (with clean-out needle)

Specify Fluid Cap Number. Example: 46251-1650-ES-SS

Specify Air Cap Number. Example: CP46093-70-SS


*Spraying Systems Co.®*

P.O. Box 7900 • Wheaton, Illinois 60189-7900 USA
Phone 1-800-95-SPRAY • Fax 1-888-95-SPRAY
*Outside the U.S., Phone 1(630) 665-5000 • Fax 1(630) 260-0842*
***Visit our Web Site: http://www.spray.com***


**Represented by:**


Bulletin No. 490
Printed in U.S.A.

ISO 9001
Certified by BVQI



© Spraying Systems Co. 1998