
LOW-COST HOLLOW-TUBE THERMOCOUPLE

STYLE LC

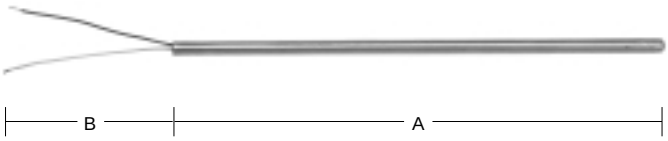

- Maximum temperature from 400°F to 1300°F (204°C to 704°C) based on wire type.
- J, K, T, E, N calibrations available
- Epoxy or ceramic potting material
- Stainless steel sheath

ORDERING INFORMATION

L	C	1	2	–	3	4	4	4	–	5	6	6	6	–	7	8	9	–	10	10	10	11	12

To create an ordering code fill in the boxes above with the appropriate number and/or letter from the corresponding box below.

Box 1: Calibration Code
J = J Type, ANSI Standard Tolerances
K = K Type, ANSI Standard Tolerances
T = T Type, ANSI Standard Tolerances
N = N Type, ANSI Standard Tolerances
E = E Type, ANSI Standard Tolerances

Box 2: Number of Junctions
1 = Single (Standard)
2 = Duplex (Not available in 1/8" sheath)

Box 3: Junction*
G = Grounded
U = Ungrounded
E = Exposed
** Dual ungrounded and exposed junctions are isolated*

Box 4: Sheath O.D. *enter 3 digit code*
125 = 1/8"
188 = 3/16"
250 = 1/4"

Box 5: Sheath Material
A = 304 SS
B = 316 SS

Box 6: Sheath Length "A"
fill in measurement desired
Whole inches: 002" to 999"
(Lengths over 999" consult TTI)

Box 7: Lead Wire Construction
A = Solid
B = Stranded

Box 8: Lead Wire Insulation
G = Fiberglass (900°F/482°C)
Q = High Temp Fiberglass (1300°F/704°C)
T = Teflon (400°F/204°C)
K = Kapton (500°F/260°C)

Box 9: Lead Wire Protection
N = None
B = SS Overbraid

Box 10: Lead Wire Length "B" *fill in measurement desired*
Whole inches: 000" to 999"
(Lengths over 999" consult TTI)

Box 11: Termination
A = 3/4" Stripped Leads
B = Spade Lugs
C = Spade Lugs with BX Connector
D = Standard Male Plug (350°F/177°C)
E = Medium-Temp. Male Plug (500°F/260°C)
F = High-Temp. Male Plug (800°F/426°C)
G = Standard Female Jack (350°F/177°C)
H = Medium-Temp. Female Jack (500°F/260°C)
J = High-Temp. Female Jack (800°F/426°C)
K = Miniature Male Plug (350°F/177°C)
L = Miniature Med-Temp. Male Plug (500°F/260°C)
M = Miniature Female Jack (350°F/177°C)
N = Miniature Med-Temp. Female Jack (500°F/260°C)

Box 12: Special Limits of Error
N = None
S = Special Tolerance Wire